

V SERIES LINEAR VELOCITY TRANSDUCER



Self-generating tachometer

The V series linear velocity transducer incorporates a self-generating tachometer which eliminates the need for any external power supply. Extra long brush life, excellent stability and a wide operating temperature range make the V series transducer highly reliable for long term service.

SPECIFICATIONS

General

Construction	Aluminum Cover & Baseplate
Sensing Device.....	tacho-generator
Connector	MS3102A-14S-6P
Wire Rope.....	Ø.016 Stainless Steel
Wire Rope Tension.....	See Table 5
Wire Rope Inbound Acceleration	See Table 5
Weight	1.2 lb. (0.54 Kg) to 50" 1.54 lb. (0.70 Kg) 60" & 80"
Dimensional Information.....	See Supplemental Data ² , Fig. 1 & 2
Options and Accessories.....	See Supplemental Data ²

TABLE 5

MEASUREMENT RANGE (Inch)	VELOCITY OUTPUT		WIRE ROPE TENSION		WIRE ROPE ACCEL		WEIGHT	
	(mV per in/sec)	(mV per cm/sec)	(oz)	(N)	(G's)	(lb)	(Kg)	
2, 10	200	78	34	9.5	33	1.20	0.54	
3, 15, 30	136	53	24	6.7	30	1.20	0.54	
4, 20, 40	102	40	24	6.7	36	1.20	0.54	
5, 25, 50	82	32	34	9.5	33	1.20	0.54	
60	69	27	24	6.7	27	1.54	0.70	
80	52	20	19	5.3	16	1.54	0.70	


Electrical

Output.....	See Table 5
Linearity.....	±0.10% F.S. within 25 Volt output
Ripple	3% Max.
Input.....	None Required; Self Generating
Output Impedance.....	350Ω
Thermal Effects	0.01% Max. per Degree C through Range -20°C to 75°C

Environmental

Operating temperature.....	-40°C to +95°C
Storage Temperature	-55°C to +100°C
Operating humidity	90% R.H. max. Non-condensing
Vibration	10G's to 2KHz
Shock.....	50 G's 0.1 ms Max.
Ingress Protection	NEMA 1, IP-40

CONNECTION DIAGRAM



FOOTNOTES

1. Maximum cable retraction acceleration.
2. Supplemental Data section located at end of Standard Series pages.

Model Number Configuration

Range

2.....	2' (50 mm)
3.....	3' (75 mm)
4.....	4' (100 mm)
5.....	5' (125 mm)
10.....	10' (250 mm)
15.....	15' (390 mm)
20.....	20' (500 mm)
25.....	25' (640 mm)
30.....	30' (750 mm)
40.....	40' (1000 mm)
50.....	50' (1250 mm)
60.....	60' (1500 mm)
80.....	80' (2000 mm)

Wire Rope

*.....	Ø.016 (0,4 mm) Stainless Steel
NJC.....	Ø.018 (0,45 mm) Nylon Jacketed Stainless Steel

Wire Rope Tension

*.....	Standard (50 G units to 50")
004.....	Reduced (see Table 7 for value)

Wire Rope Exit Direction

*.....	Top Exit
CES.....	Side Exit
CEB.....	Bottom Exit

Electrical Interface

*.....	Mating Connector Included
TS.....	Terminal Strip
L3M.....	Mating Conn with 3 m (10') electrical cable
L4M.....	Mating Conn with 4 m (13.5') electrical cable
L5M.....	Mating Conn with 5 m (16.5') electrical cable
L6M.....	Mating Conn with 6 m (20') electrical cable
L7M.....	Mating Conn with 7 m (23') electrical cable

Connector Location

*.....	Standard Location
S3.....	Rear Side
S5.....	Top

Dust Wiper Option

*.....	No dust wiper
DS.....	Dust Wiper Installed

NOTE

- 1) *—Asterisk items are standard configuration. No option designator is required.
- 2) Shaded options available at additional cost.
- 3) See Supplemental Data for options.

Example
V-50-NJC-DS-S3

STANDARD SERIES SUPPLEMENTAL DATA




ADDITIONAL OPTIONS

OPTION	OPTION DESIGNATOR	DESCRIPTION
Nylon jacketed wire rope	NJC	Replaces standard stainless steel wire rope with Ø.018 nylon jacketed wire rope. Increases wire rope life dramatically but may increase non-linearity by as much as ±0.05% of full scale.
Reduced Wire Rope Tension	004	Reduces the overall tension in the wire rope and increases wire rope life. Dynamic response of the transducer is reduced due to the reduced inbound acceleration capability.
Increased Wire Rope Tension	HG	Increases tension in the wire rope which increases the dynamic response of the transducer. On selected units with range of 50" (1250 mm) or less, inbound acceleration capability is 100G's. Wire rope life may be adversely affected by the HG option.
Dust wiper	DS	Lubricated wiper strips dust and debris from wire rope as it retracts into case. Adds 0.36" (9 mm) height to wire rope exit location.
Terminal strip	TS	Replaces connector with a terminal strip.
Reversed output	R	Output is at a maximum when wire rope is fully retracted. Output decreases as wire rope is extended. Does not apply to velocity signal.
Non-standard potentiometer (applies to PA series only)	PXK	Replace "X" in option designator with required potentiometer value in K ohms. Non-standard potentiometer linearity is as follows: Ranges 0 to 2" to 0 to 5" ±1.00% of full scale Ranges 0 to 10" to 0 to 25" ±0.50% of full scale Ranges 30" and above ±0.25% of full scale Note: This option is subject to potentiometer availability.

ACCESSORIES

10067 Auxiliary Wire Rope Extension Kit



The auxiliary wire rope extension may be used to facilitate mounting the transducer remotely from the measurement point. The clip on the extension attaches to the eye fitting on the transducer. The eye fitting on the opposite end which is identical to the fitting on the transducer mounts to the moving element. The extension kit is also available with the clip end unterminated for situations where it is more convenient to size the wire rope length during installation. The clip and crimp sleeve are included as loose parts for user termination.

Dimension "L"

Specify dimension "L" in centimeters to the nearest whole centimeter.

Note 1. 1 cm = 0.394", 1 inch = 2.54 cm

Note 2. Shortest length "L" is 5 cm (approximately 2").

10067- CM-

* Completed kit (no designator required)

U Unterminated clip end

(clip and crimp sleeve included in kit)

* Leave blank. No designator required.

Replacement Wire Rope Kit

The replacement Wire Rope Kit includes a new wire rope with all end terminations, wire rope guide, felt dust wiper where applicable and installation instructions. To order, replace 'xx' in the part number with the applicable measurement range in inches.

10107-xx Replacement Wire Rope Kit—Standard Ø.016" stainless steel wire rope.

10108-xx Replacement Wire Rope Kit—NJC option, Ø.018" nylon jacketed stainless steel wire rope.

10127-xx Replacement Wire Rope Kit—DS option, Standard Ø.016" stainless steel wire rope with dust wiper.

10128-xx Replacement Wire Rope Kit—NJC and DS options, Ø.018" nylon jacketed stainless steel wire rope with dust wiper.

STANDARD SERIES SUPPLEMENTAL DATA



ADDITIONAL SPECIFICATIONS


TABLE 7

PA, PB, P420, P510, P1010 SERIES						EP Series		V & VP Series	
Range Designator	Range (in) (mm)	Wire Rope Standard Tension (Nominal) (oz) (N)	Wire Rope Standard Acceleration (G's)	Wire Rope Reduced Tension (004 option) (oz) (N)	Wire Rope Reduced Acceleration (004 option) (G's)	Wire Rope Reduced Tension (004 option) (oz) (N)	Wire Rope Reduced Acceleration (004 option) (G's)	Wire Rope Reduced Tension (004 option) (oz) (N)	Wire Rope Reduced Acceleration (004 option) (G's)
2	2 50	34 9.5	>50	16 4.4	28	—	—	16 4.4	14
3	3 75	24 6.7	>50	14 3.9	16	—	—	14 3.9	15
4	4 100	24 6.7	>50	11 3.1	12	—	—	11 3.1	15
5	5 125	34 9.5	>50	8 2.2	7	—	—	8 2.2	6
10	10 250	34 9.5	>50	16 4.4	28	16 4.4	19	16 4.4	14
15	15 390	24 6.7	>50	14 3.9	16	—	—	14 3.9	15
20	20 500	24 6.7	>50	11 3.1	12	—	—	11 3.1	14
25	25 640	34 9.5	>50	8 2.2	7	8 2.2	7	8 2.2	6
30	30 750	24 6.7	>50	14 3.9	16	—	—	14 3.9	15
40	40 1000	24 6.7	>50	11 3.1	12	—	—	11 3.1	12
50	50 1250	34 9.5	>50	8 2.2	7	8 2.2	7	8 2.2	5
60	60 1500	24 6.7	27	7 1.8	2	7 1.8	5	7 1.8	6
80	80 2000	19 5.3	16	5 1.4	2	5 1.4	2	5 1.4	3

DIMENSIONAL INFORMATION

VP (VELOCITY-POSITION) Series

ALL MEASUREMENT RANGES

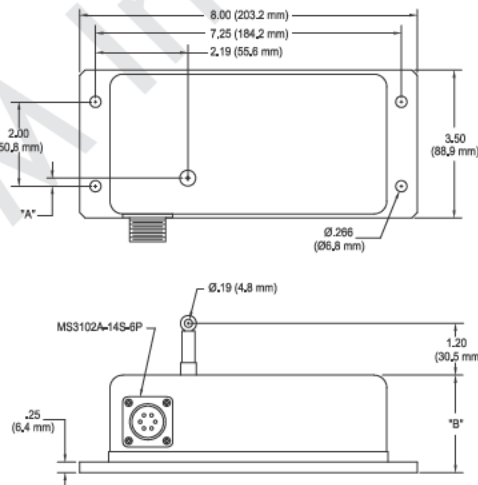

RANGE	"A" (in) (mm)	"B" (in) (mm)
2", 10"	0.66 16.8	2.25 57.0
3", 15", 30"	0.51 12.9	2.25 57.0
4", 20", 40"	0.35 8.8	2.25 57.0
5", 25", 50"	0.19 4.8	2.25 57.0
60"	0.04 1.0	3.25 82.6
80"	-0.28 -7.1	3.25 82.6

Figure 3