

HSI 750 Series

Hermetically Sealed 4-20 mA LVDT Position Transmitters



Features

- Measurement ranges of 1 inch to 10 inches
- 4 to 20 mA input/output
- Non-linearity less than $\pm 0.25\%$ of FRO
- Hermetically sealed for harsh environments
- In-line connector, mating plug included

Applications

- Control Valve Position Indication
- Waste Water Treatment Facilities
- Pumping Station Controls
- Fossil Fueled Power Plants
- Agri-chemical Dispensing

Description

The HSI 750 Series of 3/4 inch diameter, loop-powered 4-20 mA LVDT position transmitters is designed for a wide range of position monitoring and feedback applications. These rugged and robust devices are constructed entirely of TIG-welded stainless steel and hermetically sealed against hostile environments to IEC standard IP-68. The input/output connections are made through a sealed axial connector, and a mating connector plug is supplied with each unit.

HSI 750 Series transmitters offer the frictionless operation, high resolution, excellent repeatability, and low hysteresis associated with LVDT technology, along with the convenience and simplicity of a precalibrated 4-20 mA current loop operation. Either 2-wire loop-powered or 3-wire sourcing externally powered, the built-in electronics operate over a wide range of loop supply voltages and resistances, and are designed to operate with many PLCs, digital indicators, A/D converters, computer-based data processors, and QC data collection systems.



Available in ranges of 1 inch (25 mm) to 10 inches (250 mm), the maximum linearity error for an HSI 750 Series sensor is $\pm 0.25\%$ of full range output using a statistically best-fit straight line derived by the least squares method.

HSI 750 position transmitters have an open bore at one end into which the LVDT's core enters. Normally, loop current will be 4 mA when the core is first inserted, increasing to 20 mA when the core is at full range within the transmitter's body. For position sensing that requires the opposite directional sense, HSI 750 transmitters are available with reversed output slope, which gives 20 mA when the core is first inserted, decreasing to 4 mA as the core moves inward. HSI 750 LVDTs are also available with metric-threaded cores and/or low friction Teflon™ bore liners, the ordering information for which is detailed on the reverse page.

General Specifications

- Loop Supply Voltage:** 8 V to 28 V DC
- Loop Resistance (Max.):** See graph below
- Output:** 4-20 mA
- Output Noise & Ripple:** <10 μ Arms
- Frequency Response (-3dB):** 50 Hz (nominal)
- Linearity Error:** < \pm 0.25% of FRO
- Repeatability Error:** <0.01% of FRO
- Hysteresis Error:** <0.01% of FRO
- Operating Temperature:** -20°F to +175°F (-30°C to +79°C)
- Thermal Coefficient of Scale Factor:** -0.015%/°F (nominal) (-0.027%/°C nominal)
- Vibration Tolerance:** 20 g to 2 kHz
- Shock Survival:** 100 g, 11 ms

Maximum Loop Resistance vs. Loop Supply Voltage

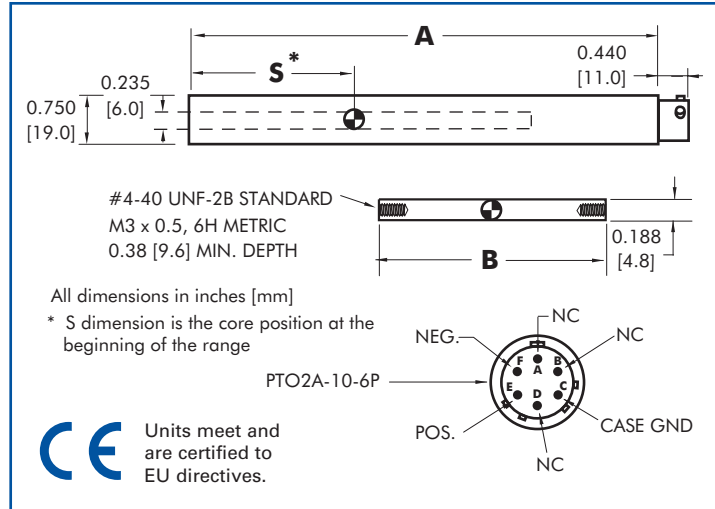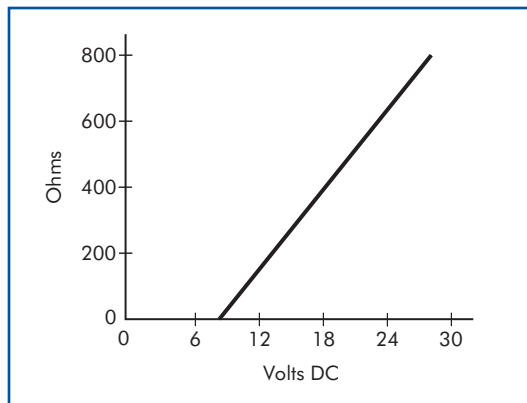

Specifications

Model	HSI 750 -1000	HSI 750 -2000	HSI 750 -4000	HSI 750 -6000	HSI 750 -10000
Nominal Range (inches)	1.00	2.00	4.00	6.00	10.00
Nominal Range (mm)	25	50	100	150	250
Scale Factor (mA/inch)	16.0	8.0	4.0	2.67	1.6
Scale Factor (mA/mm)	0.63	0.315	0.157	0.105	0.063
Dimension "A" (inches)	7.35	8.70	12.20	14.95	19.95
Dimension "A" (mm)	186.7	221.0	309.9	379.7	506.7
Dimension "B" (inches)	3.45	3.45	5.30	6.20	6.20
Dimension "B" (mm)	87.6	87.6	134.6	157.5	157.5
Dimension "S" (inches)	2.04	2.31	2.97	3.38	3.93
Dimension "S" (mm)	51.8	58.7	75.4	85.9	99.8
Weight, Body (ounces)	4.4	5.4	7.3	9.3	13.2
Weight, Body (grams)	124	153	207	263	374
Weight, Core (ounces)	0.40	0.40	0.65	0.78	0.78
Weight, Core (grams)	11.6	11.6	18.4	22.1	22.1

Ordering Information

For standard HSI 750, order by model number with range.
 For reversed output HSI 750, order by model number with range and add suffix "R".
 For HSI 750 with metric threaded core, order as above and add -006 after range.
 For HSI 750 with Teflon™ bore liner, order as above and add -010 after range.
 For metric threaded core and Teflon™ bore liner, order as above and add -016 after range.
 For accessories, please visit our website at www.macrosensors.com.



Innovators in Position Sensing

All specifications subject to change without notice.
 © 2007 Macro Sensors 01/04/07