

HSA 750-006 Series

Hermetically Sealed AC-LVDT Position Sensors

Features

- Ranges of ± 1 mm to ± 250 mm
- In-line connector, mating plug included
- Environmentally sealed to IEC IP-68
- Non-linearity less than $\pm 0.25\%$ of FRO

Applications

- Machine tool positioners
- Materials testing extensometers
- Hydraulic cylinder position
- Valve position sensing
- Automatic assembly equipment
- Corrosive environments

Description

Macro Sensors' HSA 750 Series of 19.0 mm diameter AC-operated LVDTs is designed for a wide range of position measurement applications. These are rugged hermetically sealed sensors, constructed entirely of stainless steel, and intended for general industrial use. The coil windings are sealed against hostile environments to IEC standard IP-68 and electrical termination is through a sealed axial connector. The mating connector plug is supplied with the unit.

Available in ranges of ± 1 mm to ± 250 mm, HSA 750 Series sensors feature the high resolution, excellent repeatability, and low hysteresis associated with LVDT technology, as well as the highest sensitivity consistent with good linearity. The maximum linearity error for any of these sensors is $\pm 0.25\%$ of full range output using a statistically best-fit straight line derived by the least squares method.


Macro Sensors offers several standard options that permit a user to customize HSA 750 LVDTs, including Teflon® bore liners and smaller diameter, low mass cores. In addition, Macro Sensors can provide a range of mounting accessories and core extension rods. On special order, the HSA 750 Series can be constructed for resistance to mild nuclear radiation, as well as for immersion in pressurized fluids and to withstand higher operating temperatures.

All HSA 750 Series LVDTs will operate properly with any conventional differential input LVDT signal conditioners, but operation with ratiometric LVDT signal conditioning is not recommended. Macro Sensors offers a full line of LVDT signal conditioners that will deliver optimum performance from any HSA 750 Series LVDT. For more information, please visit our website at www.macrosensors.com.

PM INSTRUMENTATION, 59 rue Emile Deschanel, 92400 Courbevoie, France
Tel : 01 46 91 93 30, Fax : 01 46 91 93 39, Web : www.pm-instrumentation.com

General Specifications

- Input Voltage:** 3.0 V_{rms} (nominal)
- Input Frequency:** 2.5 to 3.0 kHz
- Linearity Error:** $\pm 0.25\%$ of FRO
- Repeatability Error:** <math>< 0.01\%</math> of FSO
- Hysteresis Error:** <math>< 0.01\%</math> of FSO
- Operating Temperature:** -55°C to +105°C
- Thermal Coefficient of Sensitivity:** -0.02%/°C (nominal)
- Vibration Tolerance:** 20 g to 2 kHz
- Shock Survival:** 1000 g, 11 ms

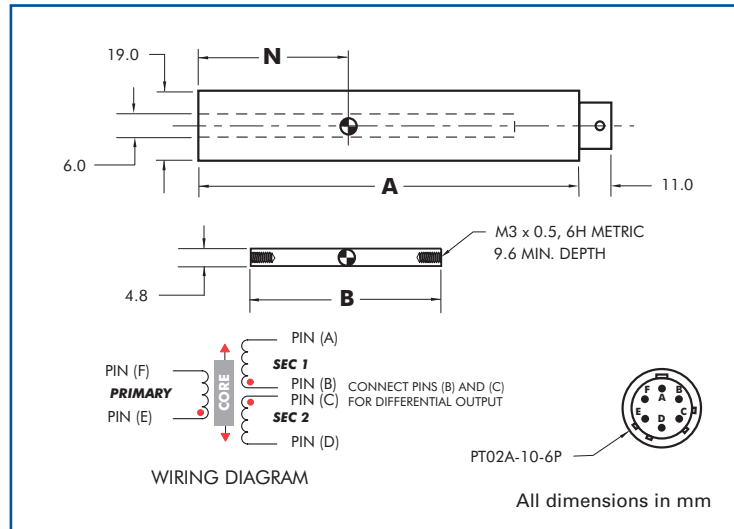

Specifications

Model ▶	HSA 750 -050	HSA 750 -125	HSA 750 -250	HSA 750 -500	HSA 750 -1000	HSA 750 -2000	HSA 750 -3000	HSA 750 -4000	HSA 750 -5000	HSA 750 -10000
Nominal Range (mm)	±1	±3	±6	±12.5	±25	±50	±75	±100	±125	±250
Sensitivity (mV/V/mm)	240	154	96	25	24	15	9.8	6.7	4.7	2.8
Primary Impedance (Ω)	325	735	1400	1200	1250	2150	2150	420	600	620
Dimension "A" (mm)	51.1	67.1	85.1	150.4	187.5	277.1	346.1	411	473.7	804
Dimension "B" (mm)	20.3	31.7	41.9	87.6	87.6	134.6	157.5	157.5	157.5	241.3
Dimension "N" (mm)	16	24	33	65	84	129	160	194	227	392
Weight - Body (g)	45	59	71	93	122	176	232	260	283	519
Weight - Core (g)	2.4	3.7	4.8	11.6	11.6	18	22	22	22	34

Ordering Information

For Teflon® bore liner option, add -010 after model number with range.
 For small diameter core option, add -020 after model number with range.
 For multiple options, add sum of dash numbers after model number with range.
 For accessories and compatible support electronics, please visit our website at www.macrosensors.com.

PM INSTRUMENTATION, 59 rue Emile Deschanel, 92400 Courbevoie, France
Tel : 01 46 91 93 30, Fax : 01 46 91 93 39, Web : www.pm-instrumentation.com



Innovators in Position Sensing

All specifications subject to change without notice.
 © 2007 Macro Sensors 07/02/07

7300 US Route 130 North, Bldg. 22
 Pennsauken, NJ 08110-1541 USA
 tel: 856-662-8000
 fax: 856-317-1005
www.macrosensors.com
lvdts@macrosensors.com

