

SE 750-006 Series

General Purpose DC-LVDT Position Sensors



Features

- Ranges of 2.5 mm to 500 mm
- 24 V DC input, precalibrated 0 to 10 V DC output
- Non-linearity less than or equal to $\pm 0.25\%$ of FSO (less than or equal to $\pm 0.10\%$ optional)
- Industry-standard 19 mm diameter
- Through-bore design
- Sealed to IEC IP-62

Applications

- Machine tool positioners
- Materials testing extensometers
- Hydraulic cylinder position
- Valve position sensing
- Automatic assembly equipment

Description

Macro Sensors' SE 750 Series of 19 mm DC-operated LVDTs are designed for a wide range of position measurement applications. They use built-in electronics to provide the desirable features of an AC-LVDT, such as frictionless operation and dynamic response, with the added convenience and simplicity of DC input and precalibrated DC output. They are designed to operate in conjunction with PLCs, digital indicators, A/D converters, computer-based data processors, and QC data collection systems.

The SE 750 Series offers nine standard ranges from 2.5 mm to 500 mm that will accommodate many application requirements. The maximum linearity error for an SE 750 Series sensor is $\pm 0.25\%$ of full range output using a statistically best-fit straight line derived by the least squares method. A linearity error of less than or equal to $\pm 0.10\%$ of full scale output is available as an option.

SE 750 Series sensors provide highly reliable, contactless operation with the high resolution, excellent repeatability, and low hysteresis associated with LVDT technology. Their exceptional reliability is a result of manufacturing processes and assembly techniques developed and optimized by Macro Sensors over many years of manufacturing LVDT sensors. Their stainless steel housings act as magnetic shields to reduce the effects of external AC magnetic fields, and their sealing meets IEC standard IP-62.

Teflon[®] bore liners are also available as an option for SE 750 Series LVDTs. In addition, Macro Sensors can provide a range of mounting accessories, core extension rods and DC power supplies.

PM INSTRUMENTATION, 59 rue Emile Deschanel, 92400 Courbevoie, France
Tel : 01 46 91 93 30, Fax : 01 46 91 93 39, Web : www.pm-instrumentation.com

General Specifications

Input Power: 24 V DC (nominal)
 12-26 V DC \equiv
 25 mA (max.)

Full Scale Output: 0 to 10 V DC

Output Noise & Ripple: < 5 mV_{rms}

Frequency Response (-3dB): 250 Hz (nominal)

Linearity Error: $\leq \pm 0.25\%$ of FSO
 ($\leq \pm 0.10\%$ of FSO optional)

Repeatability Error: < 0.01% of FSO


Hysteresis Error: < 0.01% of FSO

Operating Temperature: -20°C to +70°C

Thermal Coefficient of Scale Factor: -0.027%/°C (nominal)

Vibration Tolerance: 20 g to 2 kHz

Shock Survival: 100 g, 11 ms

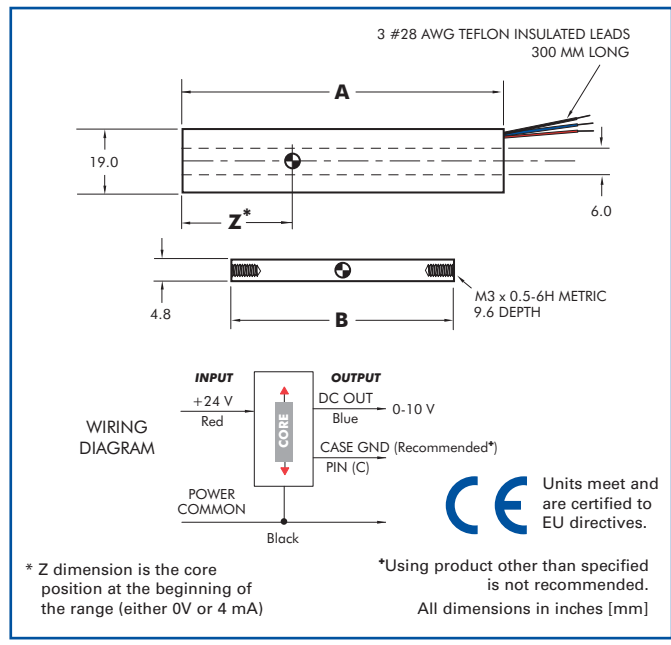

Specifications

Model ▶	SE 750 -100	SE 750 -250	SE 750 -500	SE 750 -1000	SE 750 -2000	SE 750 -4000	SE 750 -6000	SE 750 -10000	SE 750 -20000
Nominal Range (mm)	2.5	6.3	12.7	25.4	50.8	101.6	152.4	254	508
Scale Factor (V/mm)	4.0	1.6	0.8	0.4	0.2	0.1	0.06	0.04	0.02
Dimension "A" (mm)	72.5	88.3	107.7	171.2	209.3	284.7	368.0	495.0	822.5
Dimension "B" (mm)	20.3	31.7	41.9	87.6	87.6	134.6	157.5	157.5	241.3
Dimension "Z" (mm)	14.7	25.4	27.9	52.6	59.2	78.0	87.6	100.3	137.7
Weight - Body (g)	50	64	80	104	158	212	268	318	445
Weight - Core (g)	2.4	3.7	4.8	11.6	11.6	18.0	22.0	22.0	34.0

Ordering Information

Order by model number with range.
 For Teflon® bore liner option, add -010 after model number with range.
 For $\pm 0.10\%$ of FSO linearity error option, add -200 after model number with range.
 For combinations of options, add option numbers together (eg. -216, -210, -206, -200, -016, -010, -006).
 For accessories, please visit our website at www.macrosensors.com.

PM INSTRUMENTATION, 59 rue Emile Deschanel, 92400 Courbevoie, France
Tel : 01 46 91 93 30, Fax : 01 46 91 93 39, Web : www.pm-instrumentation.com



Innovators in Position Sensing

All specifications subject to change without notice.
 © 2007 Macro Sensors 12/31/07

