


Model 1200 Flange Load Cell

Why the Interface model 1200 Flange Load Cell is the best in class:

- Standard flange design mounts directly to cylinders
- Proprietary Interface temperature compensated strain gages
- Performance to .05%
- Eccentric load compensated
- .0008%/°F (.0015%/°C) temp. effect on output
- Low deflection
- Shunt calibration
- Barometric compensation
- Tension and compression

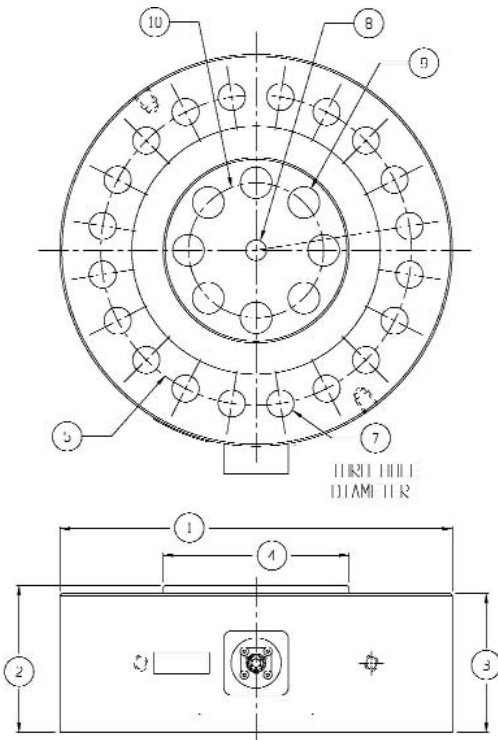

DIMENSIONS

See Drawing	MODEL									
	1228		1238		1248		1258		1268	
	CAPACITY									
	U.S. (lbf)	Metric (kN)	U.S. (lbf)	Metric (kN)	U.S. (lbf)	Metric (kN)	U.S. (lbf)	Metric (kN)	U.S. (lbf)	Metric (kN)
	30K	140kN	55K	250kN	110K	500kN	220K	1000kN	330K	1500kN
	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm
①	6.06	153.9	8.00	203.2	11.00	279.4	12.00	304.8	15.50	393.7
②	1.75	44.5	2.5	63.5	3.50	88.9	4.5	114.9	5.50	139.7
③	1.63	41.4	2.25	57.2	3.00	76.2	4.25	108.0	5.00	127.0
④	2.65	67.3	3.76	95.5	4.81	122.2	5.68	144.3	7.75	196.9
⑤	5.13	130.3	6.50	165.1	9	228.8	9.50	241.3	12.68	322.1
⑥	15°		11.25°		11.25°		9.0°		7.5°	
⑦	0.41	10.4	0.50	12.7	0.66	16.8	0.83	21.0	0.97	24.6
	12 places		16 places		16 places		20 places		24 places	
⑧	0.316	8.03	0.631	16.02	0.631	16.02	0.631	16.02	0.788	20.02
⑨	0.41	10.4	0.65	16.5	0.65	16.5	0.97	24.6	0.97	24.6
	8 places		8 places		8 places		8 places		12 places	
⑩	1.77	45.0	2.80	71.0	2.80	71.0	4.13	105.0	5.91	150.0

Dimensions are approximate. Contact factory for current drawings.

SPECIFICATIONS

PARAMETERS	MODEL				
	1228	1238	1248	1258	1268
	CAPACITY				
U.S. Models (lbf)	30K	55K	110K	220K	330K
Metric Models (kN)	140kN	250kN	500kN	1000kN	1500kN
ACCURACY – (MAX ERROR)					
Static Error Band–% FS	±0.05	±0.05	±0.06	±0.10	±0.12
Nonlinearity–% FS	±0.05	±0.05	±0.07	±0.10	±0.12
Hysteresis–% FS	±0.05	±0.05	±0.06	±0.10	±0.12
Nonrepeatability–% RO	±0.01	±0.01	±0.01	±0.01	±0.01
Creep, in 20 min–%	±0.025	±0.025	±0.025	±0.025	±0.025
Side Load Sensitivity–%	±0.25	±0.25	±0.25	±0.25	±0.25
Eccentric Load Sensitivity–%/in	±0.25	±0.25	±0.25	±0.25	±0.25
TEMPERATURE					
Compensated Range–°F	15 to 115	15 to 115	15 to 115	15 to 115	15 to 115
Compensated Range–°C	-10 to 45	-10 to 45	-10 to 45	-10 to 45	-10 to 45
Operating Range–°F-65 to 200	-65 to 200	-65 to 200	-65 to 200	-65 to 200	-65 to 200
Operating Range–°C-55 to 90	-55 to 90	-55 to 90	-55 to 90	-55 to 90	-55 to 90
Effect on Zero–%RO/°F – MAX	±0.0008	±0.0008	±0.0008	±0.0008	±0.0008
Effect on Zero–%RO/°C – MAX	±0.0015	±0.0015	±0.0015	±0.0015	±0.0015
Effect on Output–%/°F – MAX	±0.0008	±0.0008	±0.0008	±0.0008	±0.0008
Effect on Output–%/°C – MAX	±0.0015	±0.0015	±0.0015	±0.0015	±0.0015
ELECTRICAL					
Rated Output–mV/V (Nominal)	2.2	2.2	2.2	2.2	2.2
Excitation Voltage–VDC – MAX	20	20	20	20	20
Bridge Resistance–Ohm (Nominal)	350±3.5	350±3.5	350±3.5	350±3.5	350±3.5
Zero Balance–% RO	±1.0	±1.0	±1.0	±1.0	±1.0
Insulation Resistance–Megohm	5000	5000	5000	5000	5000
MECHANICAL					
Safe Overload–% CAP	±150	±150	±150	±150	±150
Deflection @ RO–inch	0.001	0.002	0.004	0.005	0.006
Natural Frequency–kHz	7	5.9	4.4	5	5.1
Weight–lb	9.5	26	71	100	204
Weight–kg	4.3	11.8	32.2	46.7	92.5
Connector	PT02E-10-6P	PT02E-10-6P	PT02E-10-6P	PT02E-10-6P	PT02E-10-6P
Calibration	T & C	T & C	T & C	T & C	T & C

OPTIONS

Integral 10 ft Cable
 PC04E-10-6P Connector
 Multiple Bridge
 Standardized Output
 Connector Protection
 Transducer Electronic Data Sheet (TEDS)

ACCESSORIES

Mating Connector
 Instrumentation

Consult factory for more technical information