


N.b. ROD-EYE ORIENTATION NOT GUARANTEED.

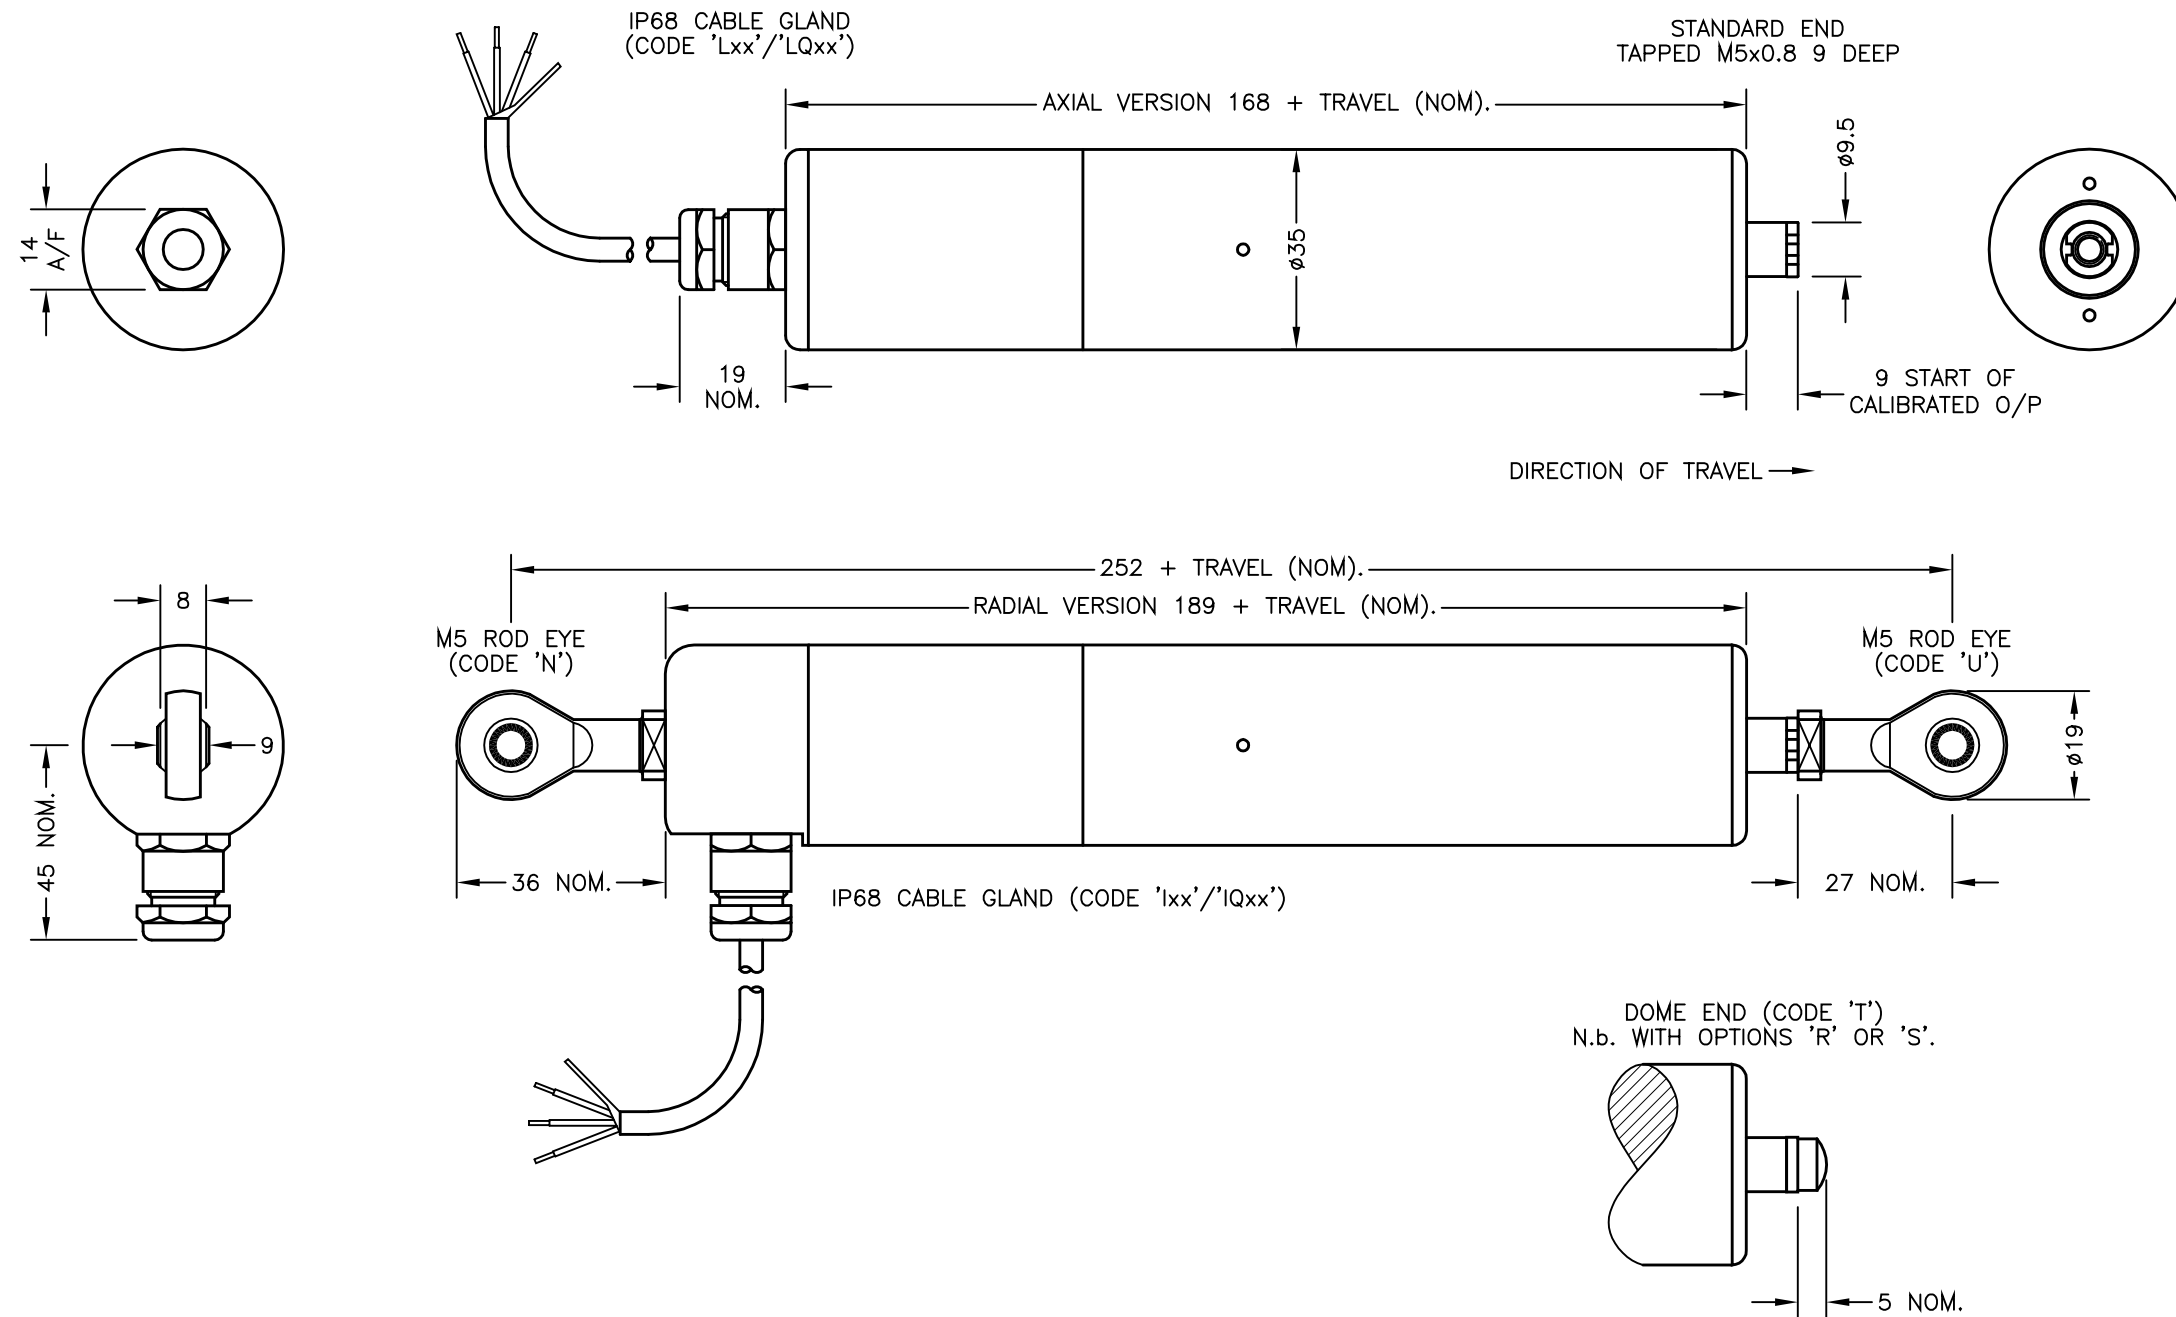

ELECTRICAL OPTIONS/ SPECIFICATIONS

OUTPUT SUPPLY
 0.5 TO 4.5V RATIO METRIC 5V
 SUPPLY CURRENT 12mA TYP. 20mA MAX.


CABLE: 0.2mm², O/A SCREEN, PUR JACKET – SUPPLIED WITH 50cm OR REQUIRED LENGTH IN cm (15000cm MAX).
 STANDARD 3-CORE: JACKET Ø4mm BLACK e.g. 'L50'
 OPTIONAL 5-CORE: JACKET Ø4.6mm BLUE e.g. 'LQ50'

CONNECTIONS:
 3 CORE 5 CORE
 RED RED +Ve
 - ORG +SENSE (5-WIRE ONLY)
 BLACK BLACK 0V
 - GRY -SENSE (5-WIRE ONLY)
 WHITE WHITE OUTPUT
 SCREEN SCREEN BODY

RANGE OF DISPLACEMENT FROM 0-5mm TO 0-800mm e.g.76, IN INCREMENTS OF 1mm.

BODY MATERIAL: STAINLESS STEEL 316.

FURTHER OPTIONS:
 SINGLE PAIR OF BODY CLAMPS 'P'
 TWO PAIRS OF BODY CLAMPS 'P2'
 SPRING RETURN PUSH-ROD, TRAVEL ≤300mm
 RETURN TO EXTENDED POSITION (CODE 'R')
 RETURN TO RETRACTED POSITION (CODE 'S')
 PUSH-ROD FREE (CODE 'V') – NOT AVAILABLE WITH SPRUNG OPTIONS.

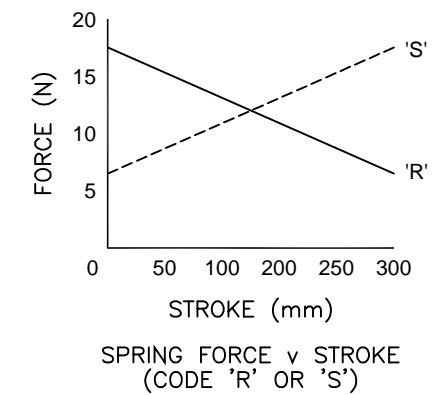

NOTE:- READ INSTALLATION SHEET X114-19 FOR FULL INSTRUCTIONS FOR USE.

ATEX / IECEx APPROVED TO
 II 1G
 Ex ia IIC T4 Ga (Ta= -40° to +80°C)
 Ui 11.4V, Ii 0.2A, Pi 0.51W

APPROVED FOR USE IN CONJUNCTION WITH A GALVANICALLY ISOLATED BARRIER.

NOTE: APPROVAL ONLY APPLIES AT NORMAL ATMOSPHERIC PRESSURE!


MAXIMUM WORKING DEPTH: 100 METRES/328 FEET. WHERE THE FREE END OF THE CABLE IS TO BE TERMINATED IN A SUBMERGED POSITION, ADEQUATE SEALING MUST BE PROVIDED TO PROTECT CONNECTIONS.

THE PUSH-ROD RETRACTS A FURTHER 4mm NOM. FROM START OF CALIBRATED TRAVEL. STANDARD VERSIONS THE PUSH-ROD EXTENDS A FURTHER 8mm NOM. FROM END OF CALIBRATED TRAVEL, FOR SPRUNG VERSIONS: 'R': 1mm, 'S': 2mm. 'V' CODED PUSH-ROD WILL DEPART SENSOR BODY.

K	RAN1037 WITHDRAWN	PDM
L	RANGE WAS 50-600mm RAN1056	RDS
M	OPTION 'S' ADDED ~ RAN1108	PDM
N	5-CORE OPTION ADDED ~ RAN1102	PDM
O	RANGE NOTE AMENDED ~ RAN1200	PDM
P	THREAD FORM AMENDED ~ RAN1285	PDM



DRAWINGS NOT TO BE CHANGED WITHOUT REFERENCE TO THE CHANGE PROCEDURE. CHANGES TO PARTS USED IN INTRINSICALLY SAFE PRODUCT MUST BE APPROVED BY THE AUTHORISED PERSON
 THIS IS AN UNCONTROLLED PRINT AND WILL NOT BE UPDATED.



K	16/10/15		CHECKED BY X	±0.4		
L	09/11/15				RDM	±0.2
M	14/09/16					±0.1
N	24/04/17	DESCRIPTION				
O	05/09/17	X114 INTRINSICALLY SAFE				
P	01/04/19	SUBMERSIBLE STAND-ALONE LINEAR POSITION SENSOR				
SCALE 12.5mm		DRAWING NUMBER X114-11		REV P		
		SHEET 1 OF 1				