

Data sheet

# FxiS / FxeS



## Technical data

| Type                      | -  | F0iS             | F0eS             | F0iS-HS      | F0eS-HS      |
|---------------------------|----|------------------|------------------|--------------|--------------|
| Accuracy class            | %  | $\leq \pm 0.05$  |                  |              |              |
| Rated torque ( $M_{dN}$ ) | Nm | 50<br>100<br>200 | 50<br>100<br>200 | 500<br>1,000 | 500<br>1,000 |

| Torque measuring system   |    |   |                  |              |              |
|---|----|---|------------------|--------------|--------------|
| Technology  | -  | Rotating  |                  |              |              |
| Rated torque ( $M_{dN}$ ) #1  | Nm | 50<br>100<br>200                                    | 50<br>100<br>200 | 500<br>1,000 | 500<br>1,000 |
| Rated torque short measurement range (optional, minimum) ( $M_{dNS}$ ) #2 | Nm | 20<br>20<br>40                                      | 20<br>20<br>40   | 100<br>200   | 100<br>200   |
| Accuracy class extended (for $M_{dN}$ )                                   | %  | $\leq \pm 0.03$                                     |                  |              |              |
| Outputs   | -  | Frequency (RS422), Voltage, Current, CAN bus, Alert |                  |              |              |
| Test signal   | -  | see test report                                     |                  |              |              |

| Mechanical dimensions #3           |    |      |  |  |  |
|------------------------------------|----|------|--|--|--|
| Outer diameter of rotor #4         | mm | 94   |  |  |  |
| Lengths (Rotor, without centering) | mm | 74   |  |  |  |
| Pitch circle diameter #5           | mm | 75.0 |  |  |  |

| Speeds and speed measuring systems           |     |                     |        |        |        |
|--|-----|---------------------|--------|--------|--------|
| Speed detection (integrated)                 | -   | without             |        |        |        |
| Speed detection (optional)                   | -   | inductive / optical |        |        |        |
| Maximum Speed without speed detection system | rpm | 20,000              |        |        |        |
| Optional increased speed                     | rpm | 25,000              | 25,000 | 30,000 | 30,000 |
| Maximum speed with magnetic speed encoder    | rpm | N/A                 |        |        |        |
| Maximum speed with optical speed encoder #6  | rpm | up to 20,000        |        |        |        |
| Maximum speed with inductive speed encoder   | rpm | 25,000              | 25,000 | 30,000 | 30,000 |

| Torque accuracy class per output type (related to $M_{dN}$ ) |   |                 |  |  |  |
|--|---|-----------------|--|--|--|
| Frequency output   | % | $\leq \pm 0.05$ |  |  |  |
| CAN output   | % | $\leq \pm 0.05$ |  |  |  |
| Voltage output   | % | $\leq \pm 0.10$ |  |  |  |
| Current output   | % | $\leq \pm 0.10$ |  |  |  |
| Frequency output (option higher accuracy)                    | % | $\leq \pm 0.03$ |  |  |  |
| CAN (option higher accuracy)                                 | % | $\leq \pm 0.03$ |  |  |  |

## Technical data

| Type                      | -  | F0iS             | F0eS             | F0iS-HS      | F0eS-HS      |
|---------------------------|----|------------------|------------------|--------------|--------------|
| Accuracy class            | %  | $\leq \pm 0.05$  |                  |              |              |
| Rated torque ( $M_{dN}$ ) | Nm | 50<br>100<br>200 | 50<br>100<br>200 | 500<br>1,000 | 500<br>1,000 |

### Linearity deviation including hysteresis related to $M_{dN}$ #7

|                       |   |                  |
|-----------------------|---|------------------|
| Frequency, 0%...30%   | % | $\leq \pm 0.010$ |
| Frequency, 30%...60%  | % | $\leq \pm 0.020$ |
| Frequency, 60%...100% | % | $\leq \pm 0.030$ |
| CAN, 0%...30%         | % | $\leq \pm 0.010$ |
| CAN, 30%...60%        | % | $\leq \pm 0.020$ |
| CAN, 60%...100%       | % | $\leq \pm 0.030$ |
| Voltage output        | % | $\leq \pm 0.05$  |
| Current output        | % | $\leq \pm 0.05$  |

### Rel. standard deviation of the reproducibility according to DIN 1319, by reference to variation of the output signal (rel. to $M_{dN}$ )

|                  |   |                 |
|------------------|---|-----------------|
| Frequency output | % | $\leq \pm 0.03$ |
| CAN output       | % | $\leq \pm 0.03$ |
| Voltage output   | % | $\leq \pm 0.05$ |
| Current output   | % | $\leq \pm 0.05$ |

### Temperature influence per 10K in the nominal temperature range on the output signal related to the actual value of signal span (rel. to $M_{dN}$ )

|                  |   |                 |
|------------------|---|-----------------|
| Frequency output | % | $\leq \pm 0.05$ |
| CAN output       | % | $\leq \pm 0.05$ |
| Voltage output   | % | $\leq \pm 0.10$ |
| Current output   | % | $\leq \pm 0.10$ |

### Temperature influence per 10K in the nominal temperature range on the zero signal (rel. to $M_{dN}$ )

|                  |   |                 |
|------------------|---|-----------------|
| Frequency output | % | $\leq \pm 0.05$ |
| CAN output       | % | $\leq \pm 0.05$ |
| Voltage output   | % | $\leq \pm 0.10$ |
| Current output   | % | $\leq \pm 0.10$ |

### Long-term drift over 48h at reference temperature

|                |         |       |
|----------------|---------|-------|
| Voltage output | mV      | <1.0  |
| Current output | $\mu$ A | <0.80 |

Technical data

| Type   | -   | F0iS                   | F0eS             | F0iS-HS      | F0eS-HS      |
|--|-----|------------------------|------------------|--------------|--------------|
| Accuracy class   | %   | ≤±0.05                 |                  |              |              |
| Rated torque (Md <sub>n</sub> )                                  | Nm  | 50<br>100<br>200       | 50<br>100<br>200 | 500<br>1,000 | 500<br>1,000 |
|  |     |                        |                  |              |              |
| Nominal sensitivity (range between zero torque and rated torque) |     |                        |                  |              |              |
| Frequency output   | kHz | 20                     |                  |              |              |
| Voltage output   | V   | 5.0 / 10.0 / 2.5 / 5.0 |                  |              |              |
| Current output   | mA  | 8 / 10                 |                  |              |              |
| Output signal at zero torque                                     |     |                        |                  |              |              |
| Frequency output   | kHz | 60                     |                  |              |              |
| Voltage output   | V   | 0.0 / 0.0 / 2.5 / 5.0  |                  |              |              |
| Current output   | mA  | 12 / 10                |                  |              |              |
| Nominal output signal  |     |                        |                  |              |              |
| Frequency output at positive nominal value                       | kHz | 80                     |                  |              |              |
| Frequency output at negative nominal value                       | kHz | 40                     |                  |              |              |
| Voltage output at positive nominal value                         | V   | 5 / 10 / 5 / 10        |                  |              |              |
| Voltage output at negative nominal value                         | V   | -5 / -10 / 0 / 0       |                  |              |              |
| Current output at positive nominal value                         | mA  | 20 / 20                |                  |              |              |
| Current output at negative nominal value                         | mA  | 4 / 0                  |                  |              |              |
| Max. modulation range  |     |                        |                  |              |              |
| Frequency output   | kHz | 30...90                |                  |              |              |
| Voltage output   | V   | -10.5...10.5           |                  |              |              |
| Current output   | mA  | 0...24                 |                  |              |              |
| Group delay time (main TCU)                                      |     |                        |                  |              |              |
| Frequency output   | µs  | 10                     |                  |              |              |
| Voltage output   | µs  | 3,000                  |                  |              |              |
| CAN bus  | µs  | 1,000                  |                  |              |              |

Technical data

| Type                            | -  | F0iS             | F0eS             | F0iS-HS      | F0eS-HS      |
|---------------------------------|----|------------------|------------------|--------------|--------------|
| Accuracy class                  | %  | ≤±0.05           |                  |              |              |
| Rated torque (M <sub>dN</sub> ) | Nm | 50<br>100<br>200 | 50<br>100<br>200 | 500<br>1,000 | 500<br>1,000 |

|  |      |                            |        |        |        |
|--|------|----------------------------|--------|--------|--------|
| Speed measuring system                       |      | Inductive (track at rotor) |        |        |        |
| Pulse per rev (PPR)                          | ppr. | 30                         |        |        |        |
| Maximum speeds (related to PPR)              | rpm  | 25,000                     | 25,000 | 30,000 | 30,000 |
| Max. output frequency (RS422)                | kHz  | 13                         | 13     | 15     | 15     |
| Minimum speed for sufficient pulse stability | rpm  | >10.0                      |        |        |        |

|  |      |  |  |  |  |
|--|------|--|--|--|--|
| Speed measuring system                                   |      | Magneto resistive (2 tracks approx. 90 degree phase shifted) |  |  |  |
| Pulses per rev (PPR)                                     | ppr. | N/A  |  |  |  |
| Maximum speeds (related to PPR)                          | rpm  | N/A  |  |  |  |
| Max. output frequency (RS422)                            | kHz  | N/A  |  |  |  |
| Minimum speed for sufficient pulse stability             | rpm  | N/A  |  |  |  |
| Nominal clearance (sensor - pole ring)                   | mm   | N/A  |  |  |  |
| Working airgap (sensor - pole ring)                      | mm   | N/A  |  |  |  |
| Nominal axial displacement (rotor - stator) #8           | mm   | N/A  |  |  |  |
| Tolerance to nominal axial displacement (rotor - stator) | mm   | N/A  |  |  |  |

|  |      |                          |  |  |  |
|--|------|--------------------------|--|--|--|
| Speed measuring system                                   |      | Optical                  |  |  |  |
| Pulses per rev (PPR)                                     | ppr. | 240 / 360 / 400          |  |  |  |
| Maximum speeds (related to PPR)                          | rpm  | 20,000 / 16,000 / 15,000 |  |  |  |
| Max. output frequency (RS422)                            | kHz  | 80 / 96 / 100            |  |  |  |
| Minimum speed for sufficient pulse stability             | rpm  | >1.3 / >0.8 / >0.8       |  |  |  |
| Nominal radial displacement (rotor - stator)             | mm   | 1.5                      |  |  |  |
| Tolerated radial displacement (rotor - stator) #8        | mm   | 1.4...1.6                |  |  |  |
| Nominal axial displacement (rotor - stator) #8           | mm   | 4.0                      |  |  |  |
| Tolerance to nominal axial displacement (rotor - stator) | mm   | +0.5/-0.3                |  |  |  |

Technical data

| Type                            | -  | F0iS             | F0eS             | F0iS-HS      | F0eS-HS      |
|---------------------------------|----|------------------|------------------|--------------|--------------|
| Accuracy class                  | %  | ≤±0.05           |                  |              |              |
| Rated torque (Md <sub>n</sub> ) | Nm | 50<br>100<br>200 | 50<br>100<br>200 | 500<br>1,000 | 500<br>1,000 |

| Angular measuring system |      |     |  |  |  |
|--------------------------|------|-----|--|--|--|
| Requirement              | -    | N/A |  |  |  |
| Pulses per rev           | ppr. | N/A |  |  |  |
| Resolution               | °    | N/A |  |  |  |
| Output signals           | -    | N/A |  |  |  |
| Measurement ranges       | °    | N/A |  |  |  |

Technical data

| Type                            | -  | F0iS             | F0eS             | F0iS-HS      | F0eS-HS      |
|---------------------------------|----|------------------|------------------|--------------|--------------|
| Accuracy class                  | %  | ≤±0.05           |                  |              |              |
| Rated torque (Md <sub>n</sub> ) | Nm | 50<br>100<br>200 | 50<br>100<br>200 | 500<br>1,000 | 500<br>1,000 |

| Temperature ranges                       |    |          |          |          |          |
|--|----|----------|----------|----------|----------|
| Nominal temperature range (Rotor)        | °C | 0...80   |          |          |          |
| Operating temperature range (Rotor) #9   | °C | -20...85 |          |          |          |
| Storage temperature range (Rotor)        | °C | -30...85 |          |          |          |
| Nominal temperature range (Stator)       | °C | 0...70   | 0...80   | 0...70   | 0...80   |
| Operating temperature range (Stator) #10 | °C | -20...70 | -20...85 | -20...70 | -20...85 |
| Storage temperature range (Stator)       | °C | -30...85 |          |          |          |
| Nominal temperature range (TCU)          | °C | N/A      | 0...70   | N/A      | 0...70   |
| Operating temperature range (TCU)        | °C | N/A      | -20...70 | N/A      | -20...70 |
| Storage temperature range (TCU)          | °C | N/A      | -30...85 | N/A      | -30...85 |

| Mechanical shock (EN 60068-2-27) |      |       |  |  |  |
|----------------------------------|------|-------|--|--|--|
| Quantity                         | -    | 1,000 |  |  |  |
| Duration                         | ms   | 3     |  |  |  |
| Acceleration                     | m/s² | 650   |  |  |  |

| Vibration load (EN 60068-2-6) |      |            |  |  |  |
|-------------------------------|------|------------|--|--|--|
| Frequency                     | Hz   | 10...2,000 |  |  |  |
| Duration                      | min. | 150        |  |  |  |
| Acceleration                  | m/s² | 200        |  |  |  |

| Load limits #11                                     |    |                            |                            |                      |                      |
|---|----|----------------------------|----------------------------|----------------------|----------------------|
| Limit torque, related to Md <sub>n</sub>            | %  | 500                        | 500                        | 250<br>175           | 250<br>175           |
| Breaking torque approx., related to Md <sub>n</sub> | %  | 1,000                      | 1,000                      | 500<br>350           | 500<br>350           |
| Axial limit force                                   | kN | 6.00<br>7.60<br>12.40      | 6.00<br>7.60<br>12.40      | 16.50<br>28.50       | 16.50<br>28.50       |
| Lateral limit force                                 | N  | 211.00<br>298.00<br>617.00 | 211.00<br>298.00<br>617.00 | 1,390.00<br>2,980.00 | 1,390.00<br>2,980.00 |
| Bending limit torque                                | Nm | 7.90<br>12.50<br>24.40     | 7.90<br>12.50<br>24.40     | 61.00<br>123.00      | 61.00<br>123.00      |

Technical data

| Type                            | -  | F0iS             | F0eS             | F0iS-HS      | F0eS-HS      |
|---------------------------------|----|------------------|------------------|--------------|--------------|
| Accuracy class                  | %  | ≤±0.05           |                  |              |              |
| Rated torque (Md <sub>n</sub> ) | Nm | 50<br>100<br>200 | 50<br>100<br>200 | 500<br>1,000 | 500<br>1,000 |

| Mechanical values   |         |                                     |                         |                |                |
|---|---------|-------------------------------------|-------------------------|----------------|----------------|
| Torsional stiffness   | kNm/rad | 23<br>36<br>84                      | 23<br>36<br>84          | 190<br>356     | 190<br>356     |
| Angle of twist at Md <sub>n</sub>                           | °       | 0.120<br>0.160<br>0.140             | 0.120<br>0.160<br>0.140 | 0.150<br>0.161 | 0.150<br>0.161 |
| Axial stiffness   | kN/mm   | 202<br>253<br>414                   | 202<br>253<br>414       | 675<br>1,147   | 675<br>1,147   |
| Radial stiffness  | kN/mm   | 13<br>18<br>38                      | 13<br>18<br>38          | 81<br>175      | 81<br>175      |
| Bending stiffness   | kNm/°   | 0.30<br>0.45<br>0.90                | 0.30<br>0.45<br>0.90    | 2.10<br>4.20   | 2.10<br>4.20   |
| Deflection at axial limit force                             | mm      | <0.04                               | <0.04                   | <0.03          | <0.03          |
| Additional radial deviation at lateral limit force          | mm      | <0.02                               |                         |                |                |
| Parallel deviation at bending limit torque                  | mm      | <0.05                               |                         |                |                |
| Inherent frequency  | Hz      | 600<br>750<br>1,000                 | 600<br>750<br>1,000     | 1,700<br>2,400 | 1,700<br>2,400 |
| Balance quality-level (DIN ISO 1949)                        | -       | G2.5                                |                         |                |                |
| Inertia of rotor  | kgm²    | 0.0012                              | 0.0012                  | 0.0013         | 0.0013         |
| Max. limits for relative shaft vibration (peak to peak) #12 | µm      | $S_{(p-p)} = \frac{9000}{\sqrt{n}}$ |                         |                |                |



## Technical data

| Type                            | -  | F0iS             | F0eS             | F0iS-HS      | F0eS-HS      |
|---------------------------------|----|------------------|------------------|--------------|--------------|
| Accuracy class                  | %  | ≤±0.05           |                  |              |              |
| Rated torque (M <sub>dN</sub> ) | Nm | 50<br>100<br>200 | 50<br>100<br>200 | 500<br>1,000 | 500<br>1,000 |

### Weight approx.

|   |    |                   |                   |            |            |
|---|----|-------------------|-------------------|------------|------------|
| Rotor <u>#13</u>                          | kg | 1.2<br>1.2<br>1.3 | 1.2<br>1.2<br>1.3 | 1.2<br>1.3 | 1.2<br>1.3 |
| Stator (without speed encoder) <u>#13</u> | kg | 2.10              | 1.10              | 2.10       | 1.10       |

### Mounting distances (without optional speed detection system)

|   |    |       |
|---|----|-------|
| Nominal radial displacement (rotor - stator)              | mm | 2.1   |
| Tolerance to nominal radial displacement (rotor - stator) | mm | ≤±0.1 |
| Nominal axial displacement (rotor - stator) <u>#8</u>     | mm | 4     |
| Tolerance to nominal axial displacement (rotor - stator)  | mm | ≤±0.5 |

### Flatness and concentricity tolerances rotor

|  |    |      |
|--|----|------|
| Circular run-out-axial tolerance <u>#14</u>  | mm | 0.01 |
| Circular run-out-radial tolerance <u>#14</u> | mm | 0.01 |

### Power supply

|  |   |              |
|--|---|--------------|
| Nominal supply                             | V | (DC) 24      |
| Supply range <u>#15</u>                    | V | (DC) 23...25 |
| Max. current consumption in measuring mode | A | <0.70        |
| Max. current consumption in start-up mode  | A | <2           |
| Nominal power consumption                  | W | <17          |

### Load resistance

|                  |      |       |
|------------------|------|-------|
| Frequency output | -    | RS422 |
| Voltage output   | kOhm | ≥5    |

### Dynamic

|                              |     |        |
|------------------------------|-----|--------|
| Frequency output             | kHz | ≤7     |
| Voltage output               | kHz | ≤1     |
| Current output               | kHz | ≤1     |
| CAN output conversation rate | 1/s | ≤1,000 |

Technical data

| Type                                | -  | F0iS              | F0eS              | F0iS-HS           | F0eS-HS           |
|-------------------------------------|----|-------------------|-------------------|-------------------|-------------------|
| Accuracy class                      | %  | ≤±0.05            |                   |                   |                   |
| Rated torque (Mdn)                  | Nm | 50<br>100<br>200  | 50<br>100<br>200  | 500<br>1,000      | 500<br>1,000      |
| Miscellaneous                       |    |                   |                   |                   |                   |
| Protection class (Rotor)            | -  | IP54              |                   |                   |                   |
| Protection class (Stator)           | -  | IP54              |                   |                   |                   |
| Protection class (rotor, extended)  | -  | N/A               |                   |                   |                   |
| Protection class (stator, extended) | -  | On request        |                   |                   |                   |
| Pitch circle screw information      | -  | 8 * M10<br>(10.9) | 8 * M10<br>(10.9) | 8 * M10<br>(12.9) | 8 * M10<br>(12.9) |
| CAN bus type                        | -  | 2B                |                   |                   |                   |
| Configuration interface             | -  | RS232             |                   |                   |                   |
| Central hole                        | mm | N/A               |                   |                   |                   |
| Material                            | -  | Steel             |                   |                   |                   |
| Measuring range (related to Mdn)    | %  | 120               |                   |                   |                   |
| Compatible evaluation units (TCU)   | -  | Integrated        | TCU2              | Integrated        | TCU2              |
| Stator type                         | -  | iS                | eS                | iS                | eS                |
| Sales information                   |    |                   |                   |                   |                   |
| Article number                      | -  | 10000182          | 10000338          | 10001557          | 10006259          |
| U.S. FCC certificate                | -  | Not required      |                   |                   |                   |

## Remarks and information

| Link no. | Topic                      | Remark   |
|----------|----------------------------|--|
| #1       | Nominal torque             | Based on customer requests, the measurement systems can optionally be optimized for not listed nominal torque values (intermediate ranges possible).   |
| #2       | Second torque range        | <p>The written second nominal torque value (<math>M_{d_{ns}}</math>) is the smallest possible. Greater second torque ranges can be chosen on demand.</p> <p>Mechanical values and load limits vary between single and dual range torque meters. A data sheet for dual range torque meters with specific values can be requested.</p> |
| #3       | Dimensions                 | Mechanical dimensions are without engagement. Use the drawings and step files as master for your constructions.  |
| #4       | Details in the drawings    | Value can vary by optional components. Please find details to this attribute in the integrated drawings.   |
| #5       | Pitch circle diameter      | The pitch circle diameter is identically at input and output side for most systems. More information is given in the drawings of a product.  |
| #6       | Speed detection max speed  | The maximum allowed speed of speed detection systems is depending on the number of pulses per rotation (PPR). High PPRs can reduce the maximum allowed speed. Details are shown within this data sheet in the description of the speed detection system.   |
| #7       | Linearity                  | Values of Linearity deviation incl. Hysteresis can only be reached if positive and negative sensitivity values are used.   |
| #8       | Reference planes           | Please check the drawings for information about the reference planes of this attribute.  |
| #9       | Temperature range (rotor)  | No condensation allowed.   |
| #10      | Temperature range (stator) | No condensation allowed. Temperature related to housing ground point.  |

## Remarks and information

| Link no. | Topic                                 | Remark   |
|----------|---------------------------------------|--|
| #11      | Load limits                           | The given values are only valid if no other load occurs at the same time. If the loads in sum are 100%, the max. error will be 0.3% of the nominal torque. Limit and break torque are lower if other loads are applied (such as lateral forces). |
| #12      | Vibration limits                      | Vibration limits are not an influence to the machine. They reflect the allowed effect onto the rotor (ISO 7919-3). Parameter "n" is given in "r/min."  |
| #13      | Weights                               | Weights are related to components without options like speed detection system. Please contact us for exact weight information of options.  |
| #14      | Flatness and concentricity tolerances | The parameters of "Flatness and concentricity tolerances rotor" are manufacturing tolerances.  |
| #15      | Supply voltage                        | The supply voltage range must be given at measurement system side. Long wires can reduce the voltage level from power supply to measurement system.  |


## Drawing

iS




Rotor & stator with integrated evaluation unit (TCU)  
Rotor & Stator mit integrierter Auswertereinheit (TCU)

eS

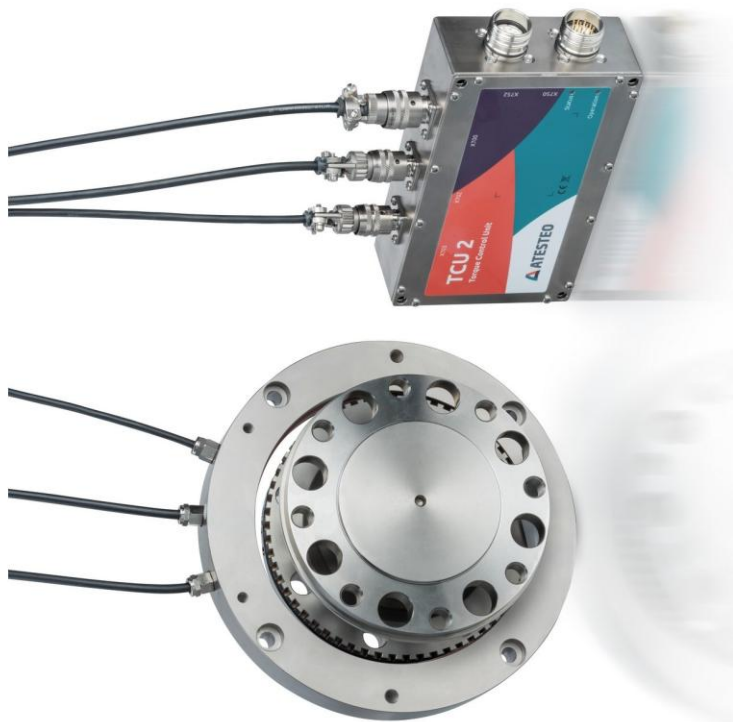


Rotor, ring stator & external evaluation unit (TCU)  
Rotor, Ringstator & abgesetzte Auswertereinheit (TCU)

Drawing

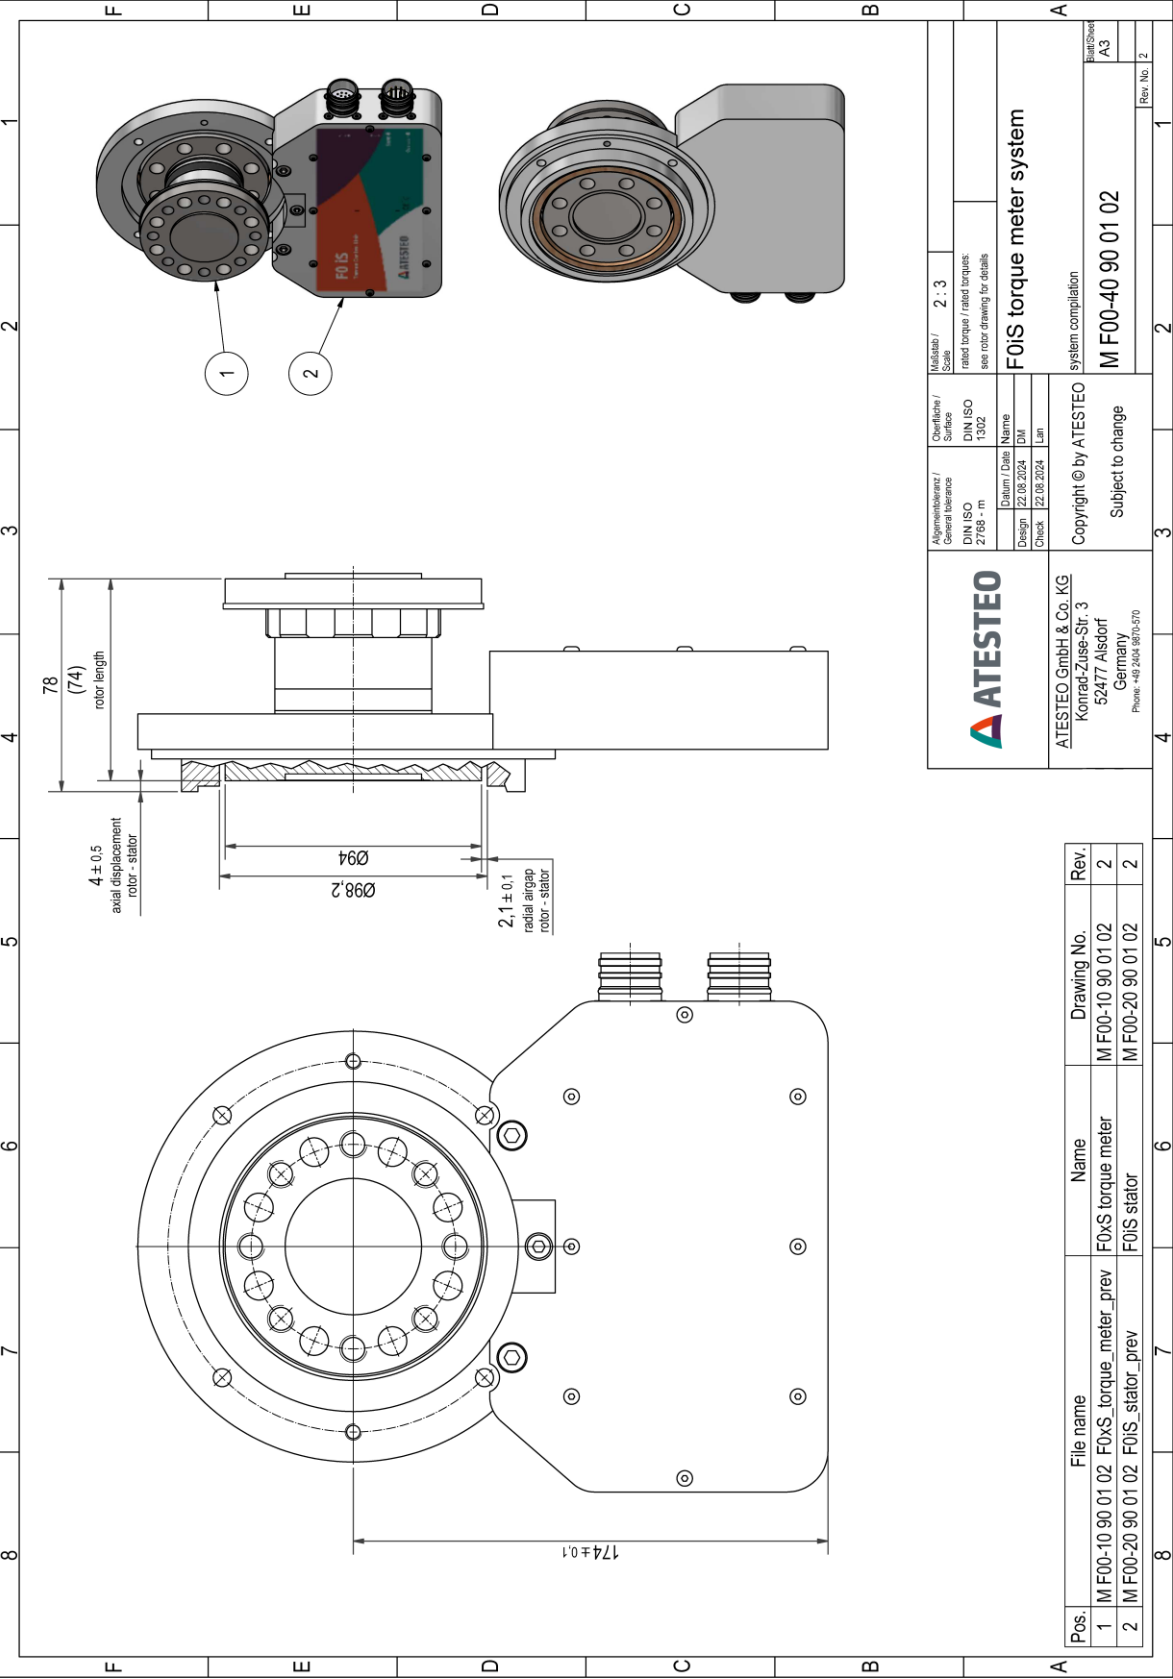


Drawing

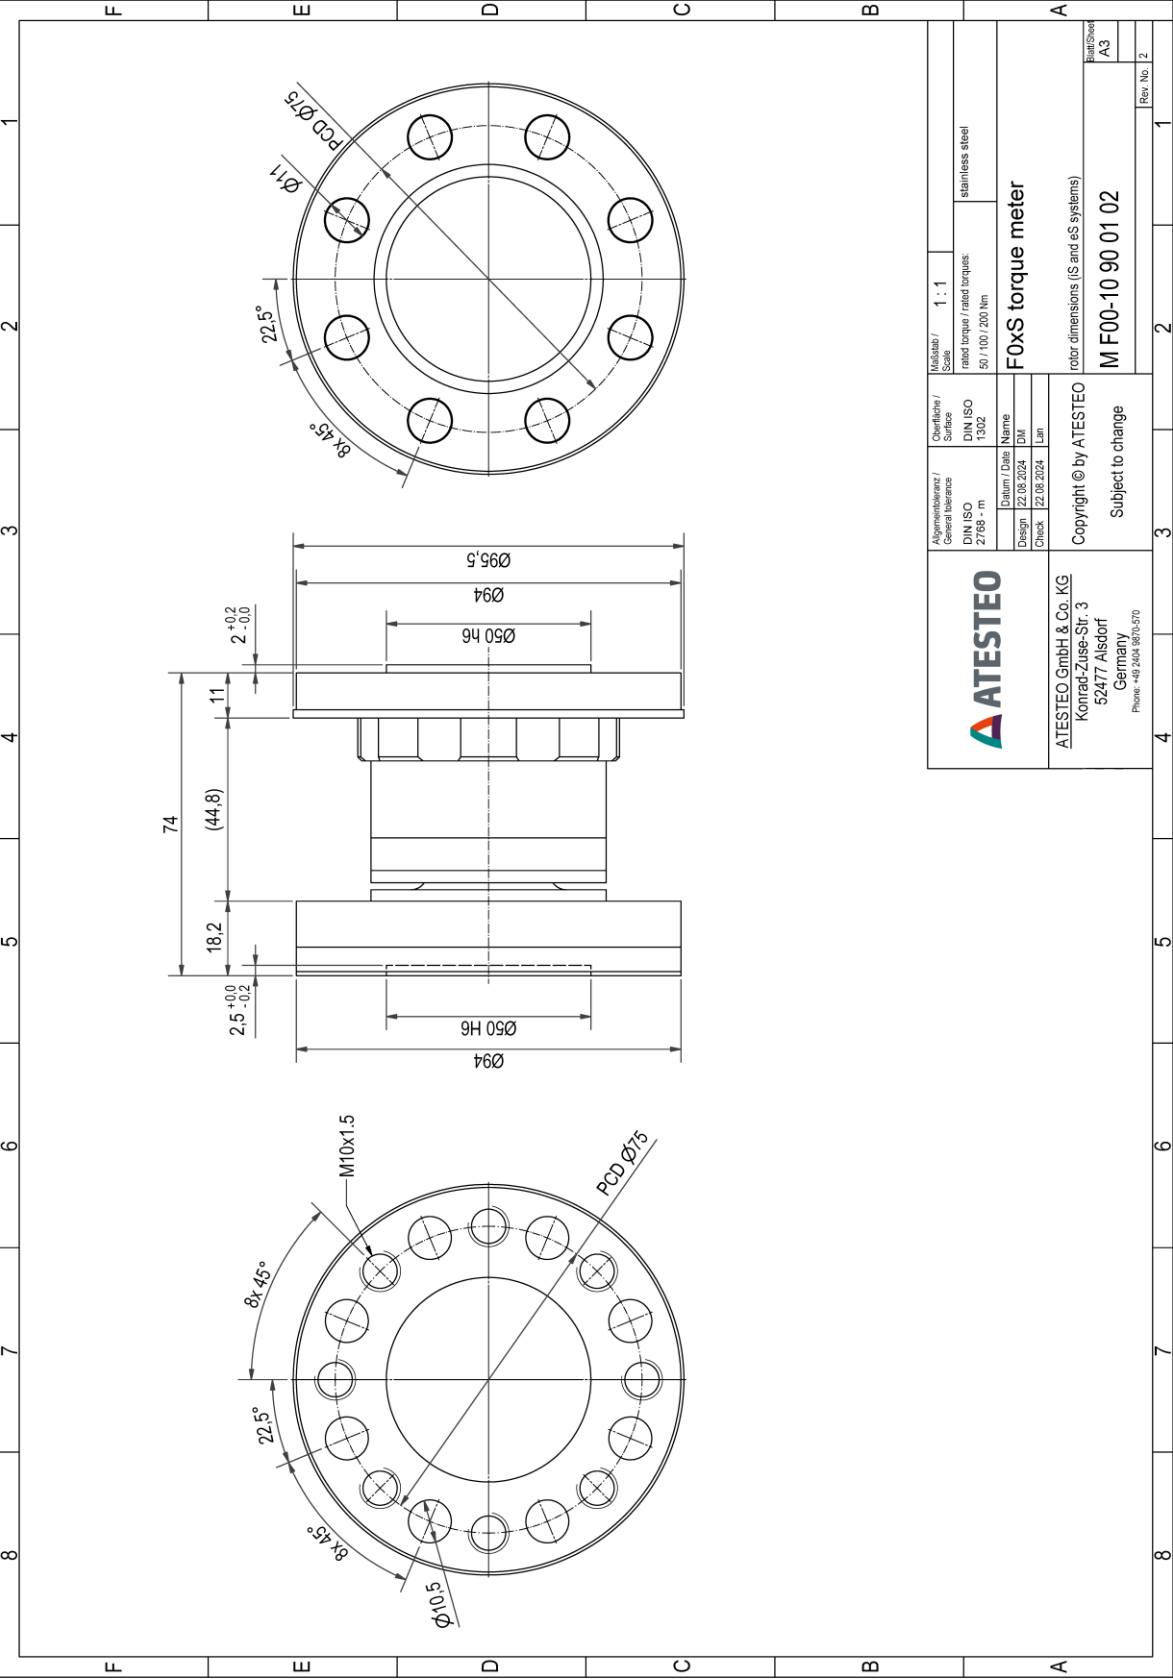






## Drawing

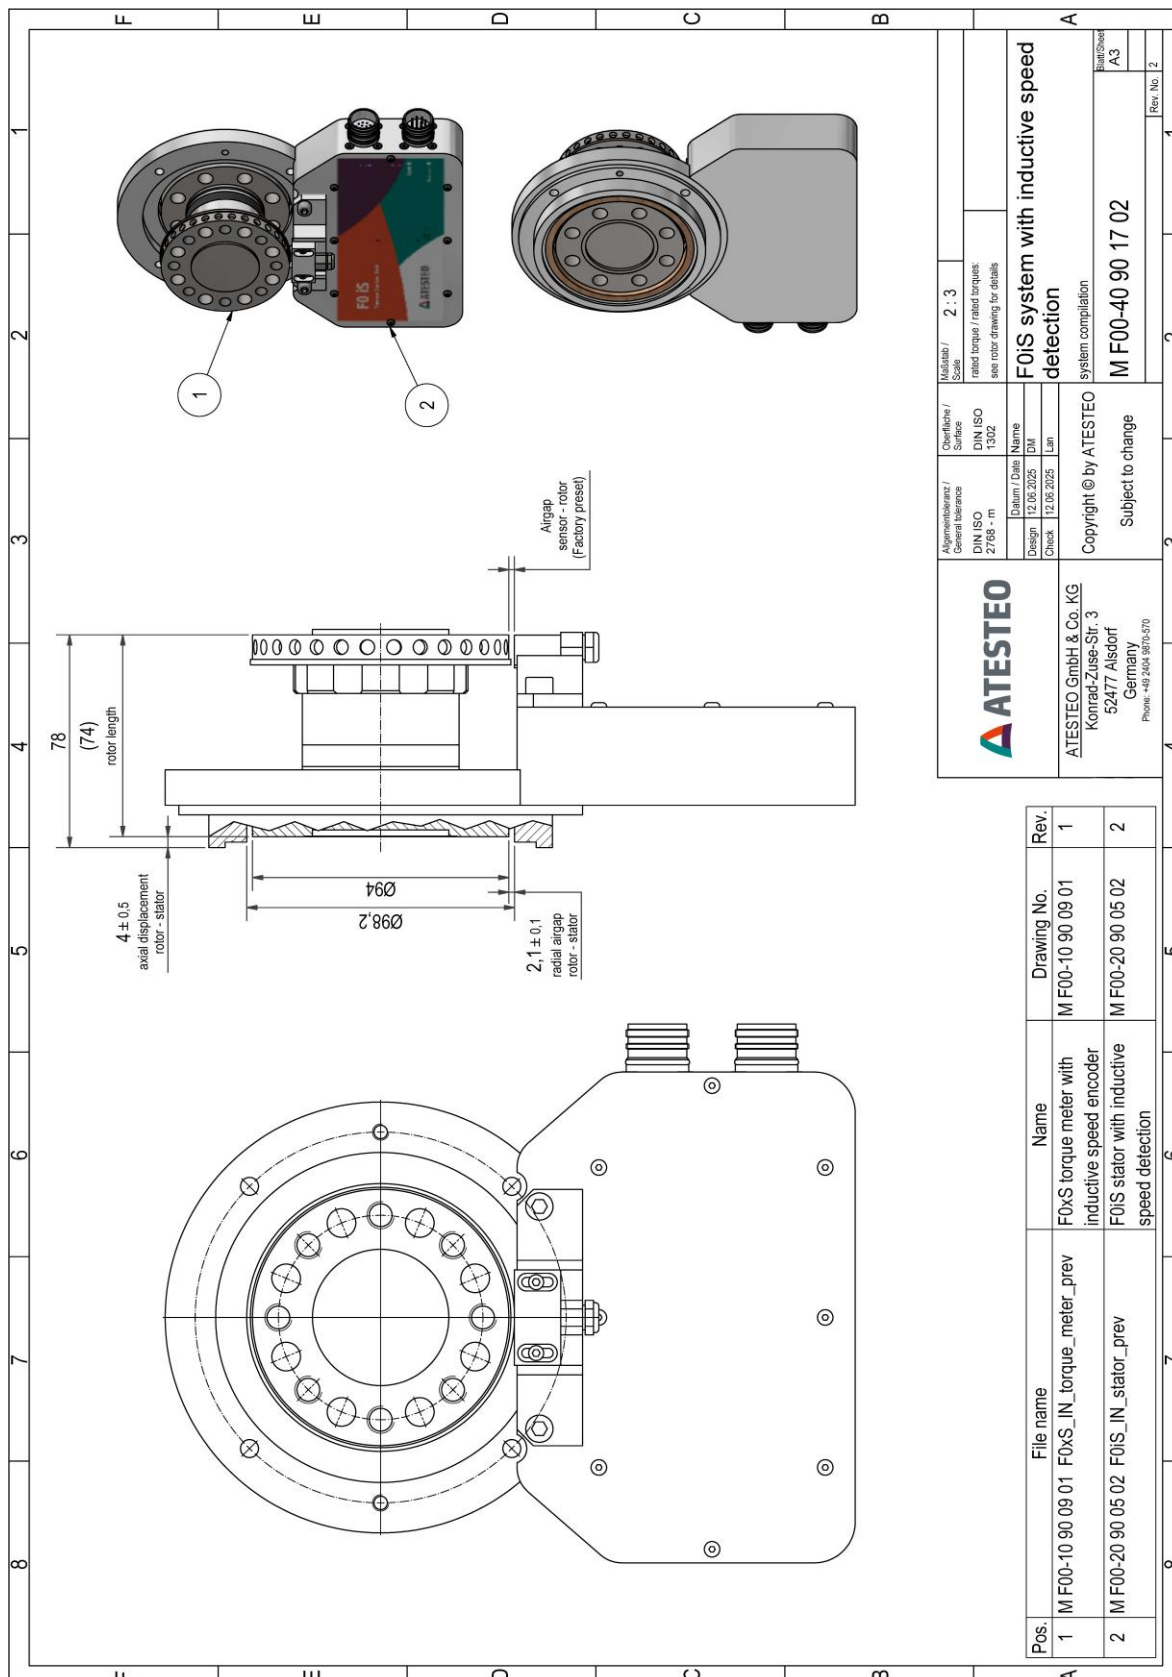

©2025, ATESTEO GmbH & Co. KG, This product data sheet was created on 06.17.2025.

The information contained in the product data sheet corresponds to the status quo at the time the document was created. ATESTEO continually further develops its products and reserves the right to make changes to the technical data. ATESTEO does not accept any liability for consequential losses arising from the use of this product data sheet or the information contained therein.


## Drawing

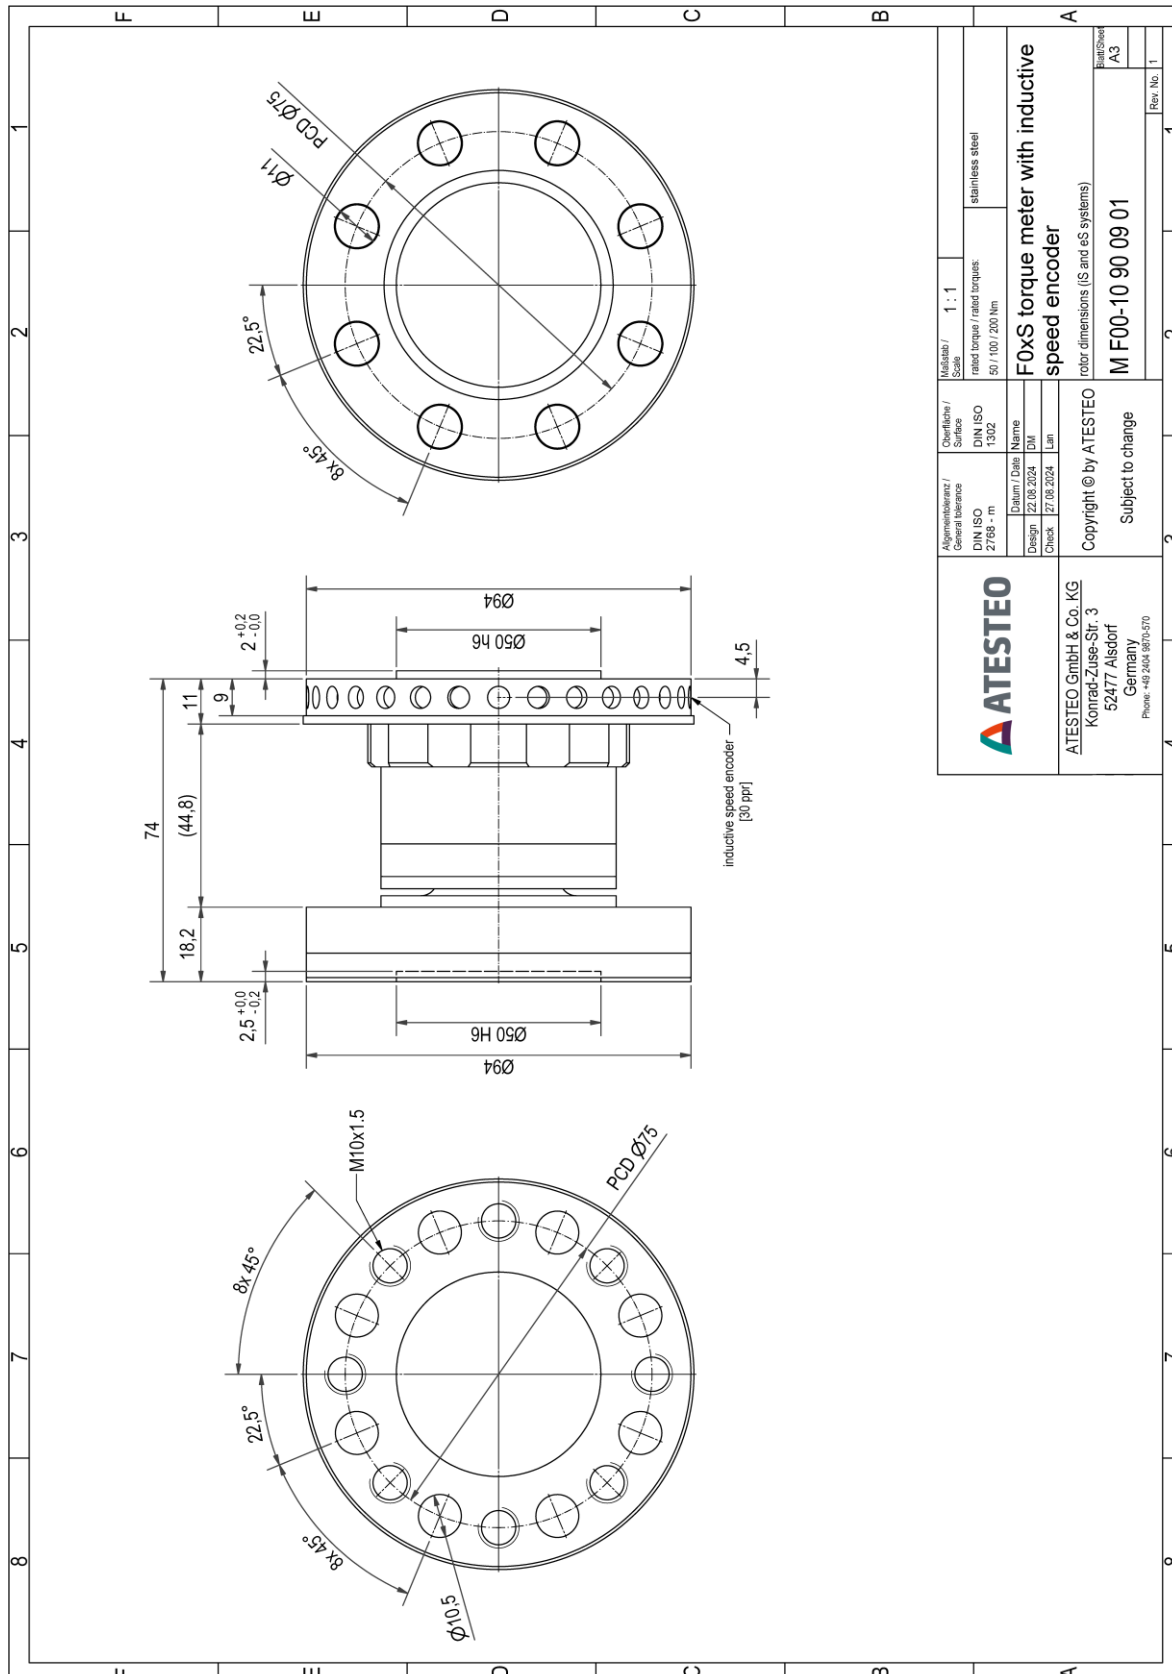


©2025, ATESTEO GmbH & Co. KG, This product data sheet was created on 06.17.2025.

The information contained in the product data sheet corresponds to the status quo at the time the document was created. ATESTEO continually further develops its products and reserves the right to make changes to the technical data. ATESTEO does not accept any liability for consequential losses arising from the use of this product data sheet or the information contained therein.


Drawing

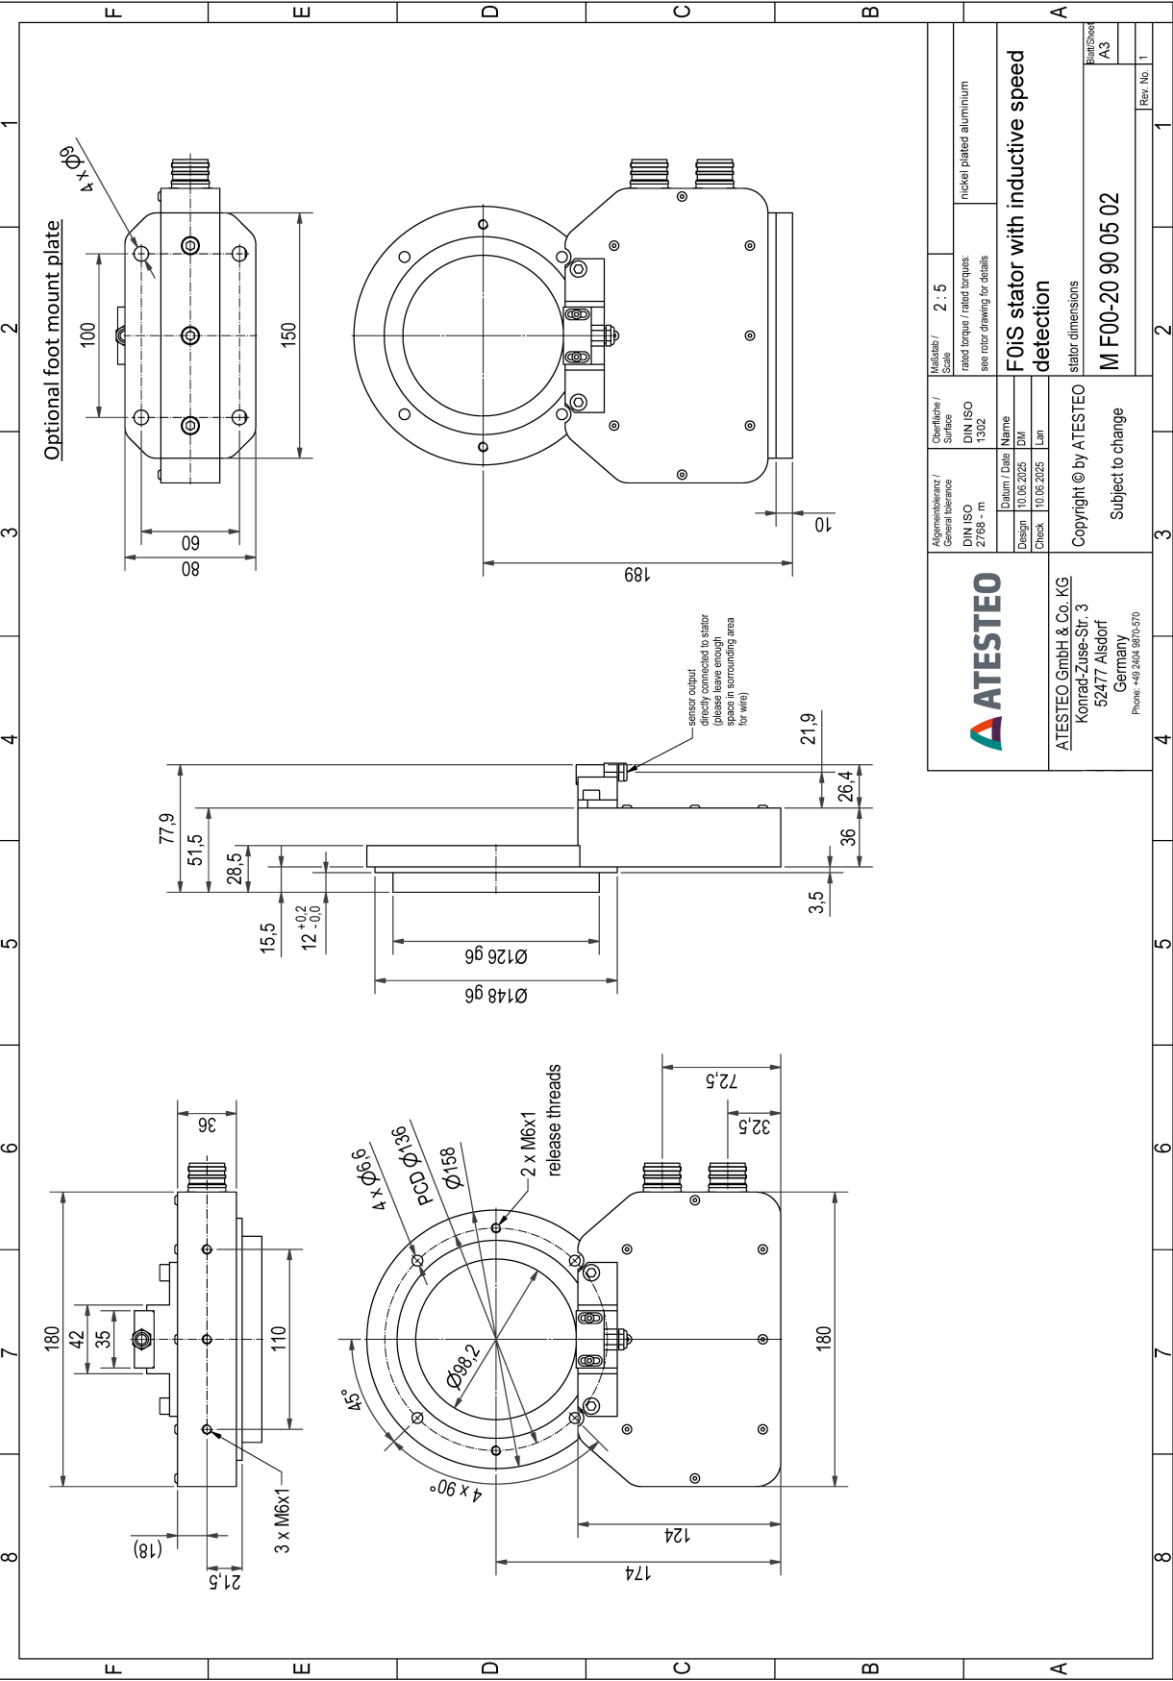


Drawing

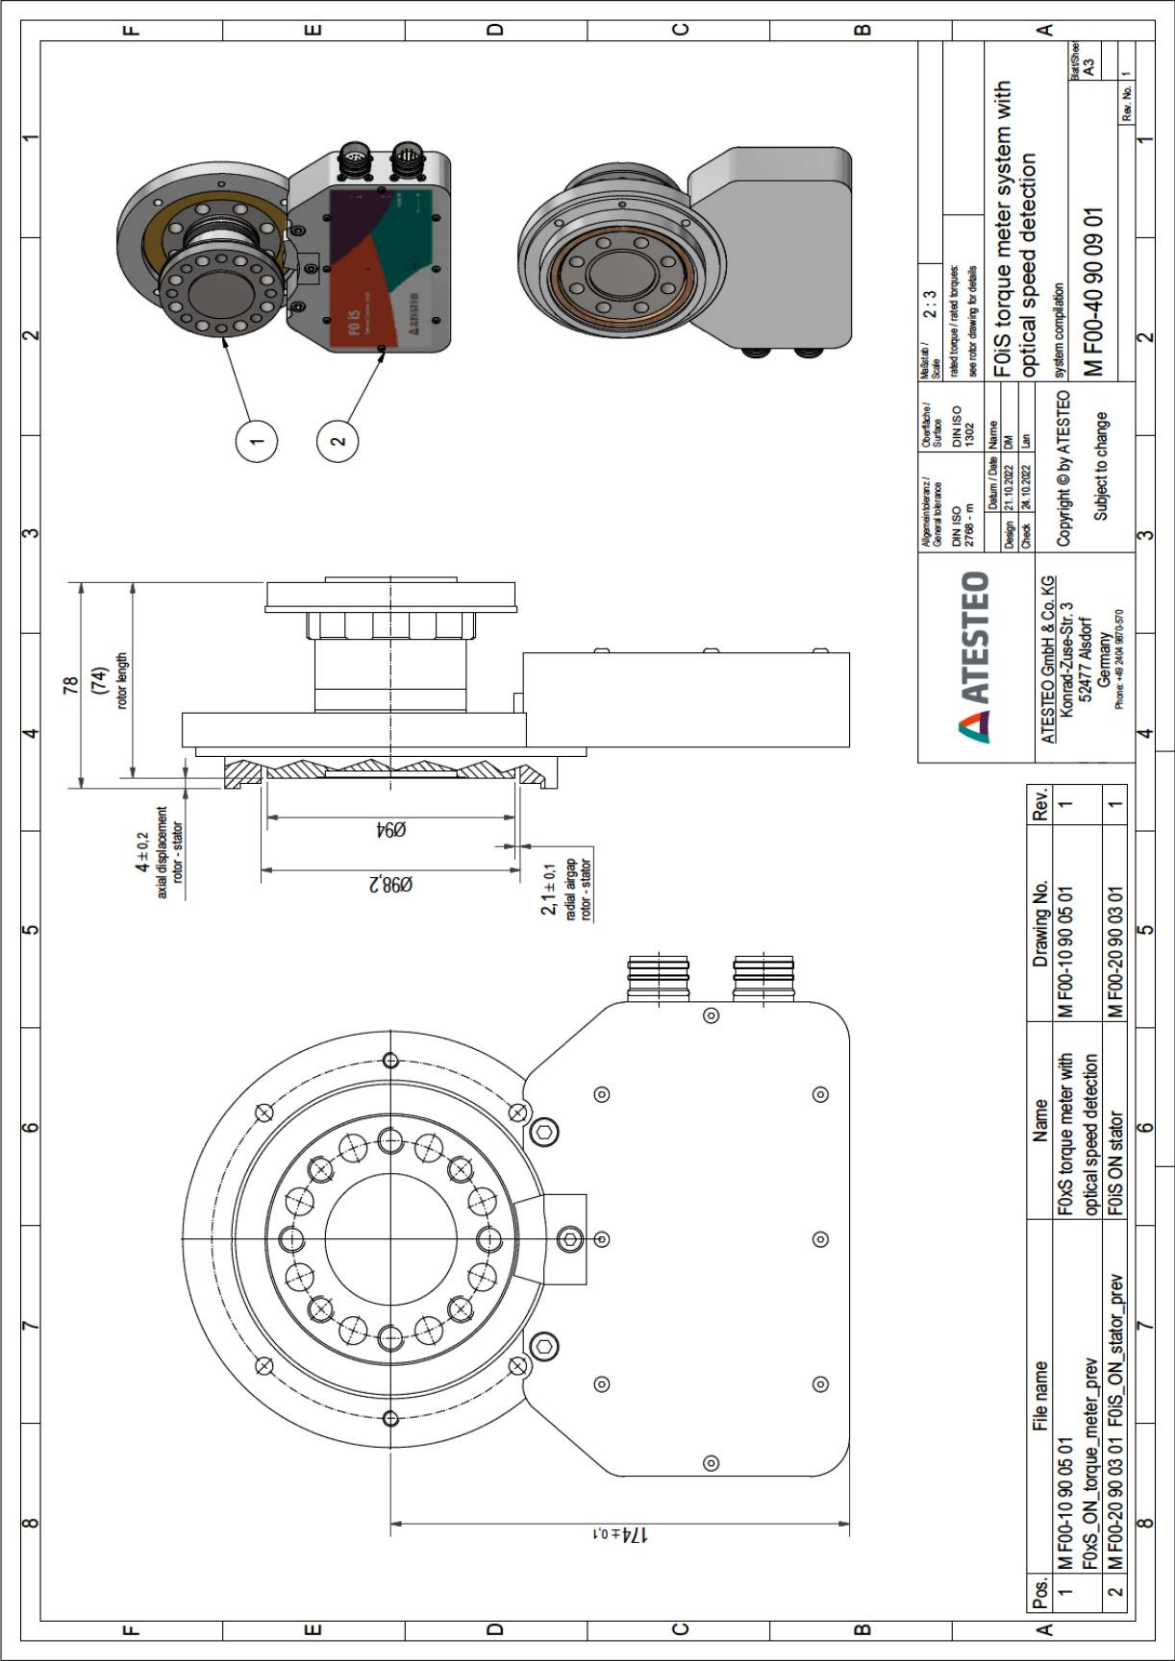

Drawing

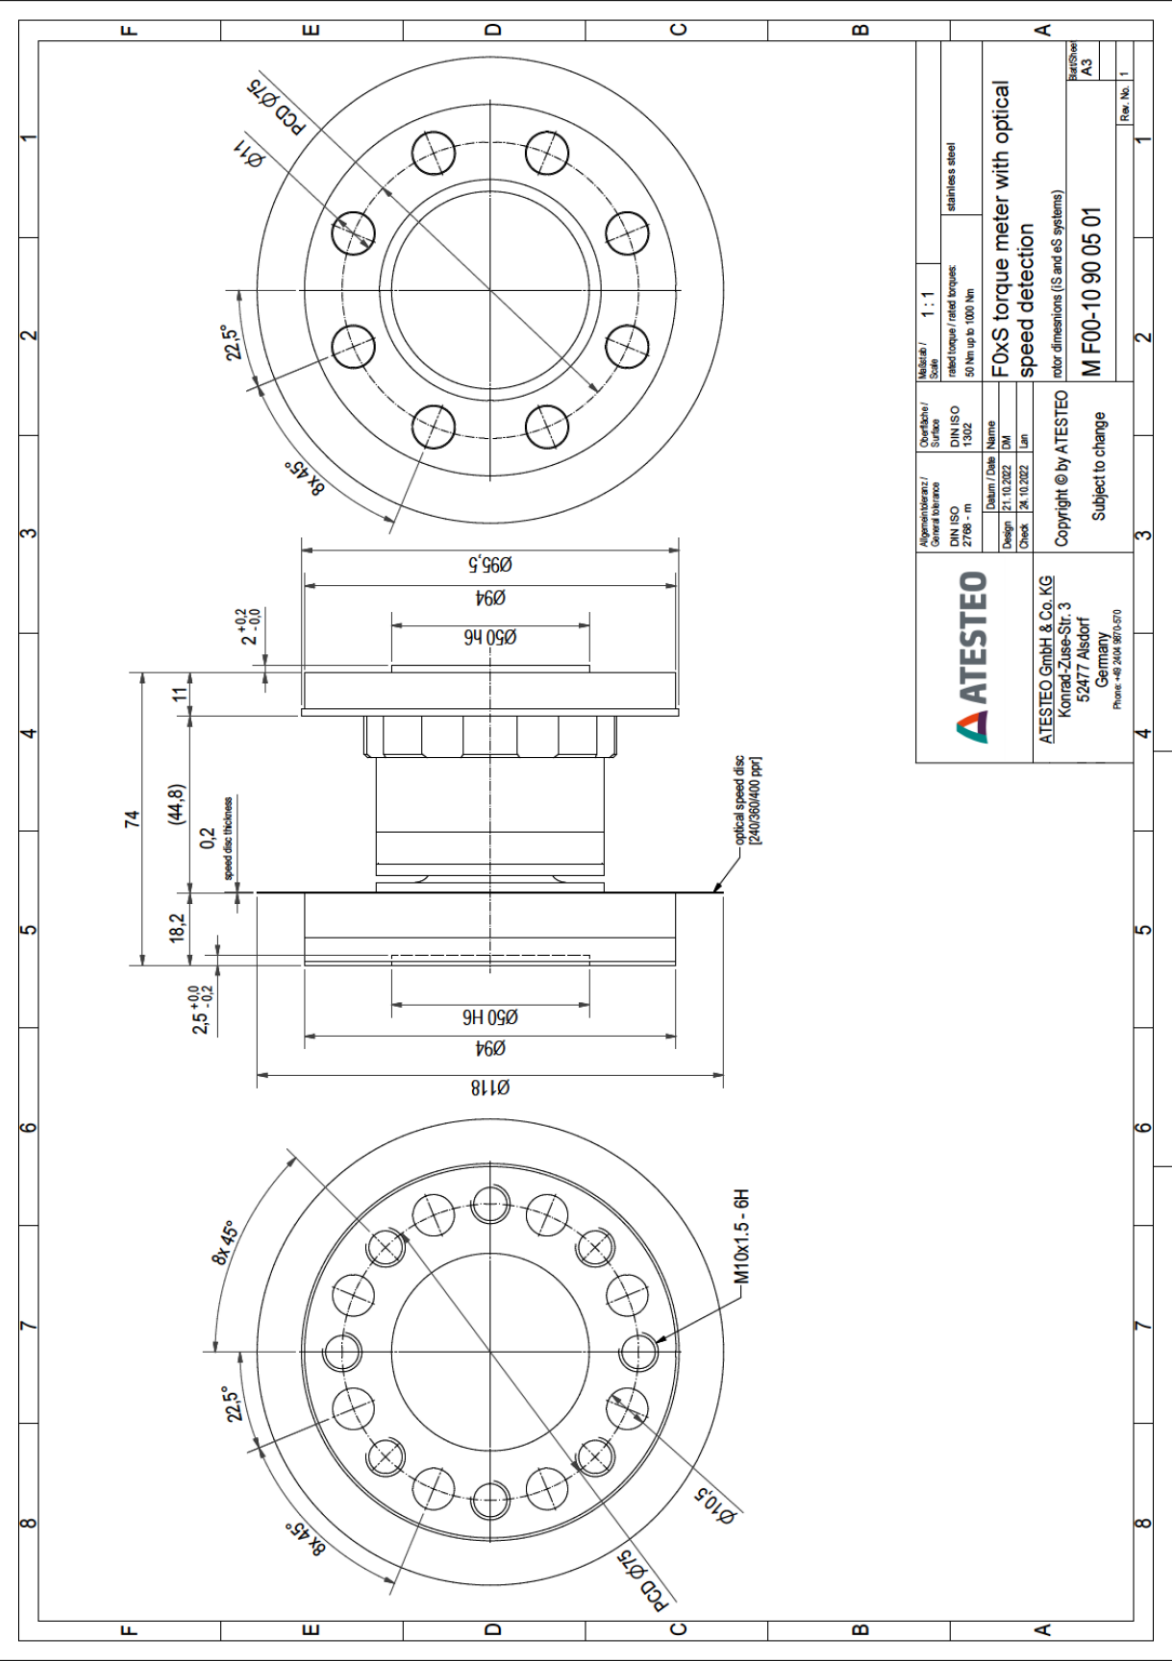


## Drawing

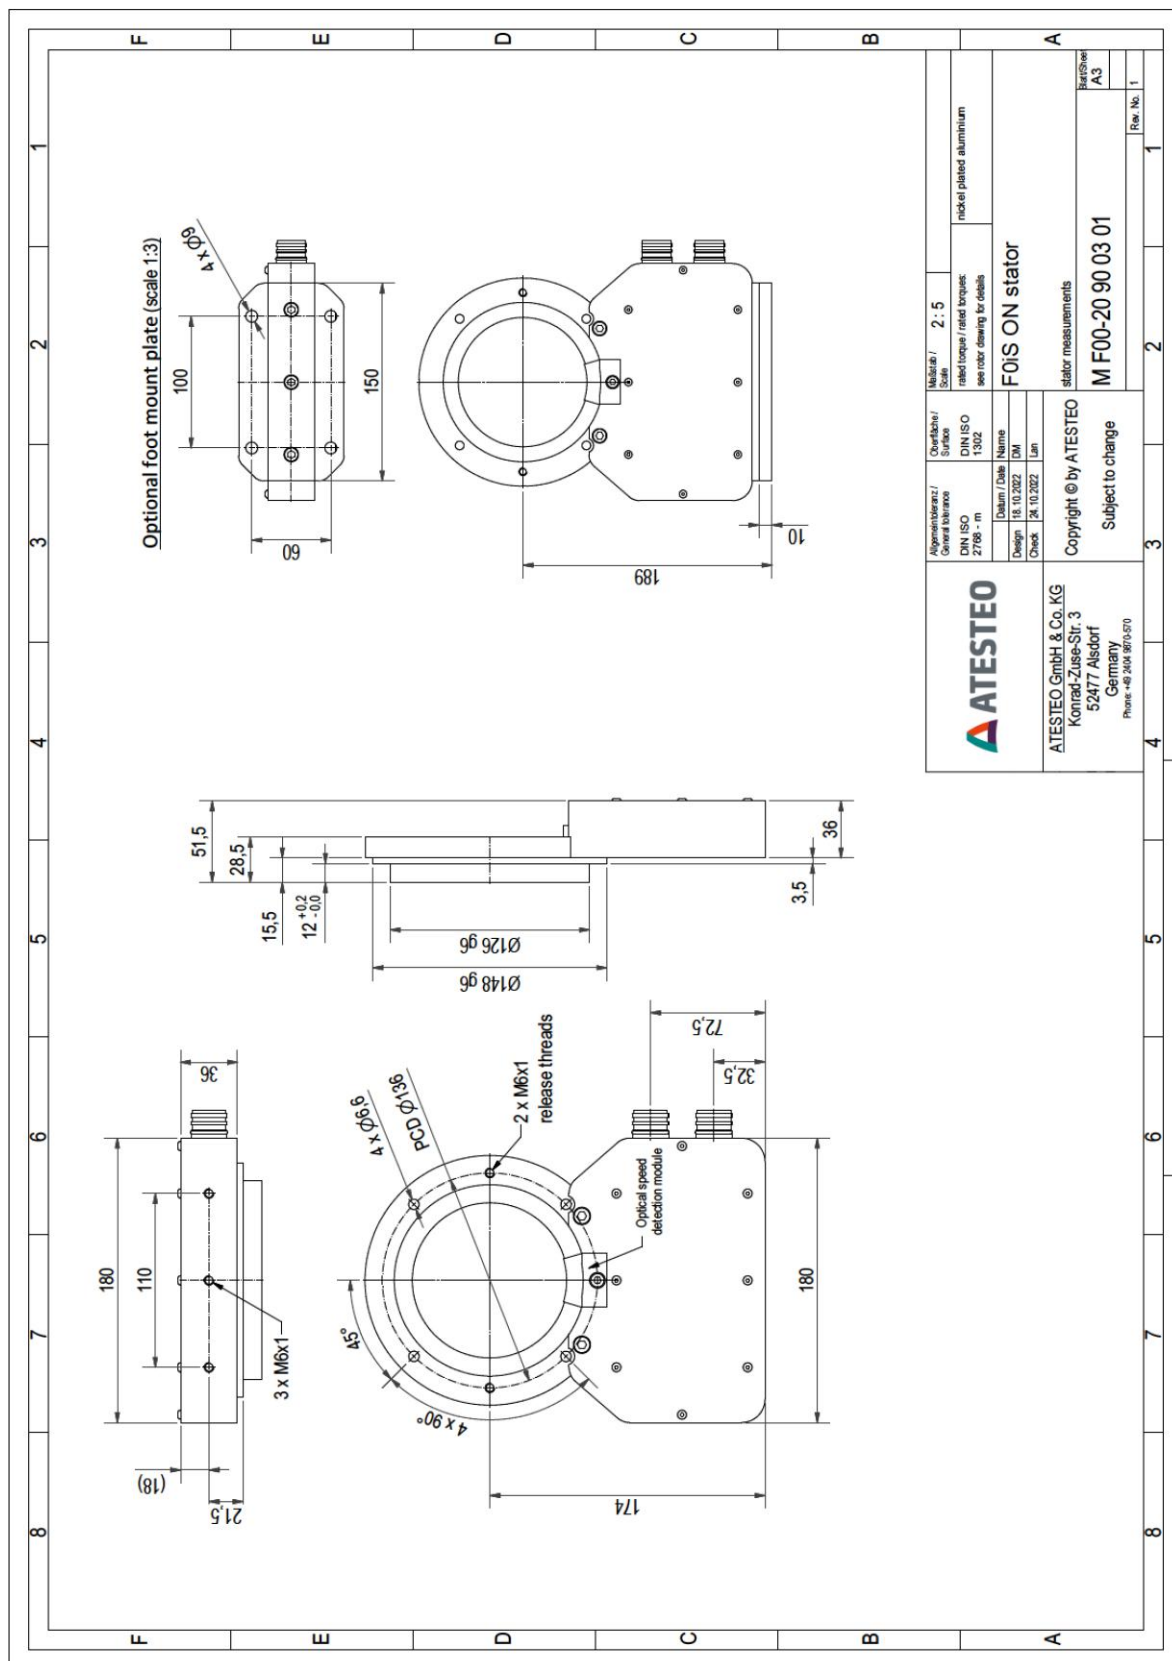

©2025, ATESTEO GmbH & Co. KG, This product data sheet was created on 06.17.2025.


The information contained in the product data sheet corresponds to the status quo at the time the document was created. ATESTEO continually further develops its products and reserves the right to make changes to the technical data. ATESTEO does not accept any liability for consequential losses arising from the use of this product data sheet or the information contained therein.

Drawing

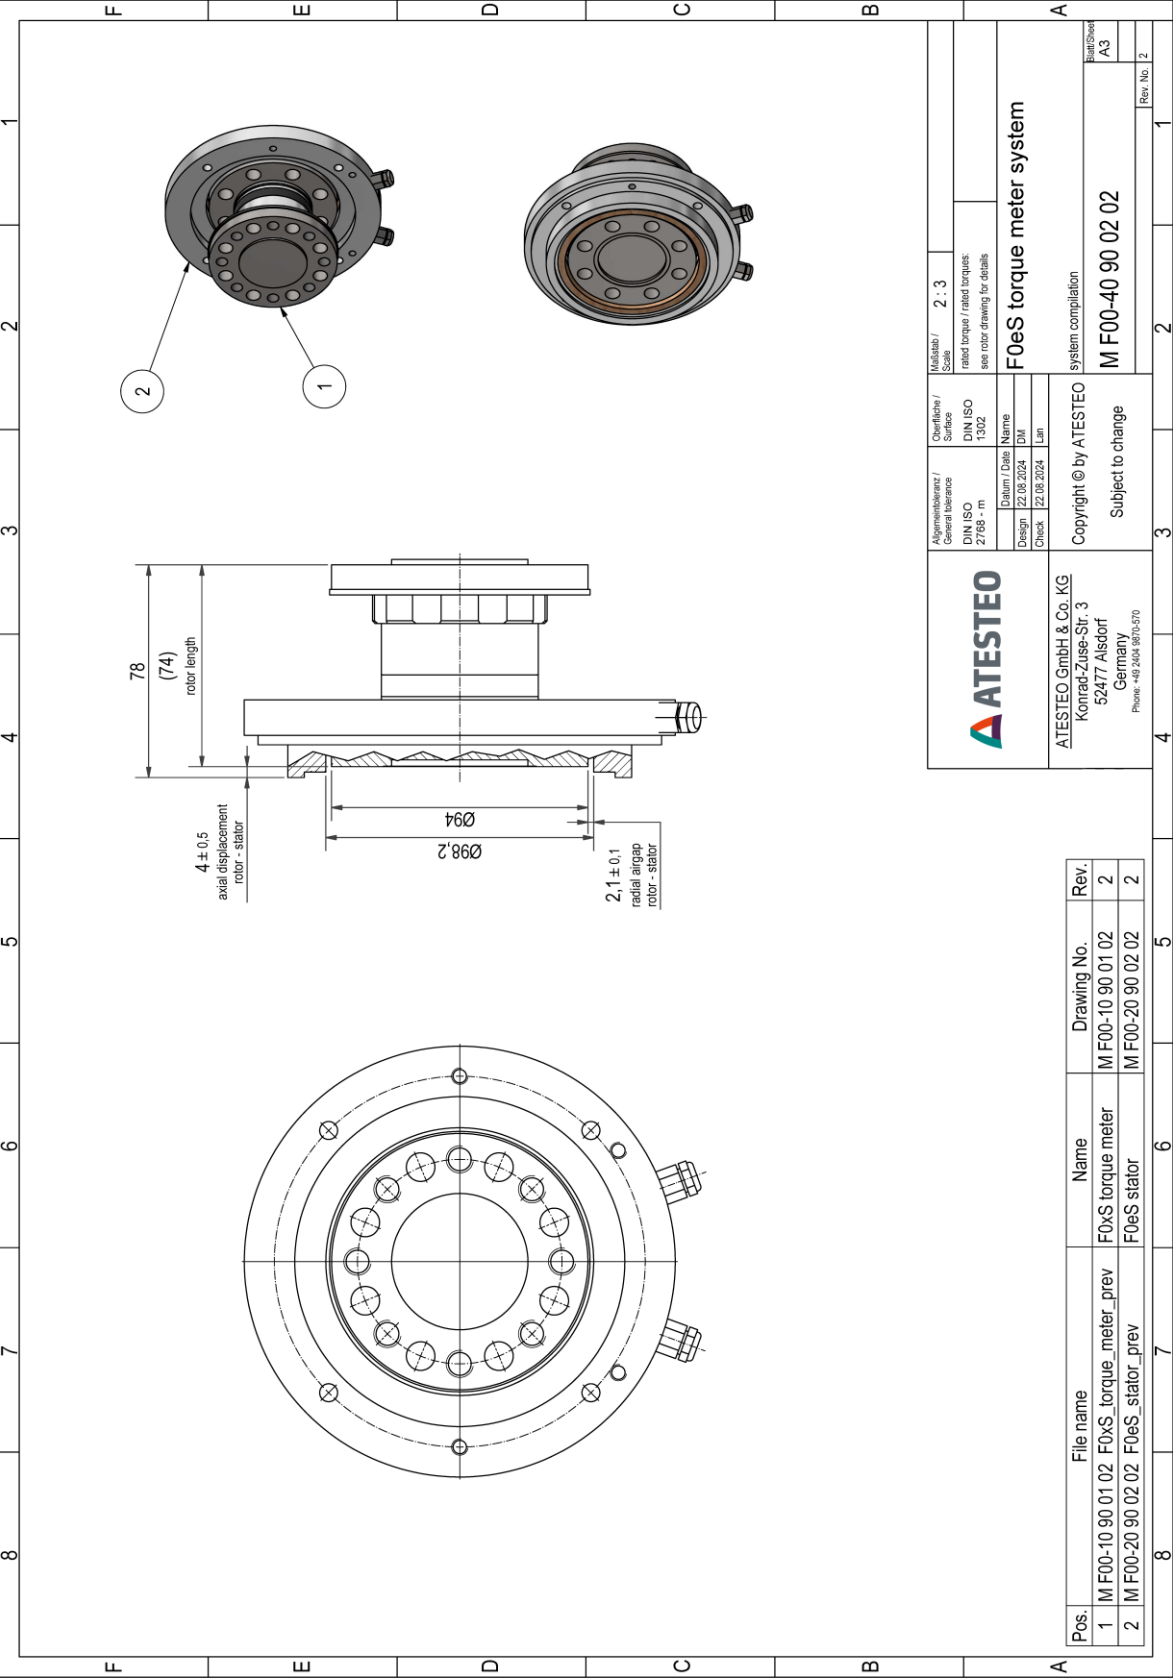



## Drawing

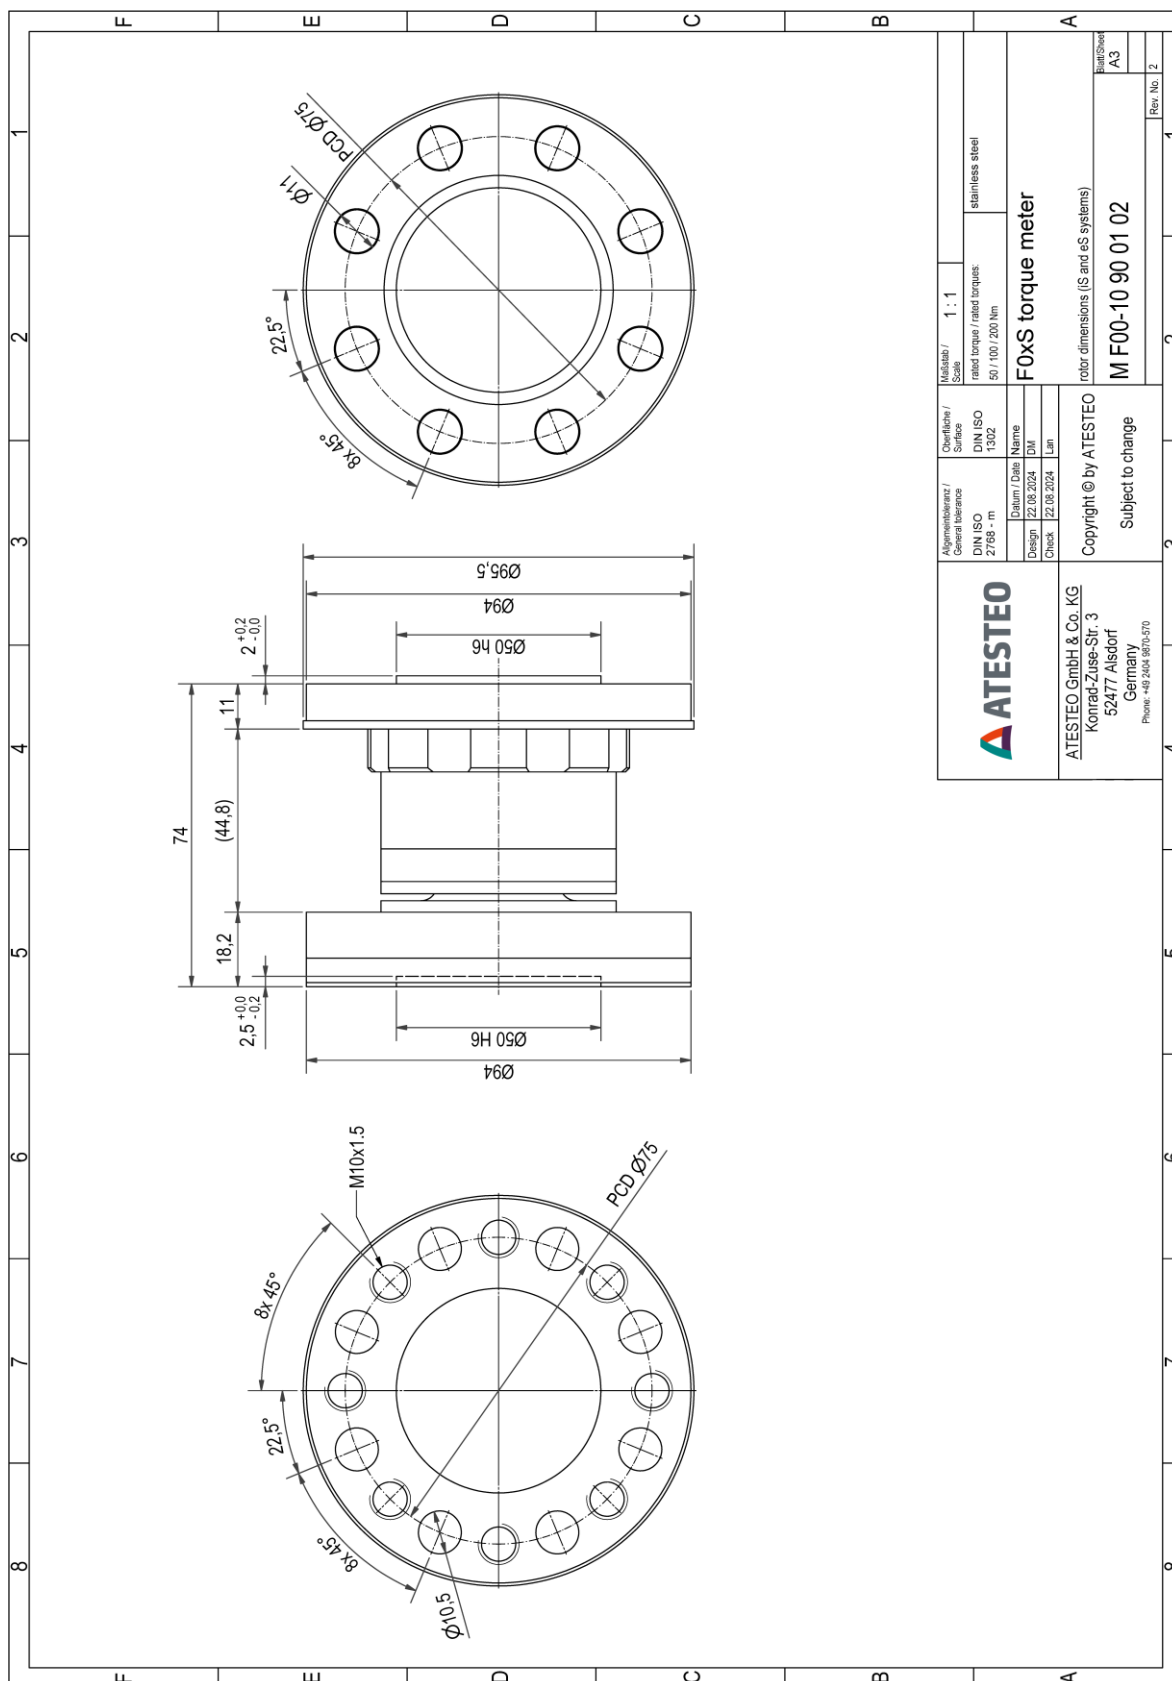


©2025, ATESTEO GmbH & Co. KG, This product data sheet was created on 06.17.2025.


The information contained in the product data sheet corresponds to the status quo at the time the document was created. ATESTEO continually further develops its products and reserves the right to make changes to the technical data. ATESTEO does not accept any liability for consequential losses arising from the use of this product data sheet or the information contained therein.



Drawing

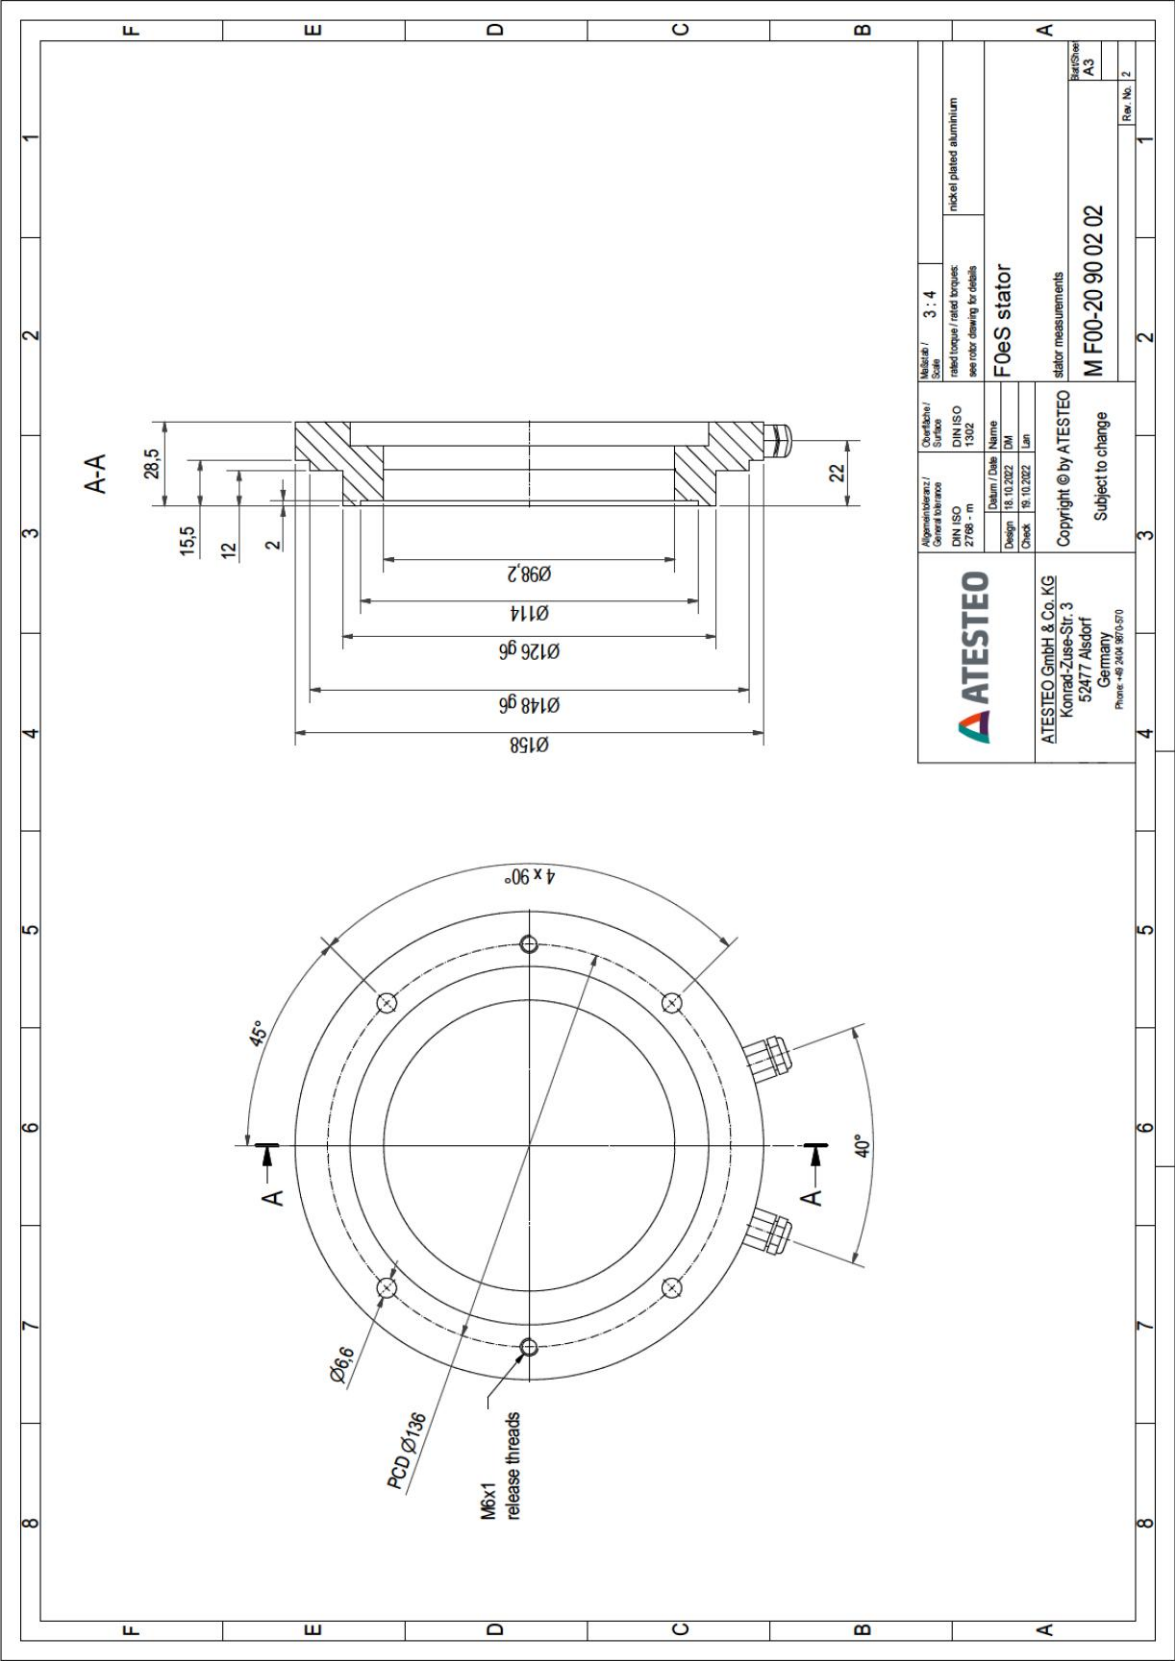

## Drawing

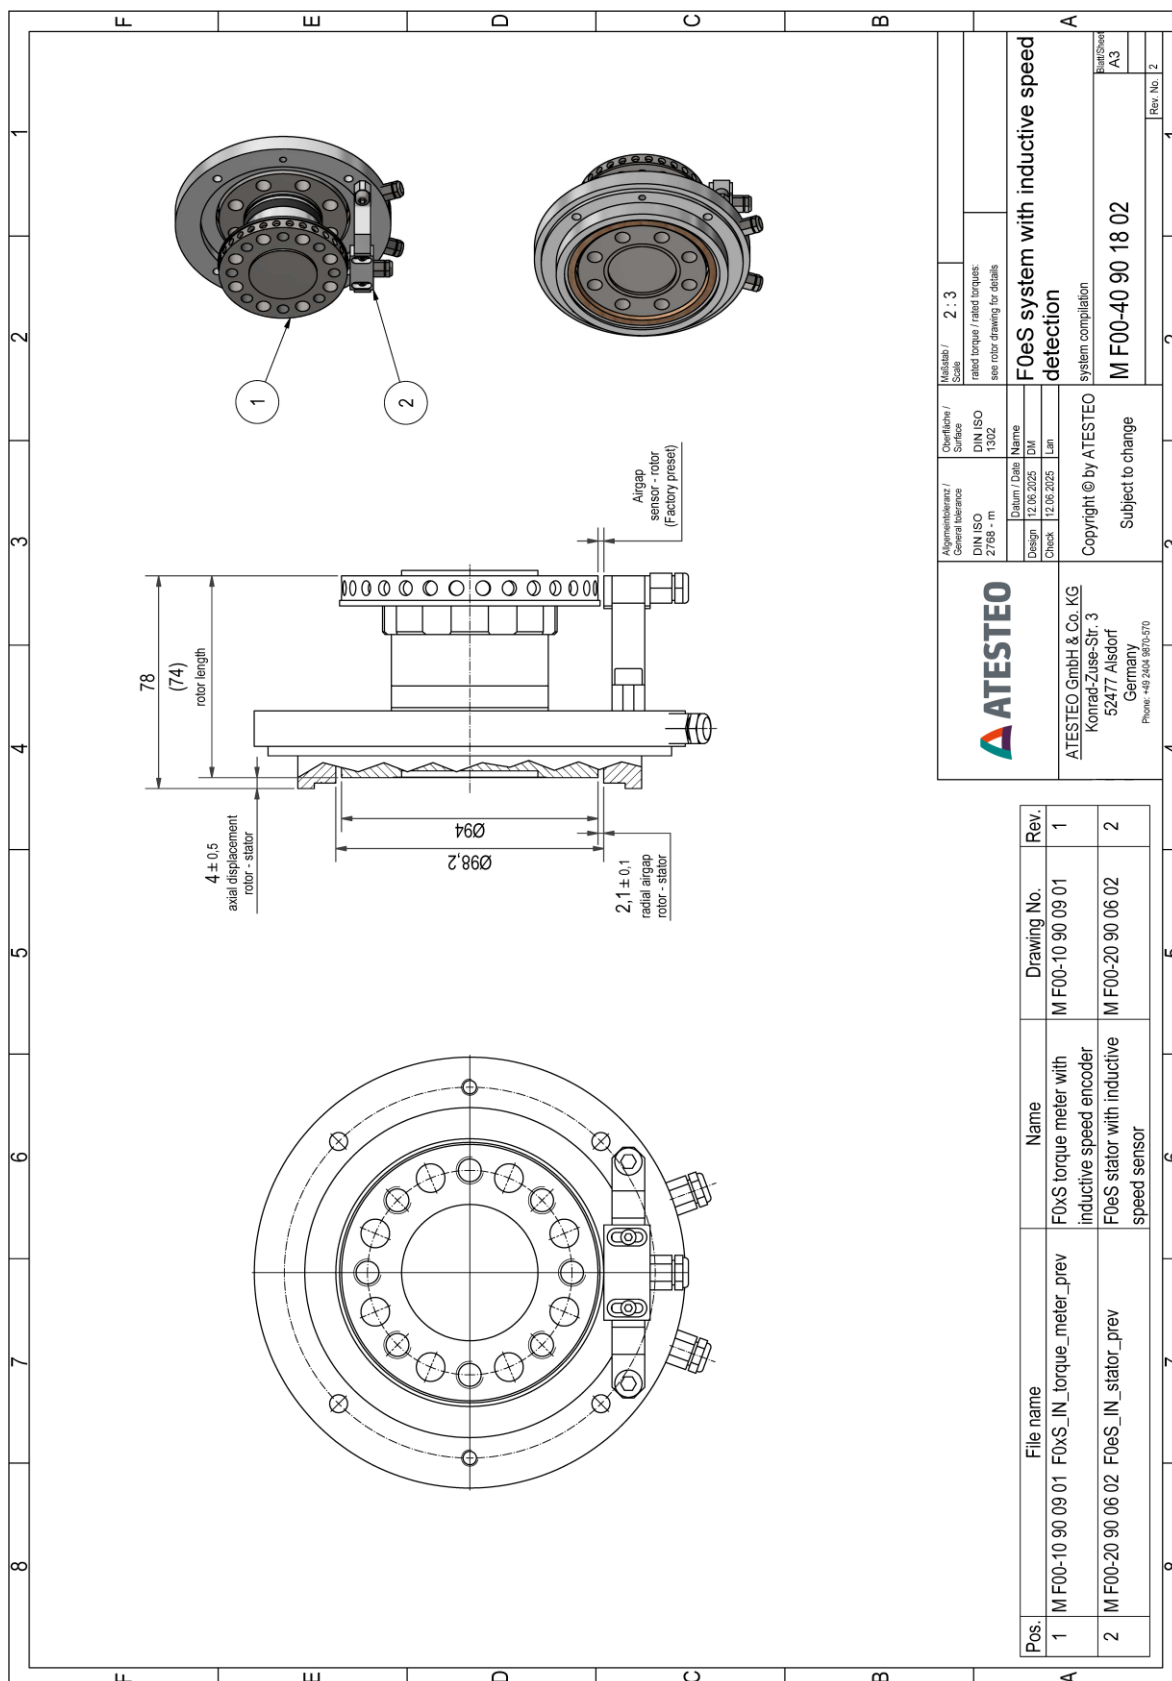


©2025, ATESTEO GmbH & Co. KG, This product data sheet was created on 06.17.2025.

The information contained in the product data sheet corresponds to the status quo at the time the document was created. ATESTEO continually further develops its products and reserves the right to make changes to the technical data. ATESTEO does not accept any liability for consequential losses arising from the use of this product data sheet or the information contained therein.


|                          |  |                      |  |
|--------------------------|--|----------------------|--|
| ATESTEO                  |  | Overflakes / Surface | Material / Scale                               |
| ATESTEO GmbH & Co. KG    |  | DIN ISO 1302         | 50 / 100 / 200 Nm                              |
| Konrad-Zuse-Str. 3       |  | DIN ISO 2768 - m     | stainless steel                                |
| 52477 Alsdorf            |  | Design               | F0xS torque meter with inductive speed encoder |
| Germany                  |  | Check                |  |
| Phone: +49 2405 9870-070 |  | Date                 | rotor dimensions (IS and eS systems)           |
|                          |  | 27.08.2024           |  |
|                          |  | 27.08.2024           | M F00-10 90 09 01                              |
|                          |  | 27.08.2024           |  |
|                          |  | 27.08.2024           | Subject to change                              |
|                          |  | 27.08.2024           |  |
|                          |  | 27.08.2024           | Rev. No. 1                                     |
|                          |  | 27.08.2024           |  |
|                          |  | 27.08.2024           | Rev. No. 1                                     |
|                          |  | 27.08.2024           |  |
|                          |  | 27.08.2024           | Rev. No. 1                                     |
|                          |  | 27.08.2024           |  |
|                          |  | 27.08.2024           | Rev. No. 1                                     |
|                          |  | 27.08.2024           |  |
|                          |  | 27.08.2024           | Rev. No. 1                                     |
|                          |  | 27.08.2024           |  |
|                          |  | 27.08.2024           | Rev. No. 1                                     |
|                          |  | 27.08.2024           |  |
|                          |  | 27.08.2024           | Rev. No. 1                                     |
|                          |  | 27.08.2024           |  |
|                          |  | 27.08.2024           | Rev. No. 1                                     |
|                          |  | 27.08.2024           |  |
|                          |  | 27.08.2024           | Rev. No. 1                                     |
|                          |  | 27.08.2024           |  |
|                          |  | 27.08.2024           | Rev. No. 1                                     |
|                          |  | 27.08.2024           |  |
|                          |  | 27.08.2024           | Rev. No. 1                                     |
|                          |  | 27.08.2024           |  |
|                          |  | 27.08.2024           | Rev. No. 1                                     |
|                          |  | 27.08.2024           |  |
|                          |  | 27.08.2024           | Rev. No. 1                                     |
|                          |  | 27.08.2024           |  |
|                          |  | 27.08.2024           | Rev. No. 1                                     |
|                          |  | 27.08.2024           |  |
|                          |  | 27.08.2024           | Rev. No. 1                                     |
|                          |  | 27.08.2024           |  |
|                          |  | 27.08.2024           | Rev. No. 1                                     |
|                          |  | 27.08.2024           |  |
|                          |  | 27.08.2024           | Rev. No. 1                                     |
|                          |  | 27.08.2024           |  |
|                          |  | 27.08.2024           | Rev. No. 1                                     |
|                          |  | 27.08.2024           |  |
|                          |  | 27.08.2024           | Rev. No. 1                                     |
|                          |  | 27.08.2024           |  |
|                          |  | 27.08.2024           | Rev. No. 1                                     |
|                          |  | 27.08.2024           |  |
|                          |  | 27.08.2024           | Rev. No. 1                                     |
|                          |  | 27.08.2024           |  |
|                          |  | 27.08.2024           | Rev. No. 1                                     |
|                          |  | 27.08.2024           |  |
|                          |  | 27.08.2024           | Rev. No. 1                                     |
|                          |  | 27.08.2024           |  |
|                          |  | 27.08.2024           | Rev. No. 1                                     |
|                          |  | 27.08.2024           |  |
|                          |  | 27.08.2024           | Rev. No. 1                                     |
|                          |  | 27.08.2024           |  |
|                          |  | 27.08.2024           | Rev. No. 1                                     |
|                          |  | 27.08.2024           |  |
|                          |  | 27.08.2024           | Rev. No. 1                                     |
|                          |  | 27.08.2024           |  |
|                          |  | 27.08.2024           | Rev. No. 1                                     |
|                          |  | 27.08.2024           |  |
|                          |  | 27.08.2024           | Rev. No. 1                                     |
|                          |  | 27.08.2024           |  |
|                          |  |                      |  |

The information contained in the product data sheet corresponds to the status quo at the time the document was created. ATESTEO continually further develops its products and reserves the right to make changes to the technical data. ATESTEO does not accept any liability for consequential losses arising from the use of this product data sheet or the information contained therein.


Drawing

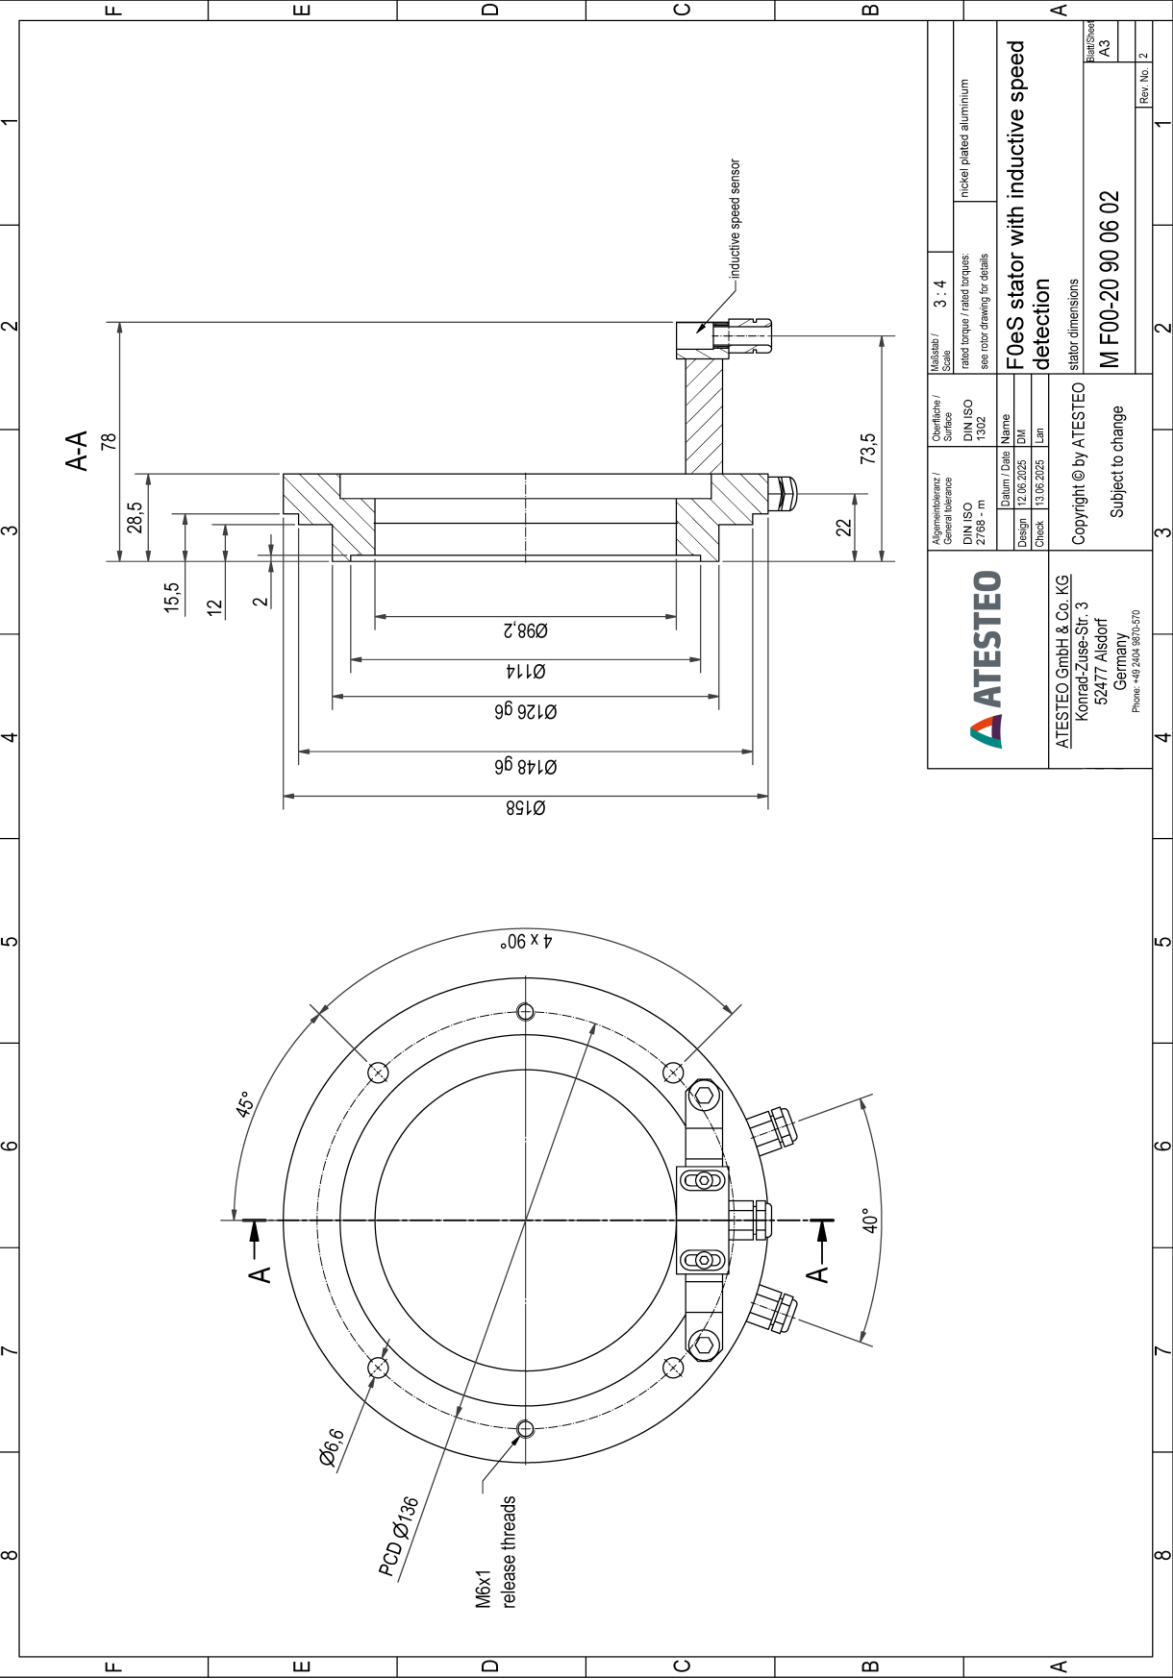

Drawing

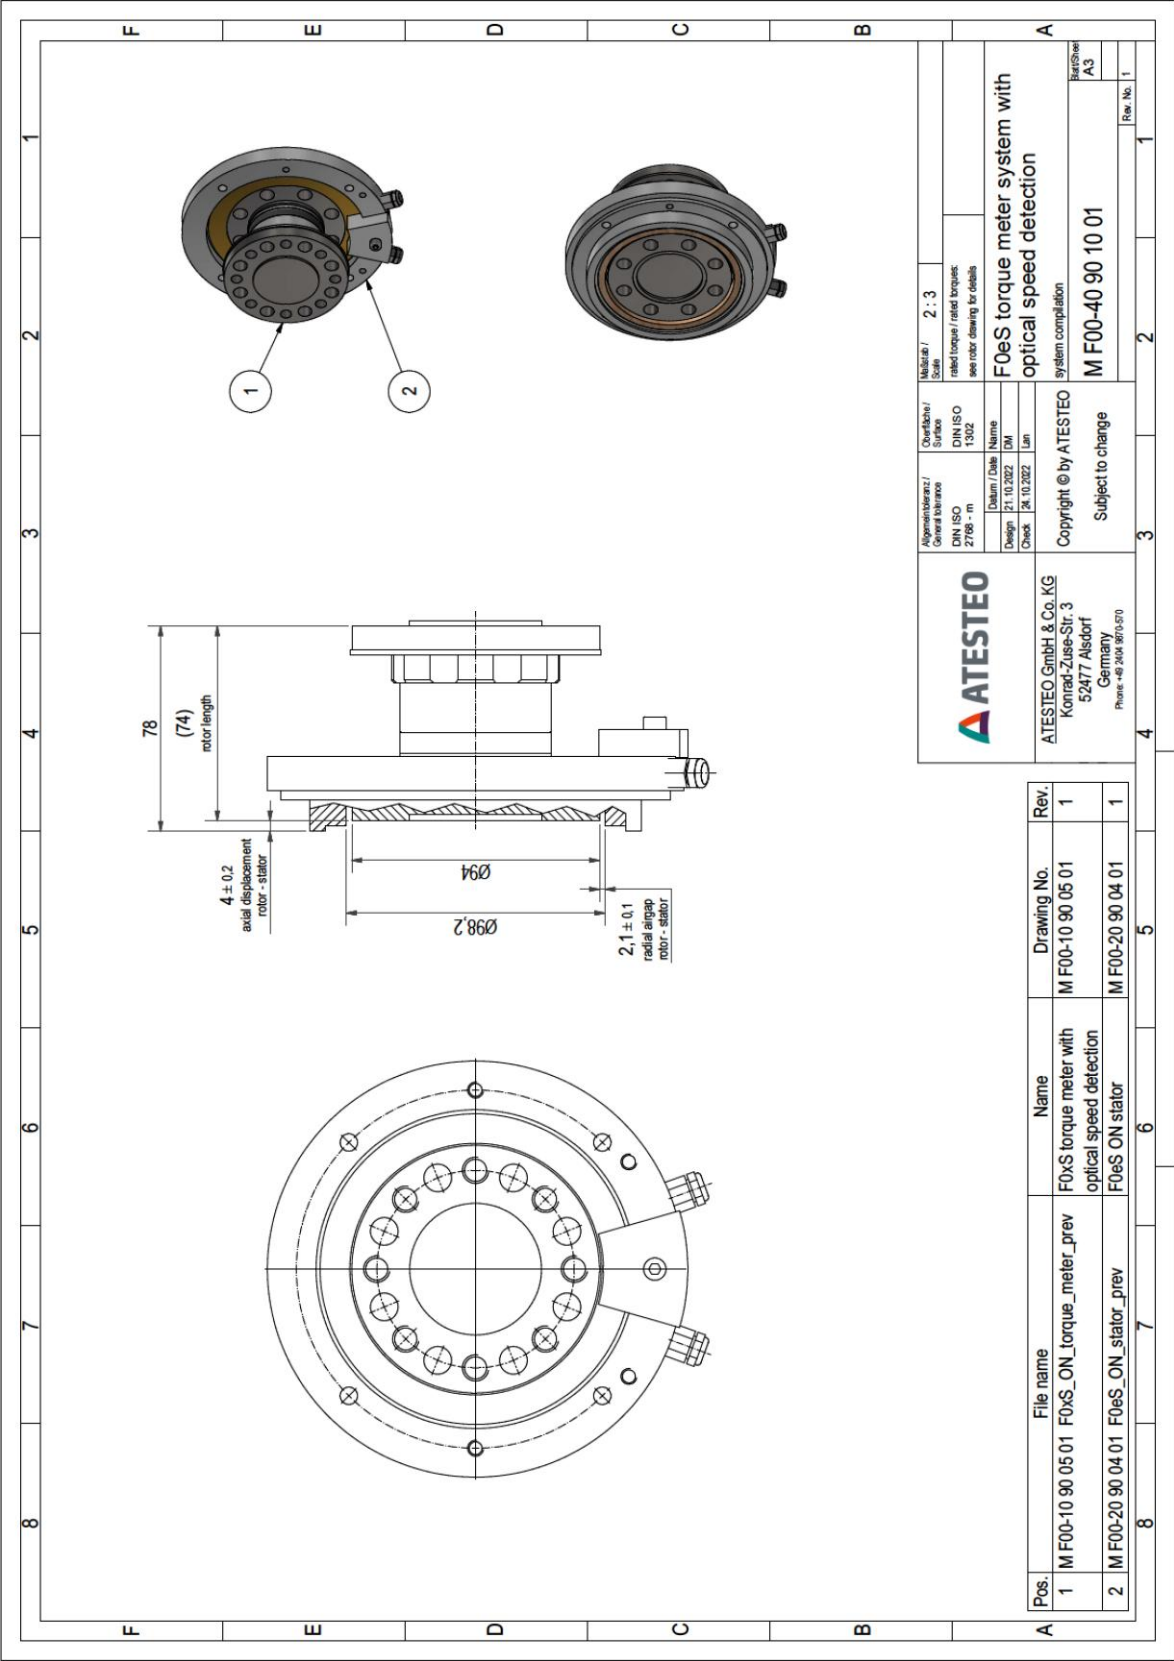

## Drawing

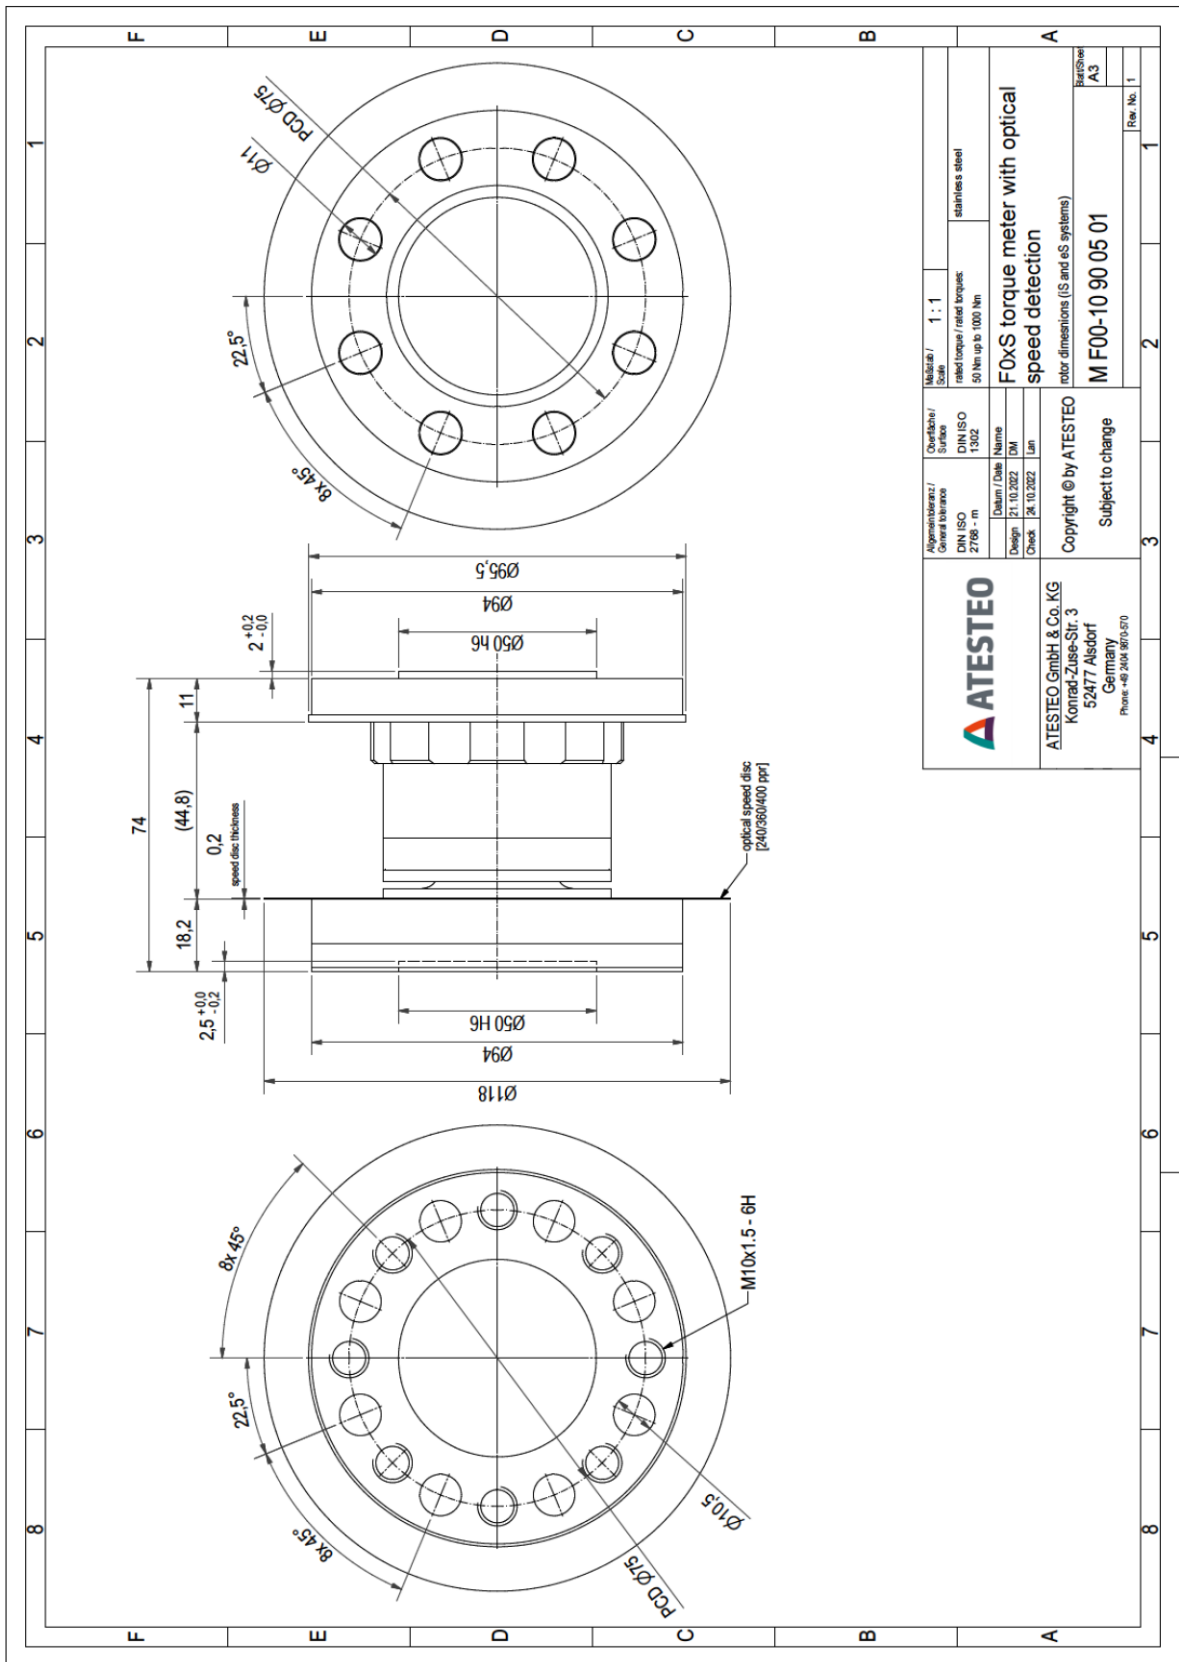

©2025, ATESTEO GmbH & Co. KG, This product data sheet was created on 06.17.2025.

The information contained in the product data sheet corresponds to the status quo at the time the document was created. ATESTEO continually further develops its products and reserves the right to make changes to the technical data. ATESTEO does not accept any liability for consequential losses arising from the use of this product data sheet or the information contained therein.

**Technical Drawing: F0eS ON stator**


**Section A-A:** Cross-section of the stator showing four poles. Dimensions include diameters (Ø158, Ø148, Ø126, Ø114, Ø98.2), lengths (28.5, 15.5, 12, 2, 22, 38.5), and a 4x90° pole arrangement.

**Top View:** Circular view of the stator showing a PCD of Ø136, M6x1 release threads, and an optical speed detection module. A 40° angle is indicated for the module's position.

| ATESTEO  |  | Material / Scale        |  | Quantity / Surface   |  |
|--|--|-------------------------|--|--|--|
| ATESTEO GmbH & Co. KG<br>Konrad-Zuse-Str. 3<br>52477 Alsdorf<br>Germany<br>Phone: +49 204 8615-570 |  | nickel plated aluminium |  | 3 : 4  |  |
| Copyright © by ATESTEO<br>Subject to change  |  | F0eS ON stator          |  | related torque / rated torque<br>see motor drawing for details |  |
| DIN ISO 2768 - m   |  | DIN ISO 1302            |  | see motor drawing for details                                  |  |
| Design 18.10.2022  |  | Date 24.10.2022         |  | Name   |  |
| Check  |  | Lan                     |  | Rev. No. 1   |  |




Drawing

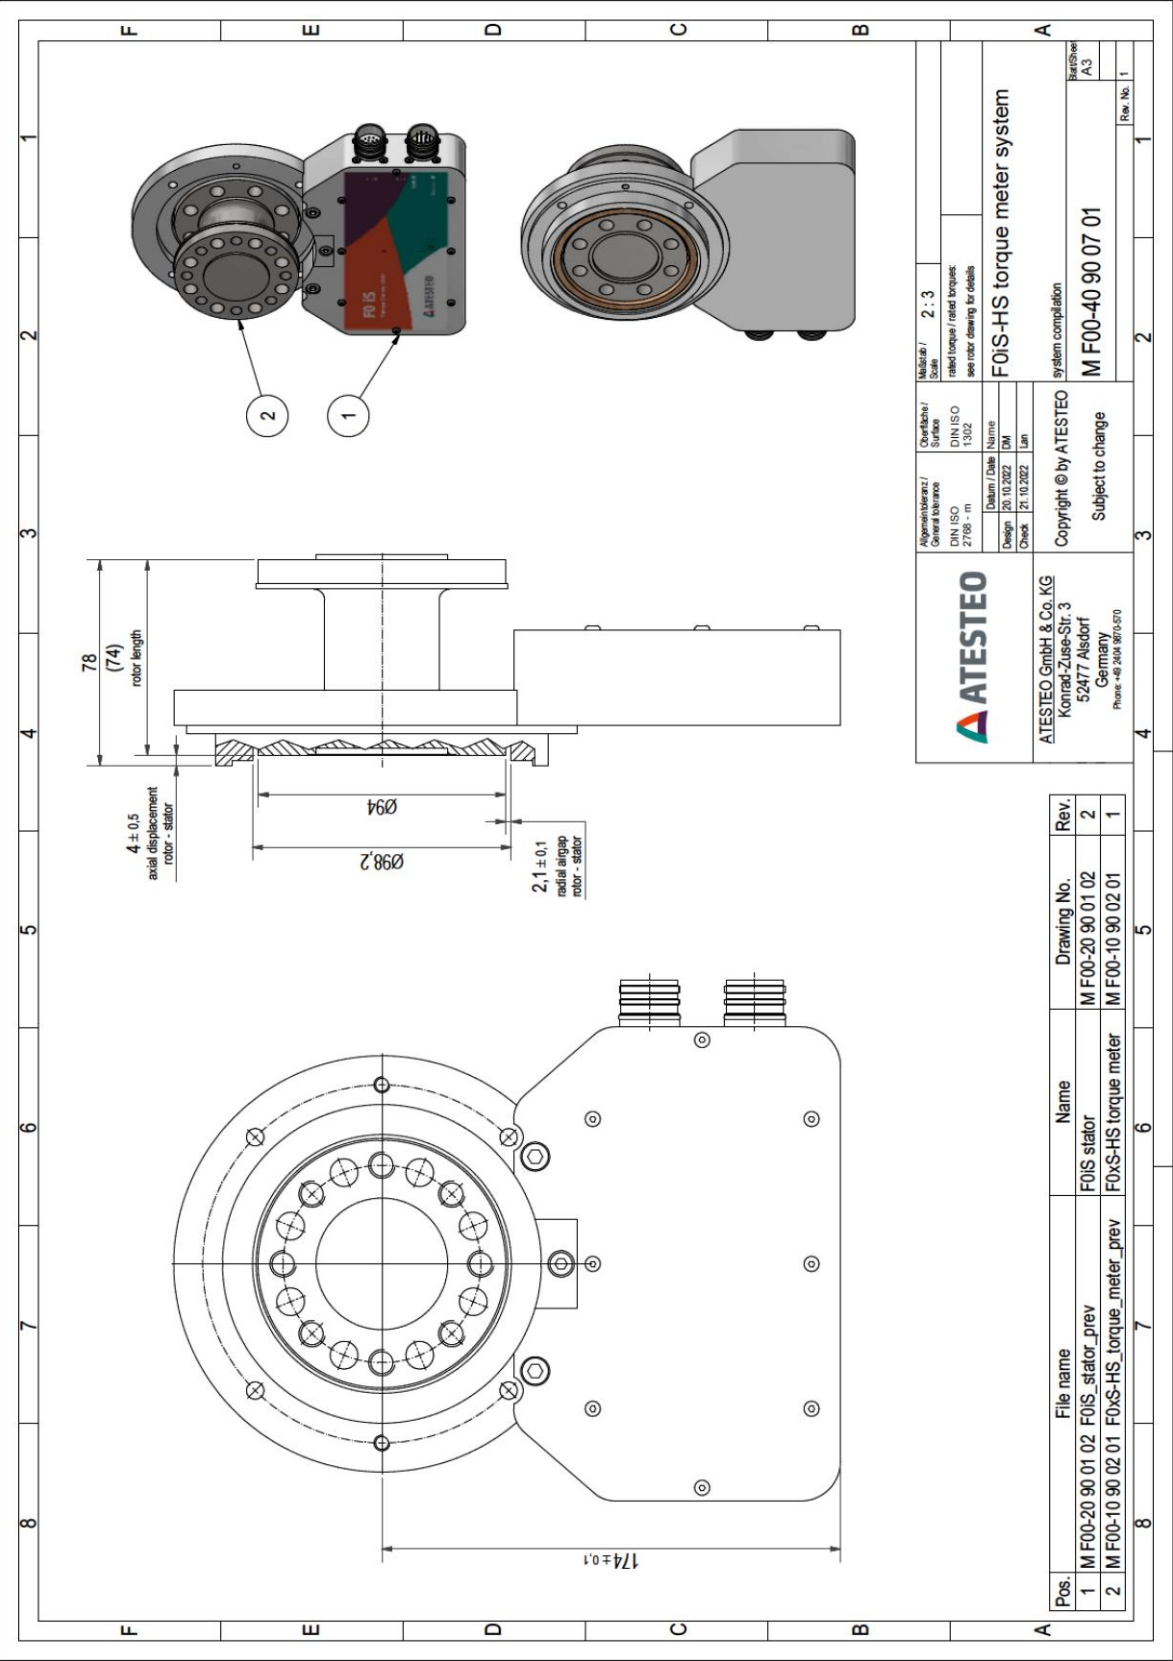




Drawing

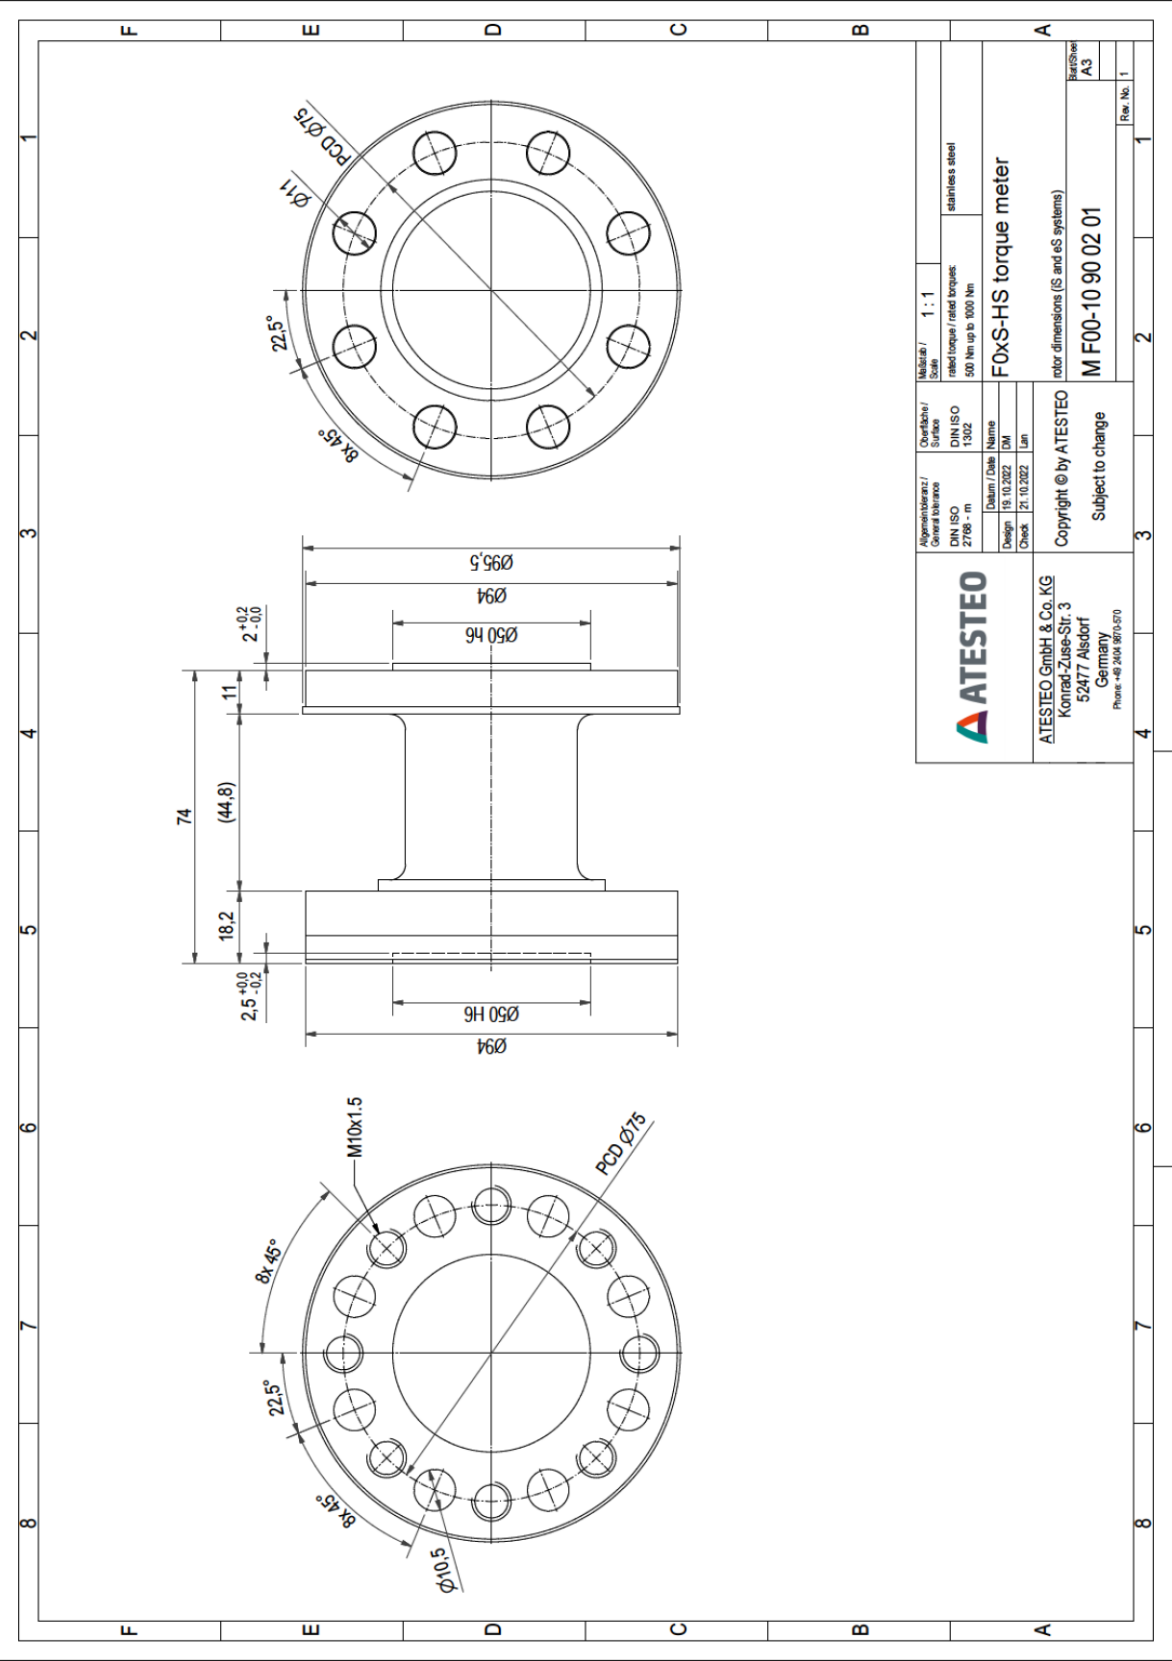


## Drawing

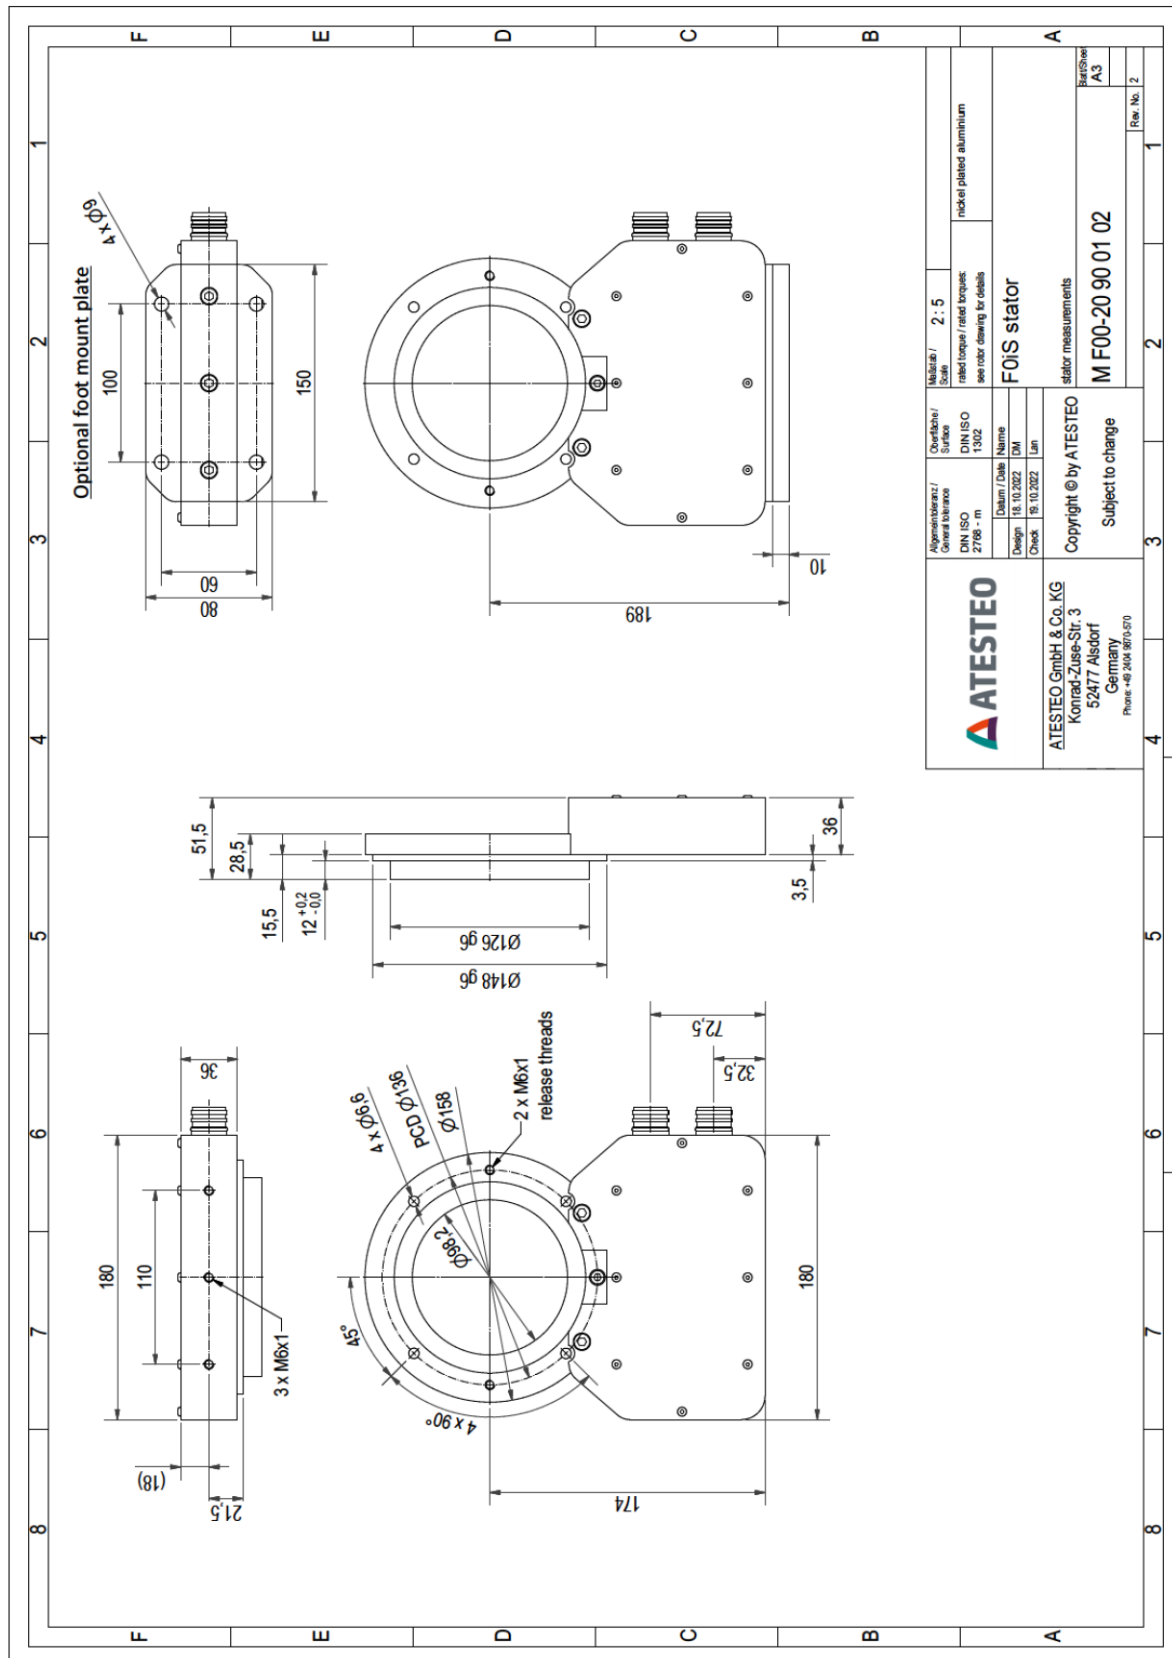

©2025, ATESTEO GmbH & Co. KG, This product data sheet was created on 06.17.2025.

The information contained in the product data sheet corresponds to the status quo at the time the document was created. ATESTEO continually further develops its products and reserves the right to make changes to the technical data. ATESTEO does not accept any liability for consequential losses arising from the use of this product data sheet or the information contained therein.


## Drawing

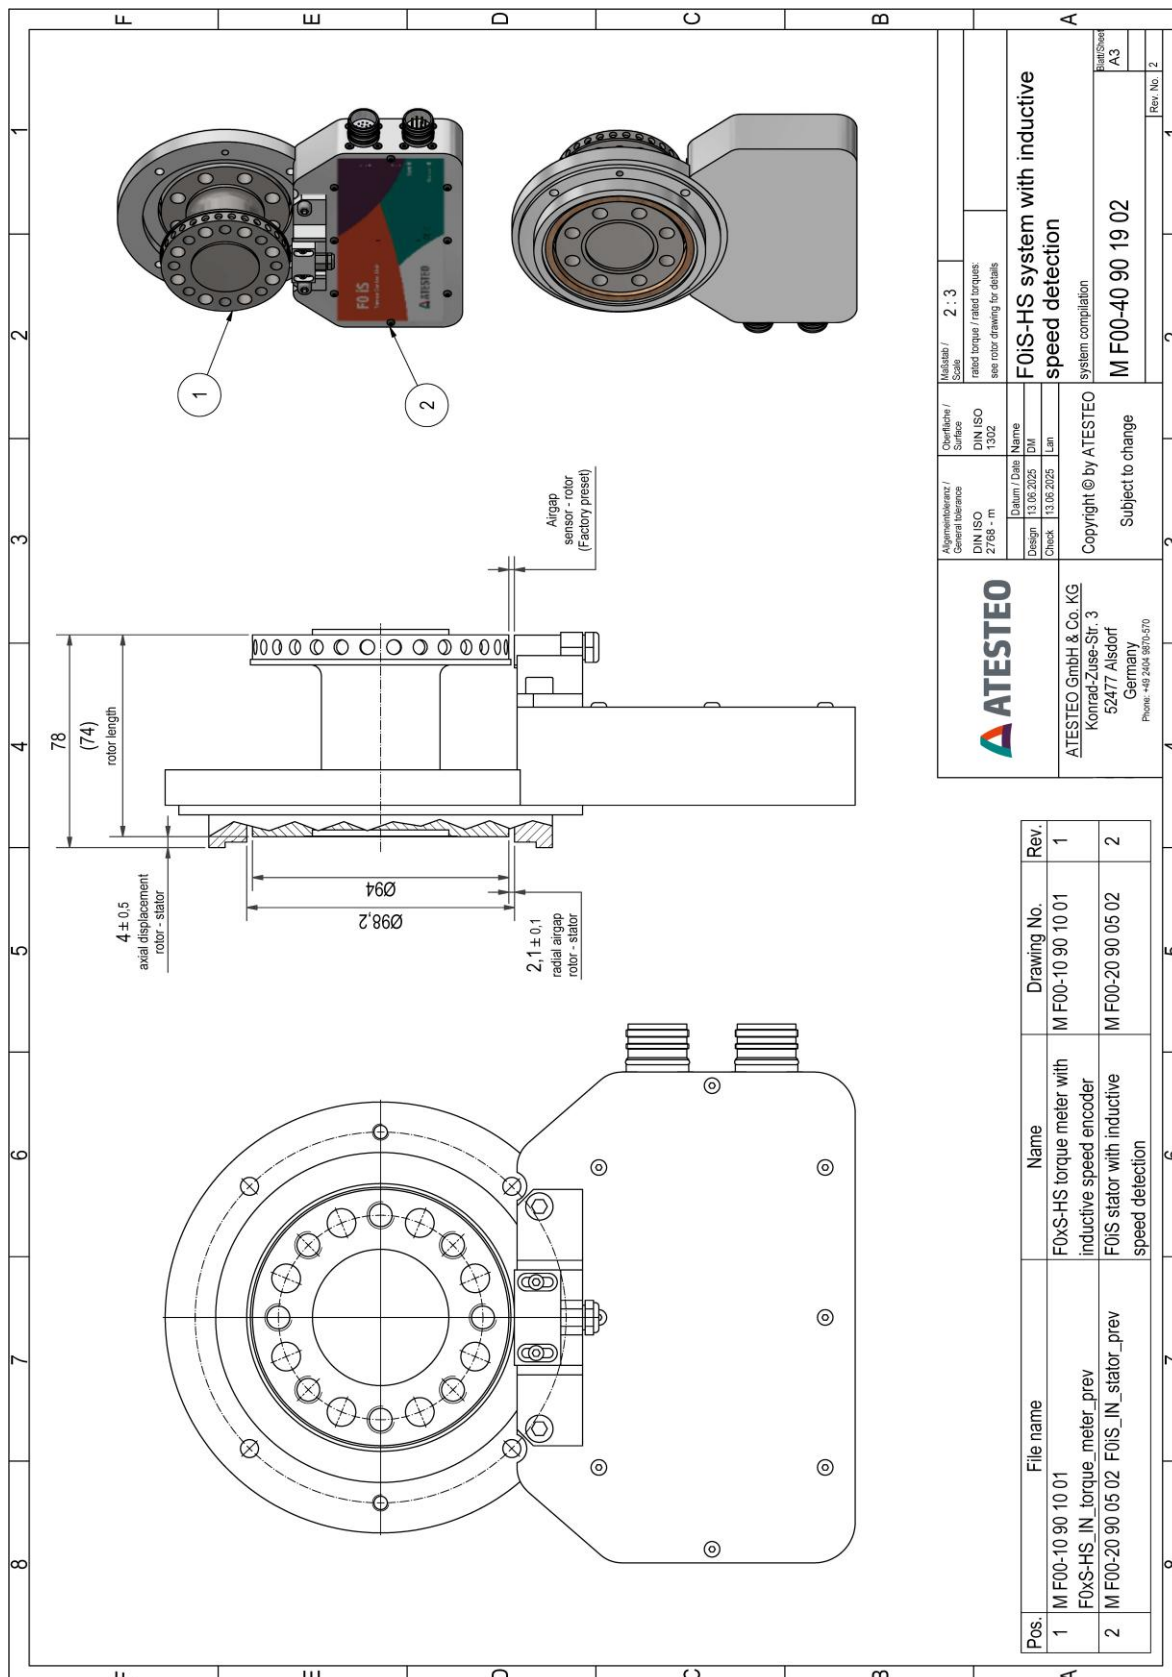

©2025, ATESTEO GmbH & Co. KG, This product data sheet was created on 06.17.2025.

The information contained in the product data sheet corresponds to the status quo at the time the document was created. ATESTEO continually further develops its products and reserves the right to make changes to the technical data. ATESTEO does not accept any liability for consequential losses arising from the use of this product data sheet or the information contained therein.


## Drawing

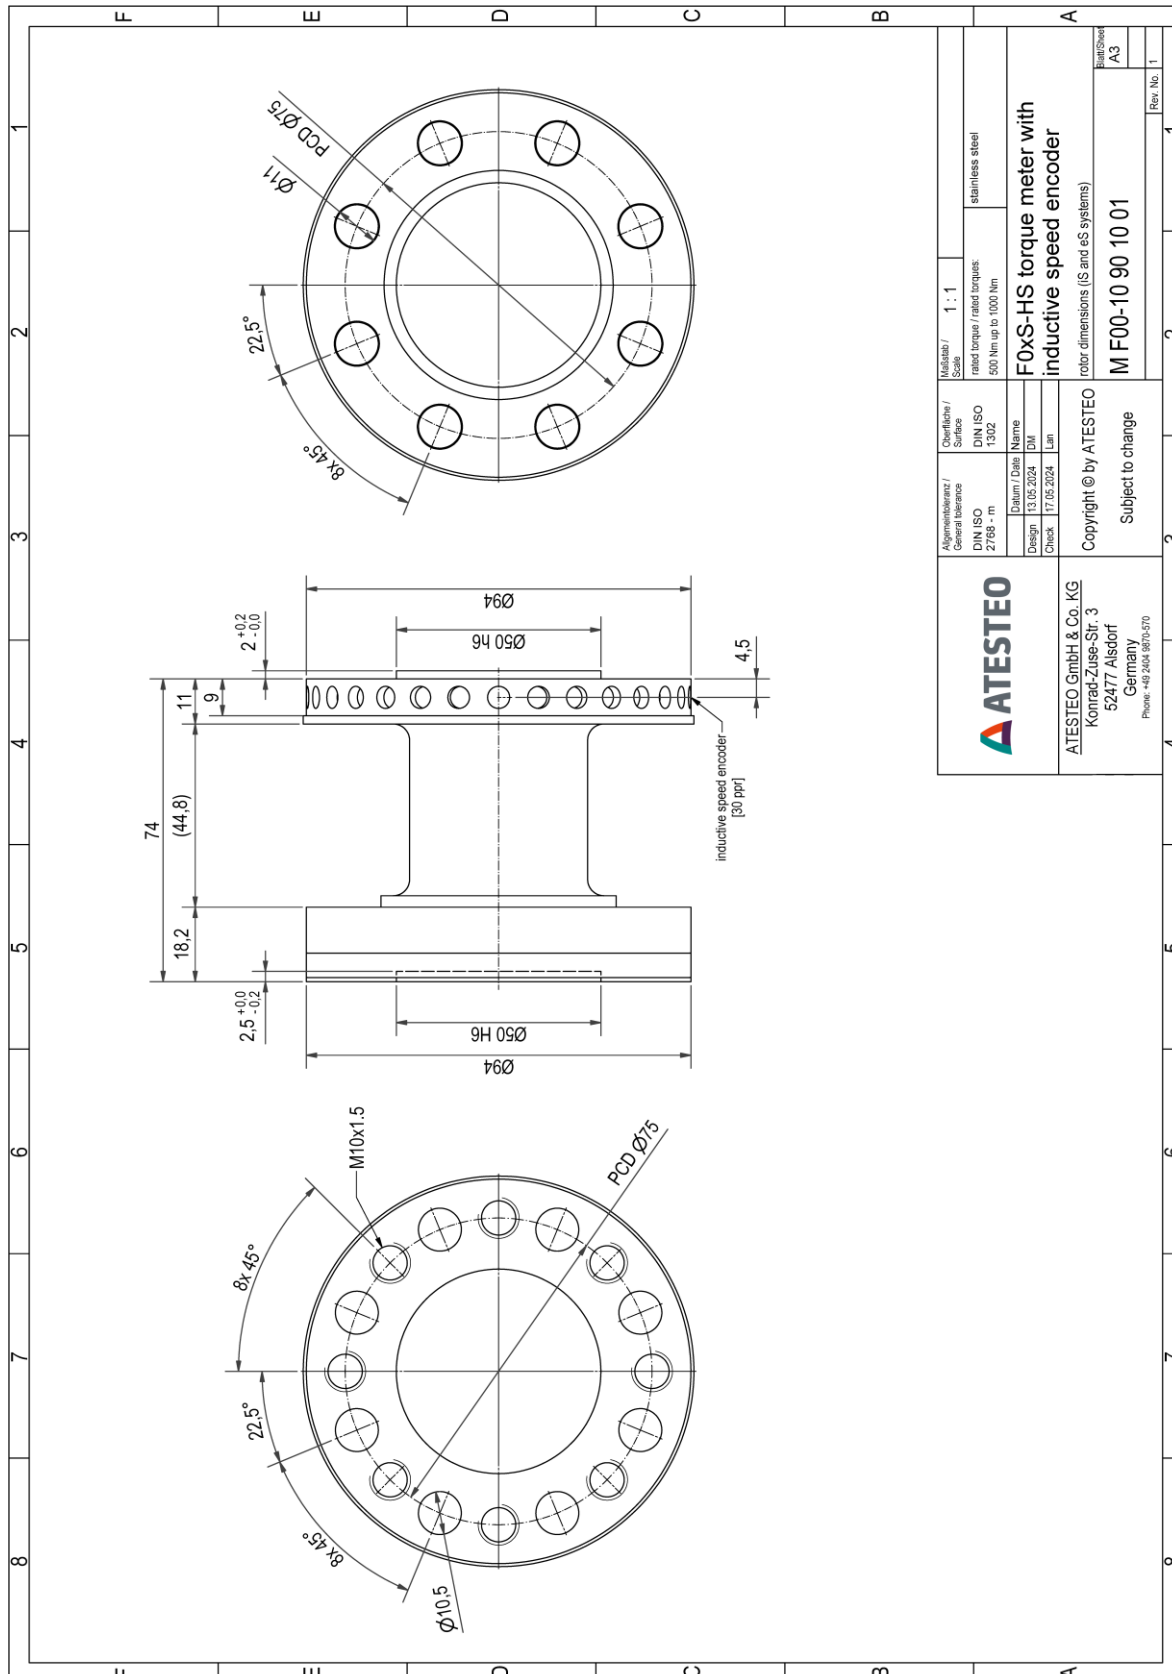


©2025, ATESTEO GmbH & Co. KG, This product data sheet was created on 06.17.2025.

The information contained in the product data sheet corresponds to the status quo at the time the document was created. ATESTEO continually further develops its products and reserves the right to make changes to the technical data. ATESTEO does not accept any liability for consequential losses arising from the use of this product data sheet or the information contained therein.


Drawing

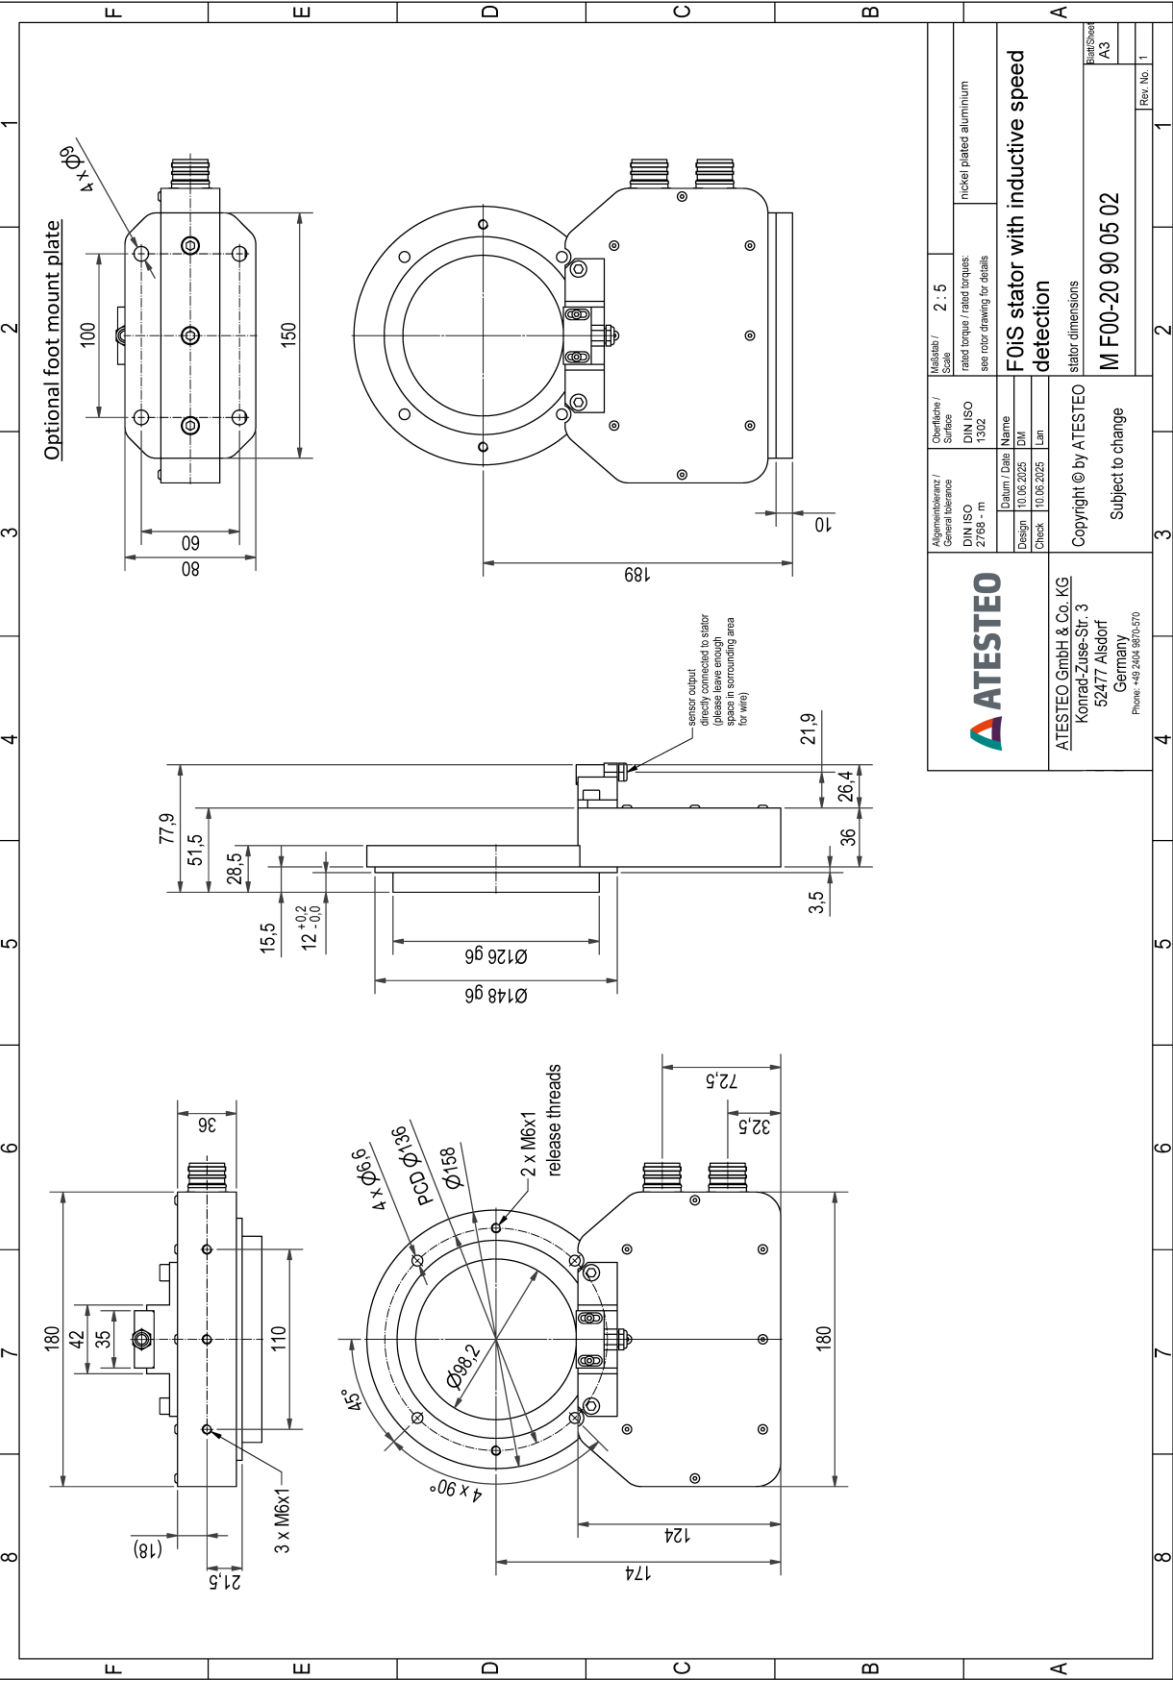

Drawing

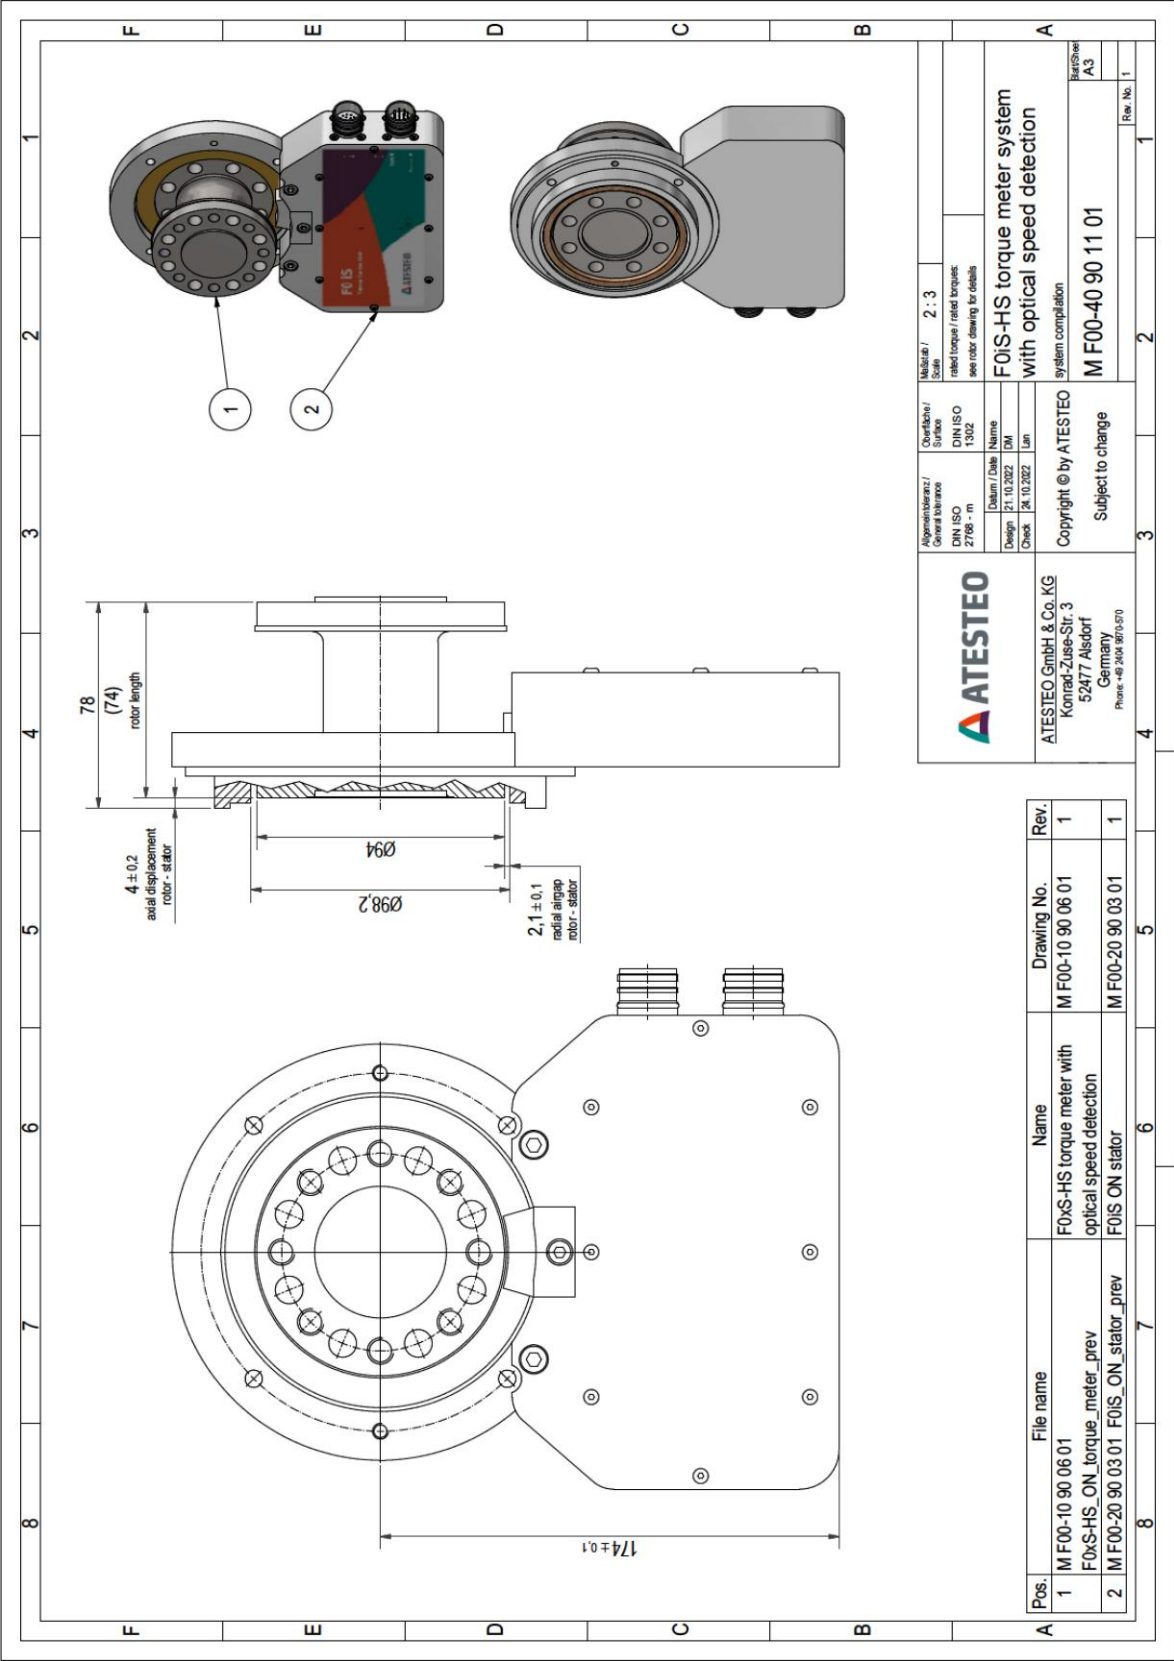


Drawing

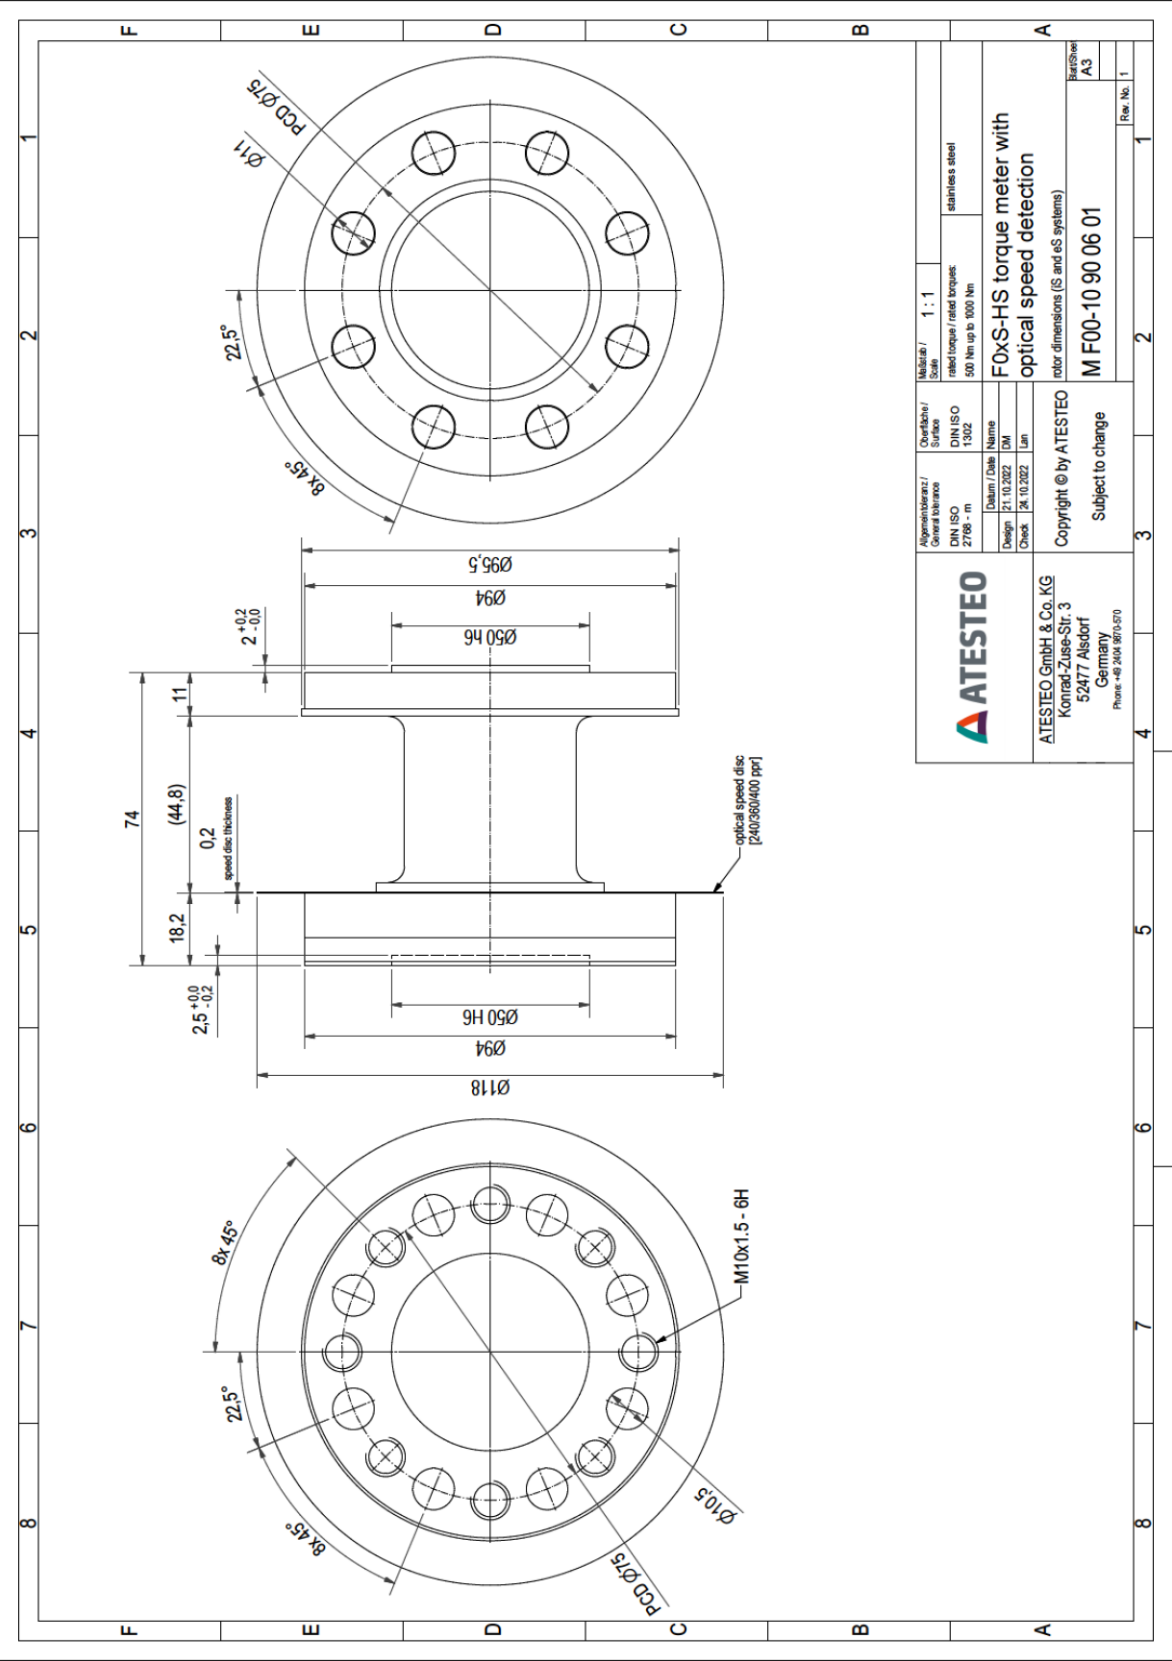




Drawing

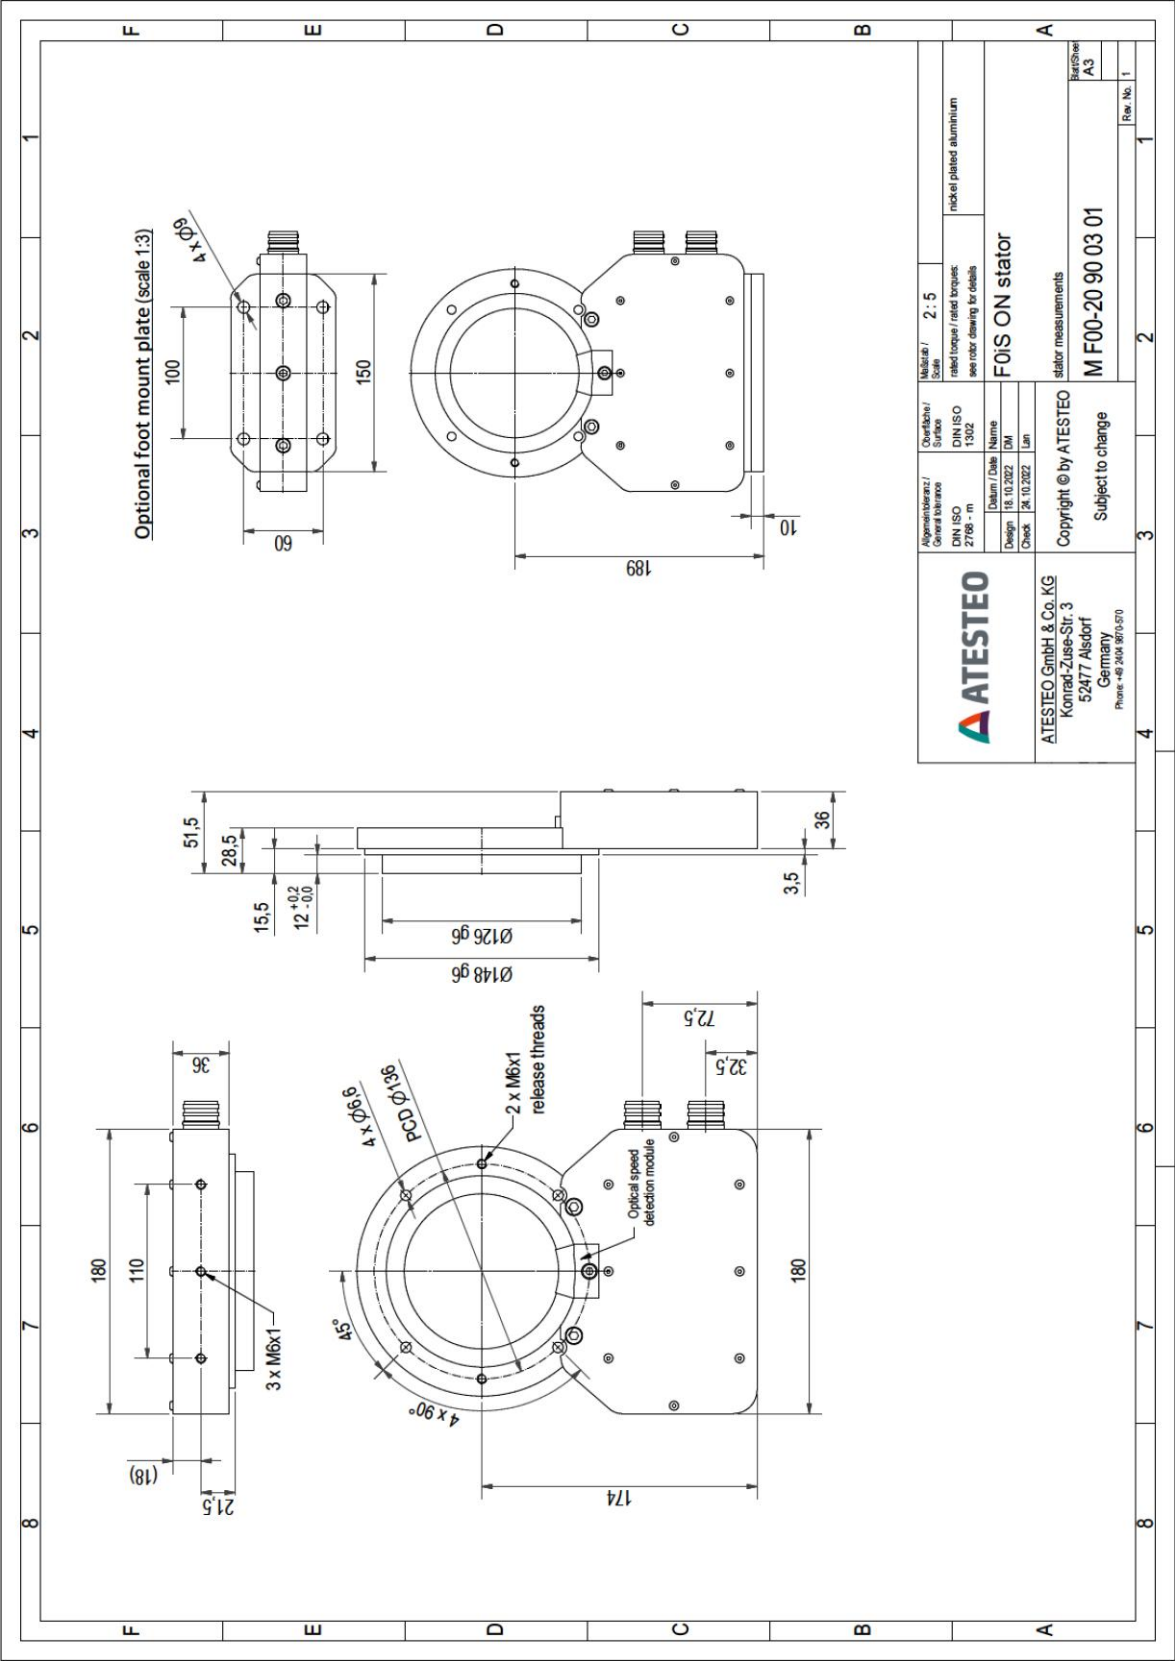




## Drawing

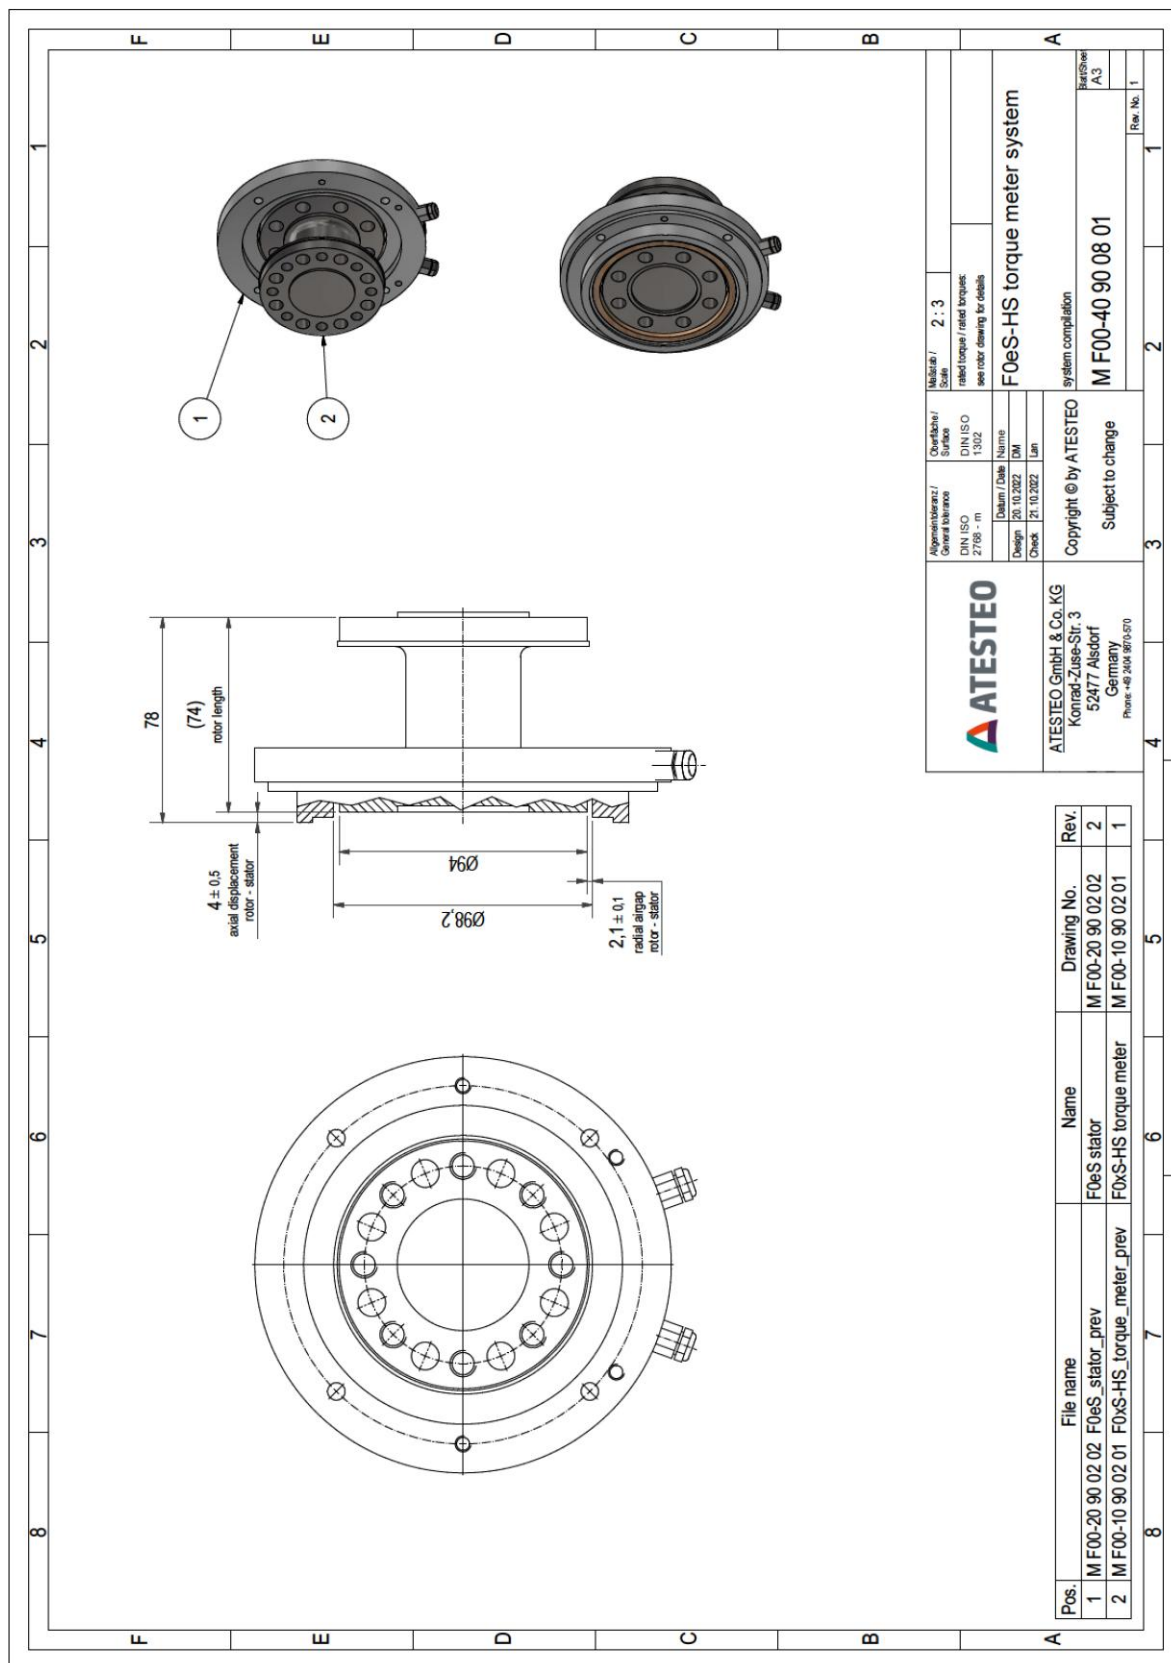


©2025, ATESTEO GmbH & Co. KG, This product data sheet was created on 06.17.2025.

The information contained in the product data sheet corresponds to the status quo at the time the document was created. ATESTEO continually further develops its products and reserves the right to make changes to the technical data. ATESTEO does not accept any liability for consequential losses arising from the use of this product data sheet or the information contained therein.

Drawing

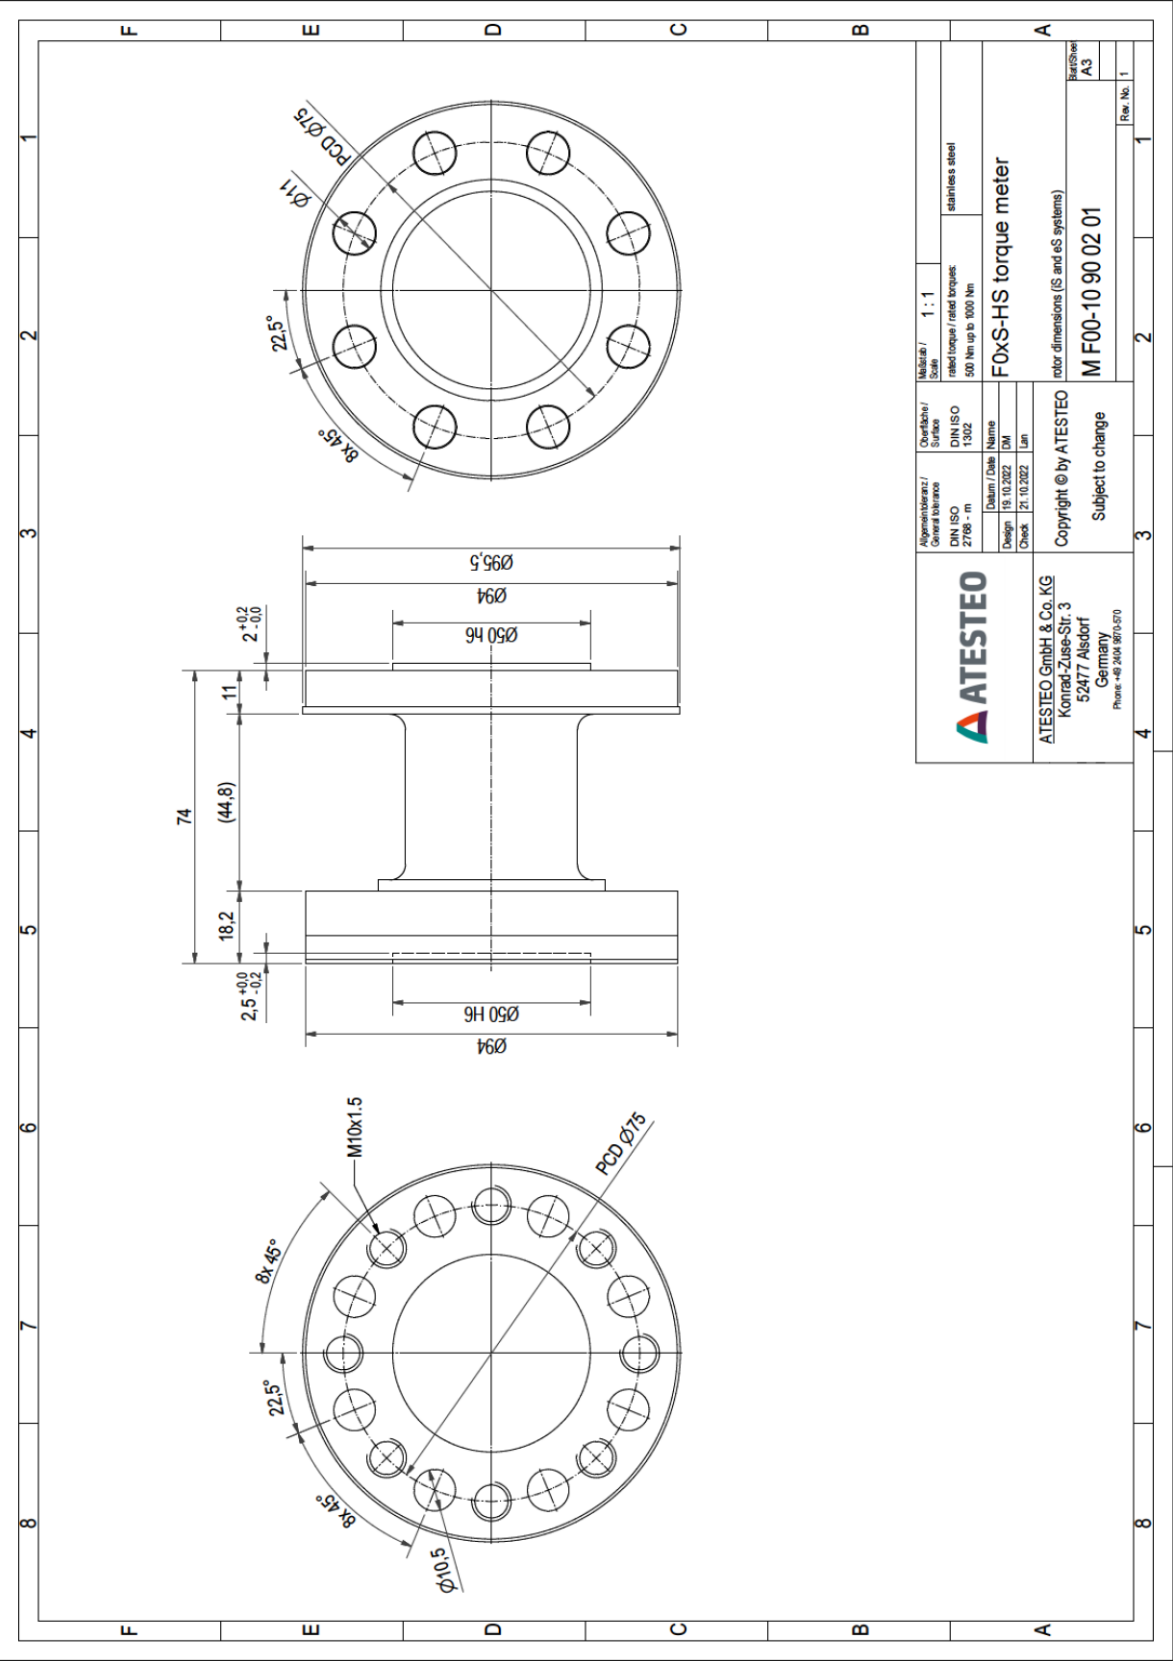

## Drawing

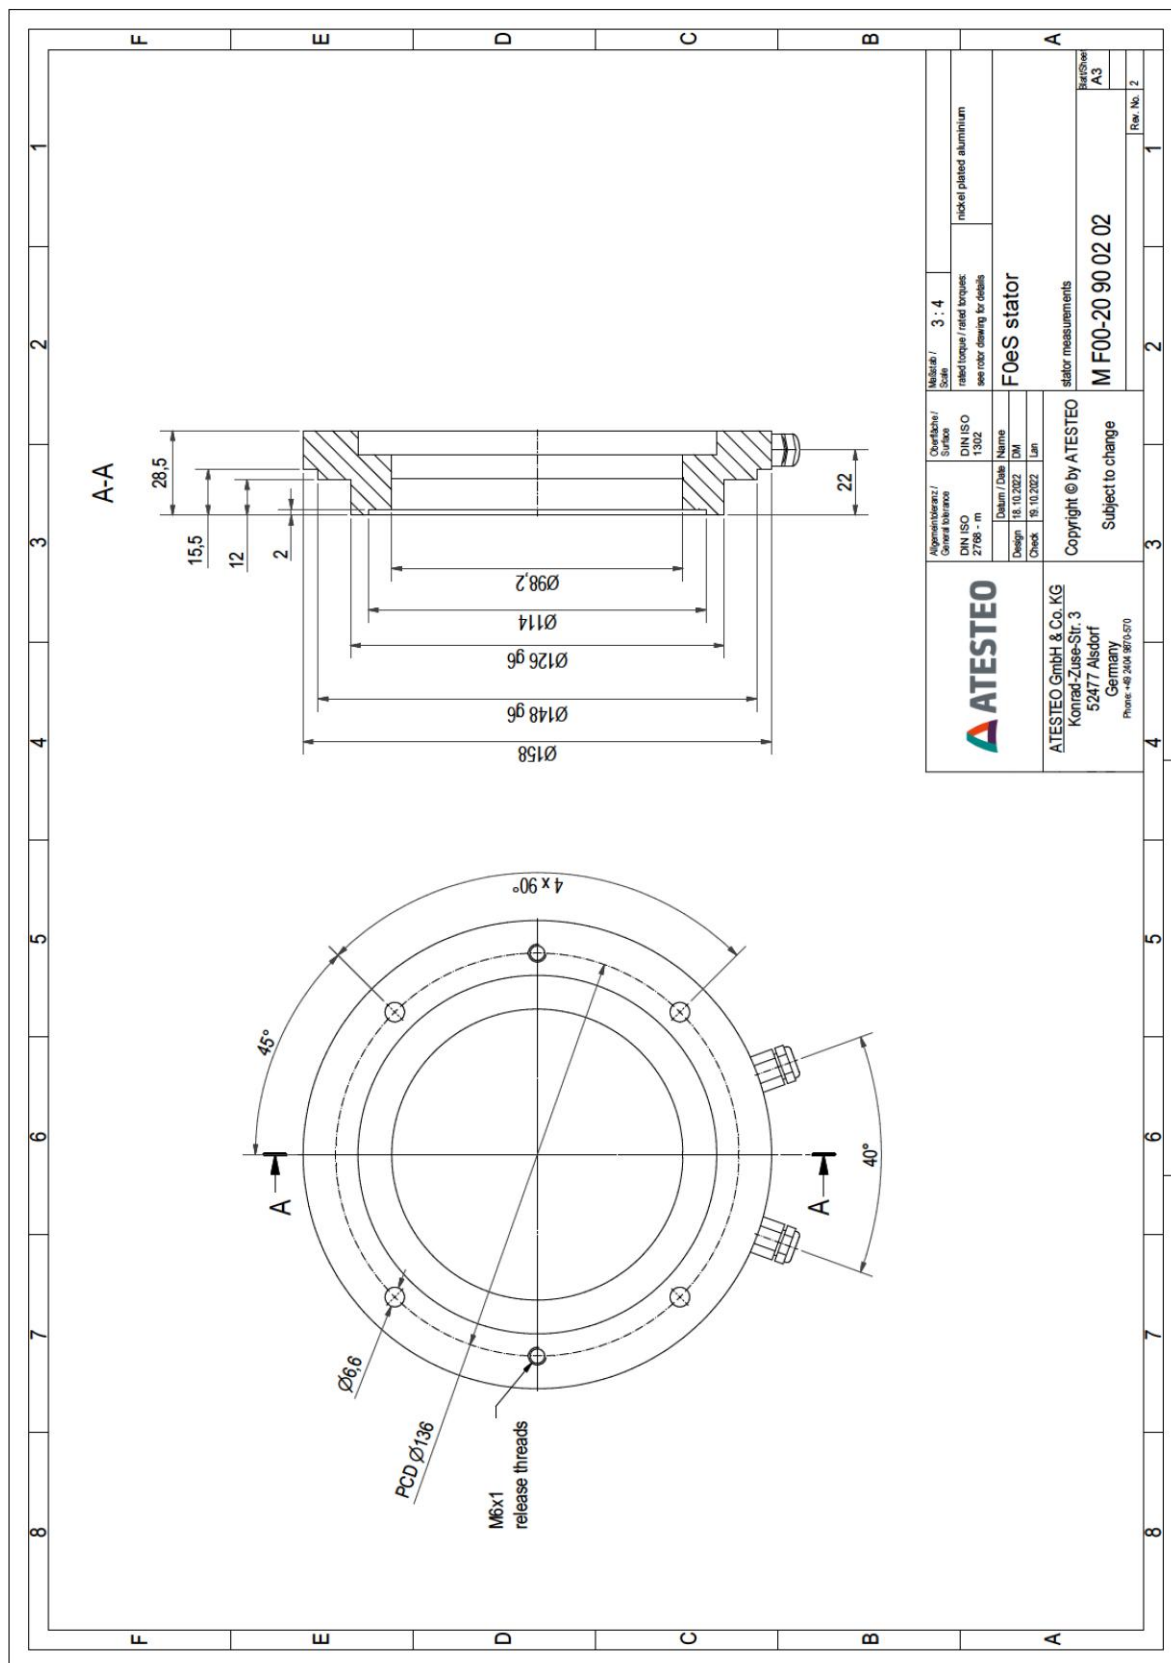


©2025, ATESTEO GmbH & Co. KG, This product data sheet was created on 06.17.2025.

The information contained in the product data sheet corresponds to the status quo at the time the document was created. ATESTEO continually further develops its products and reserves the right to make changes to the technical data. ATESTEO does not accept any liability for consequential losses arising from the use of this product data sheet or the information contained therein.

# F0eS-HS SPD\_IND System

# F0xS


## Drawing

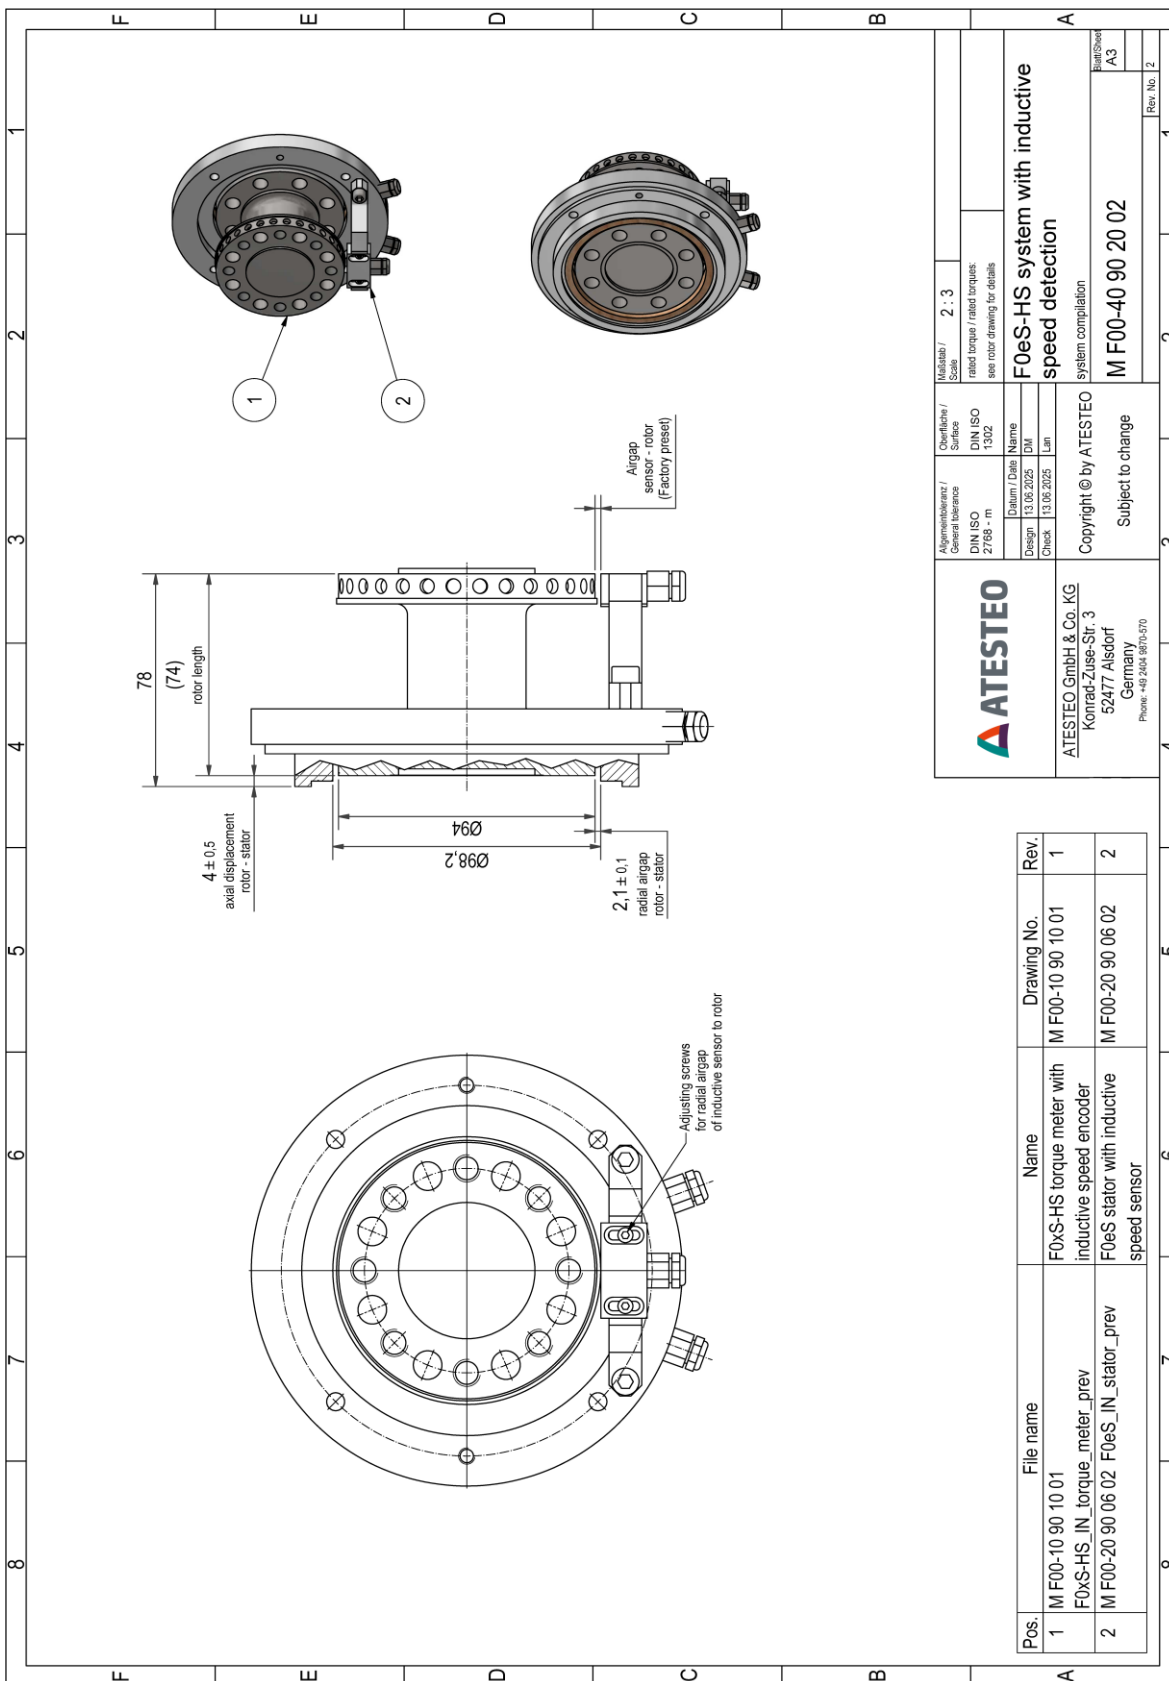


©2025, ATESTEO GmbH & Co. KG, This product data sheet was created on 06.17.2025.

The information contained in the product data sheet corresponds to the status quo at the time the document was created. ATESTEO continually further develops its products and reserves the right to make changes to the technical data. ATESTEO does not accept any liability for consequential losses arising from the use of this product data sheet or the information contained therein.


Drawing

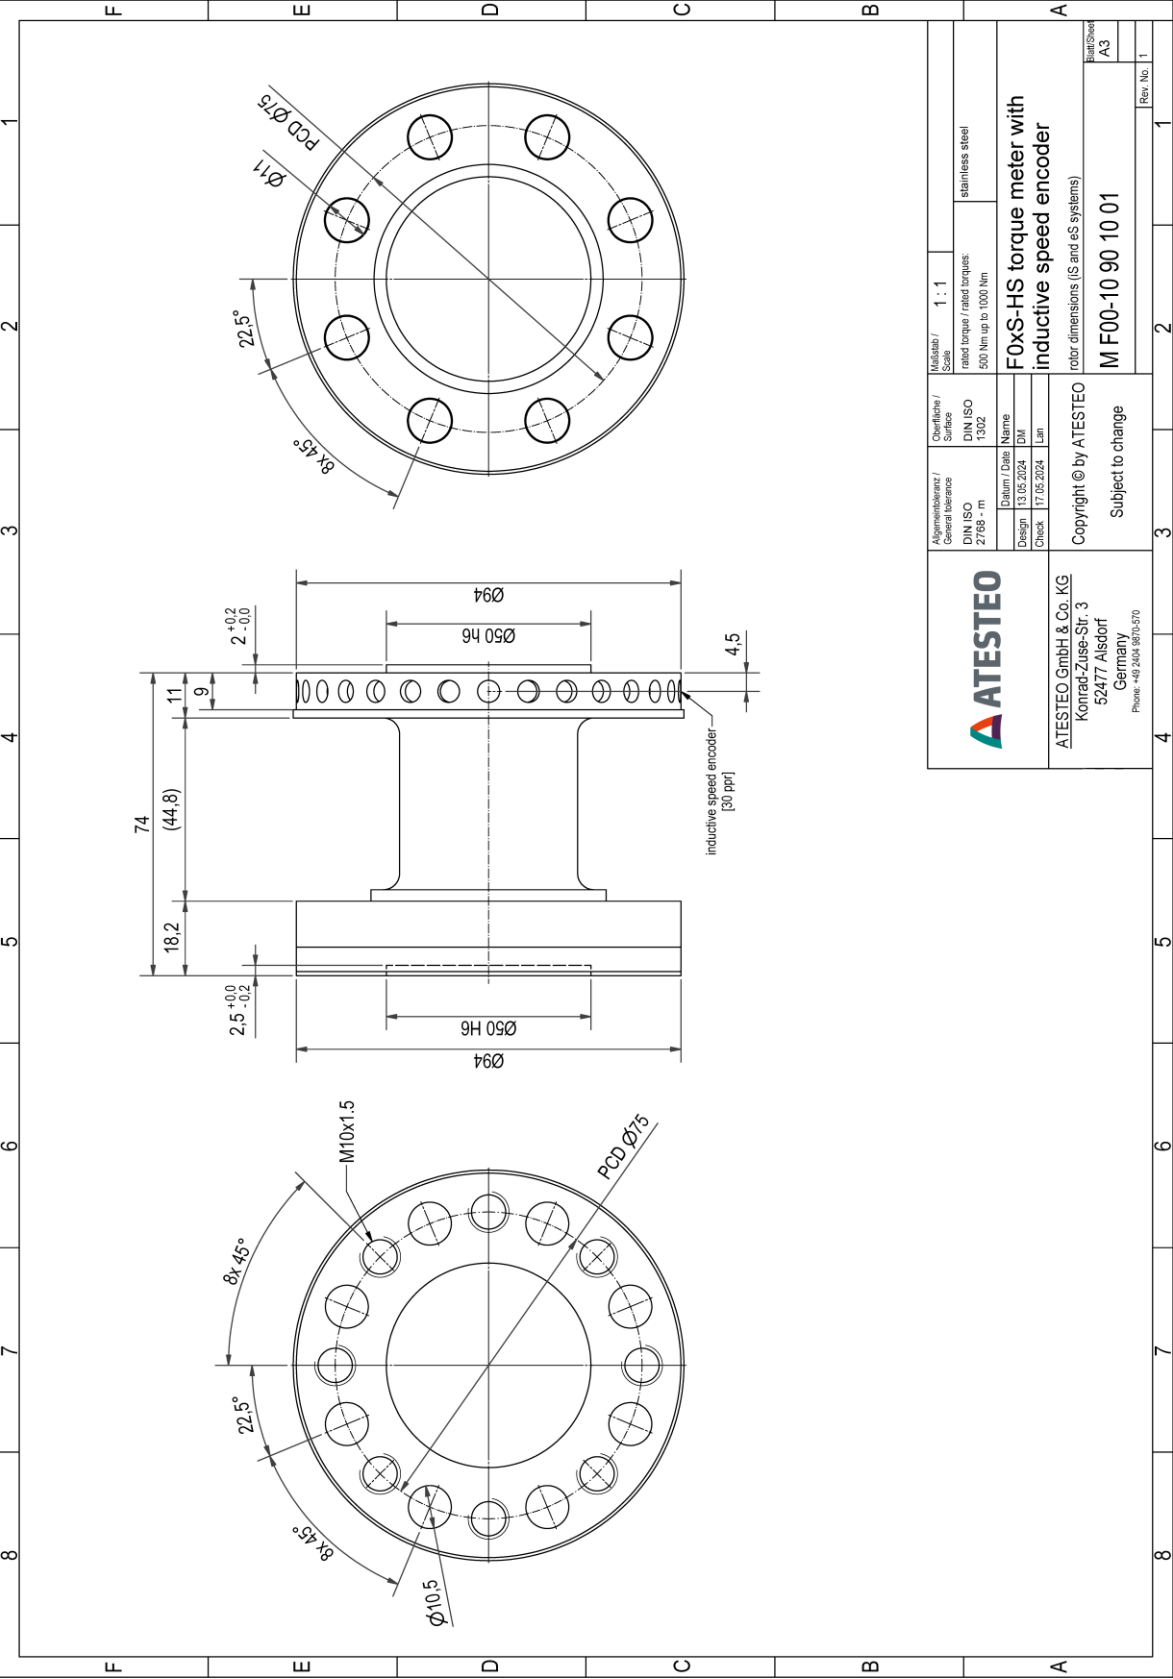

Drawing

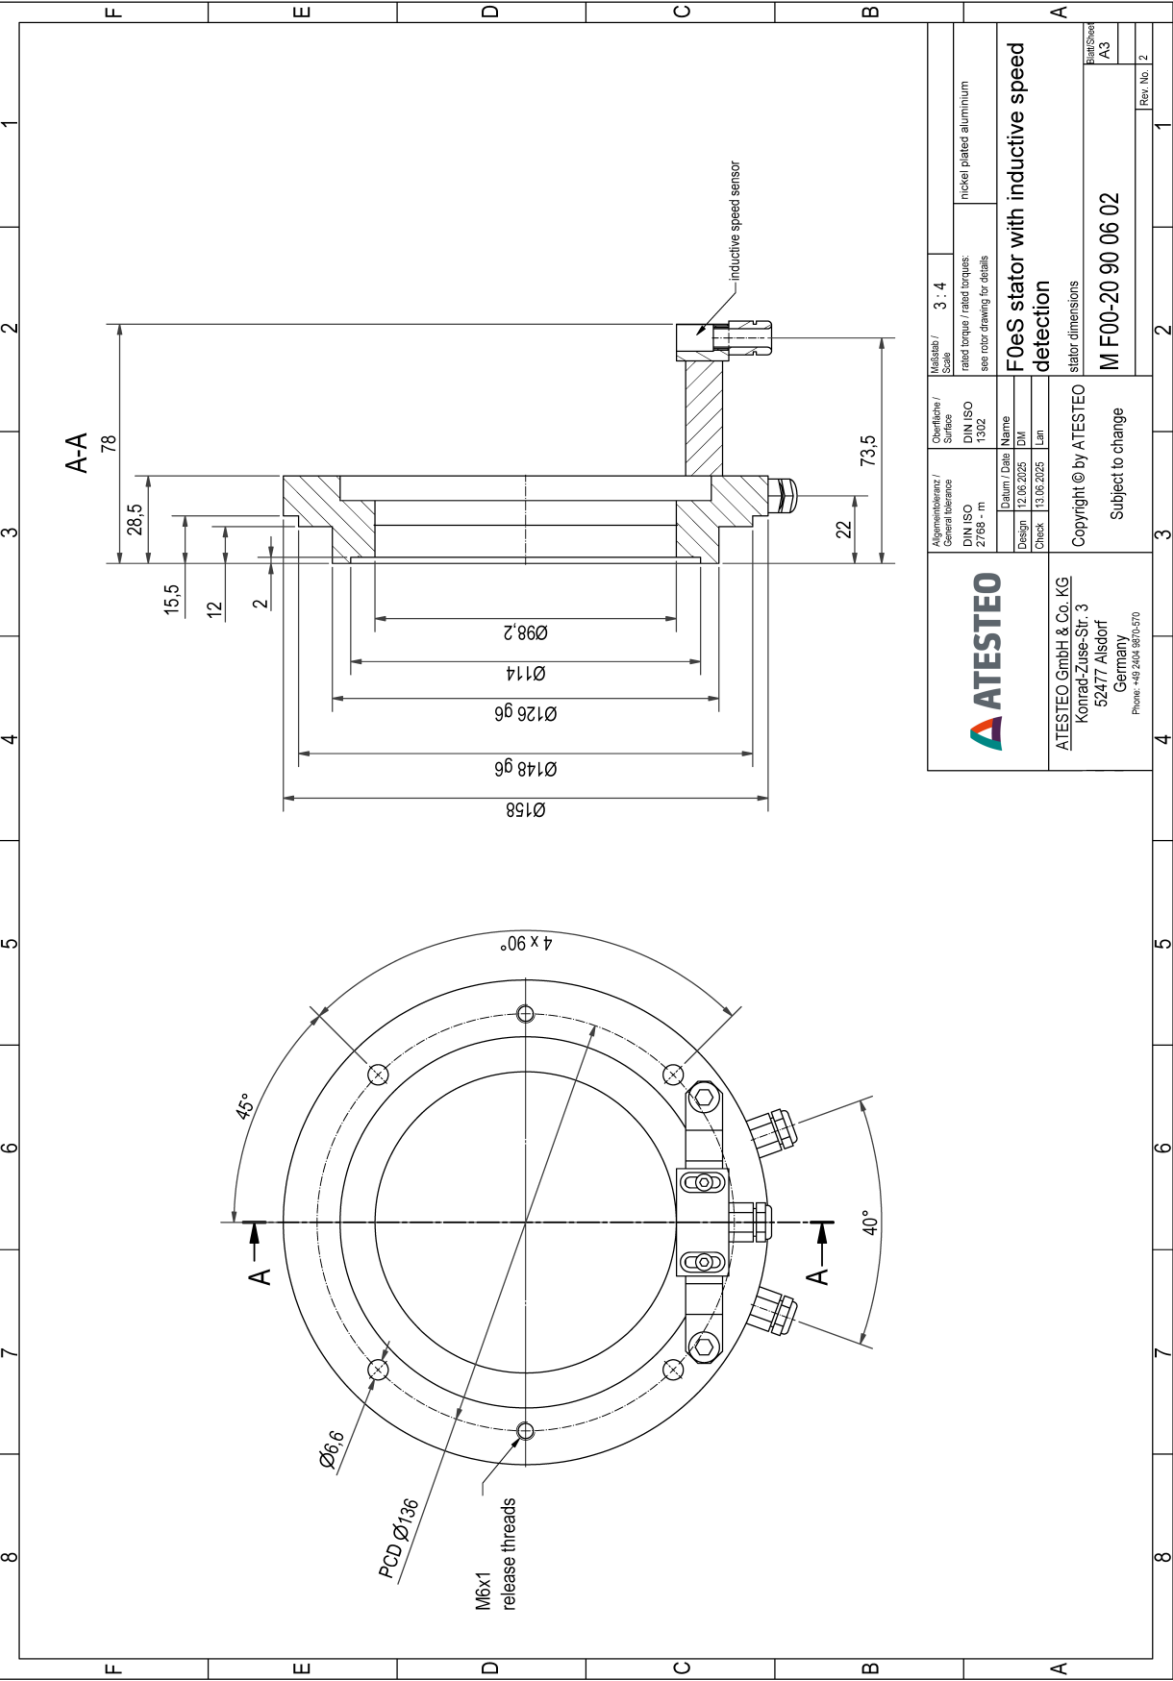


Drawing

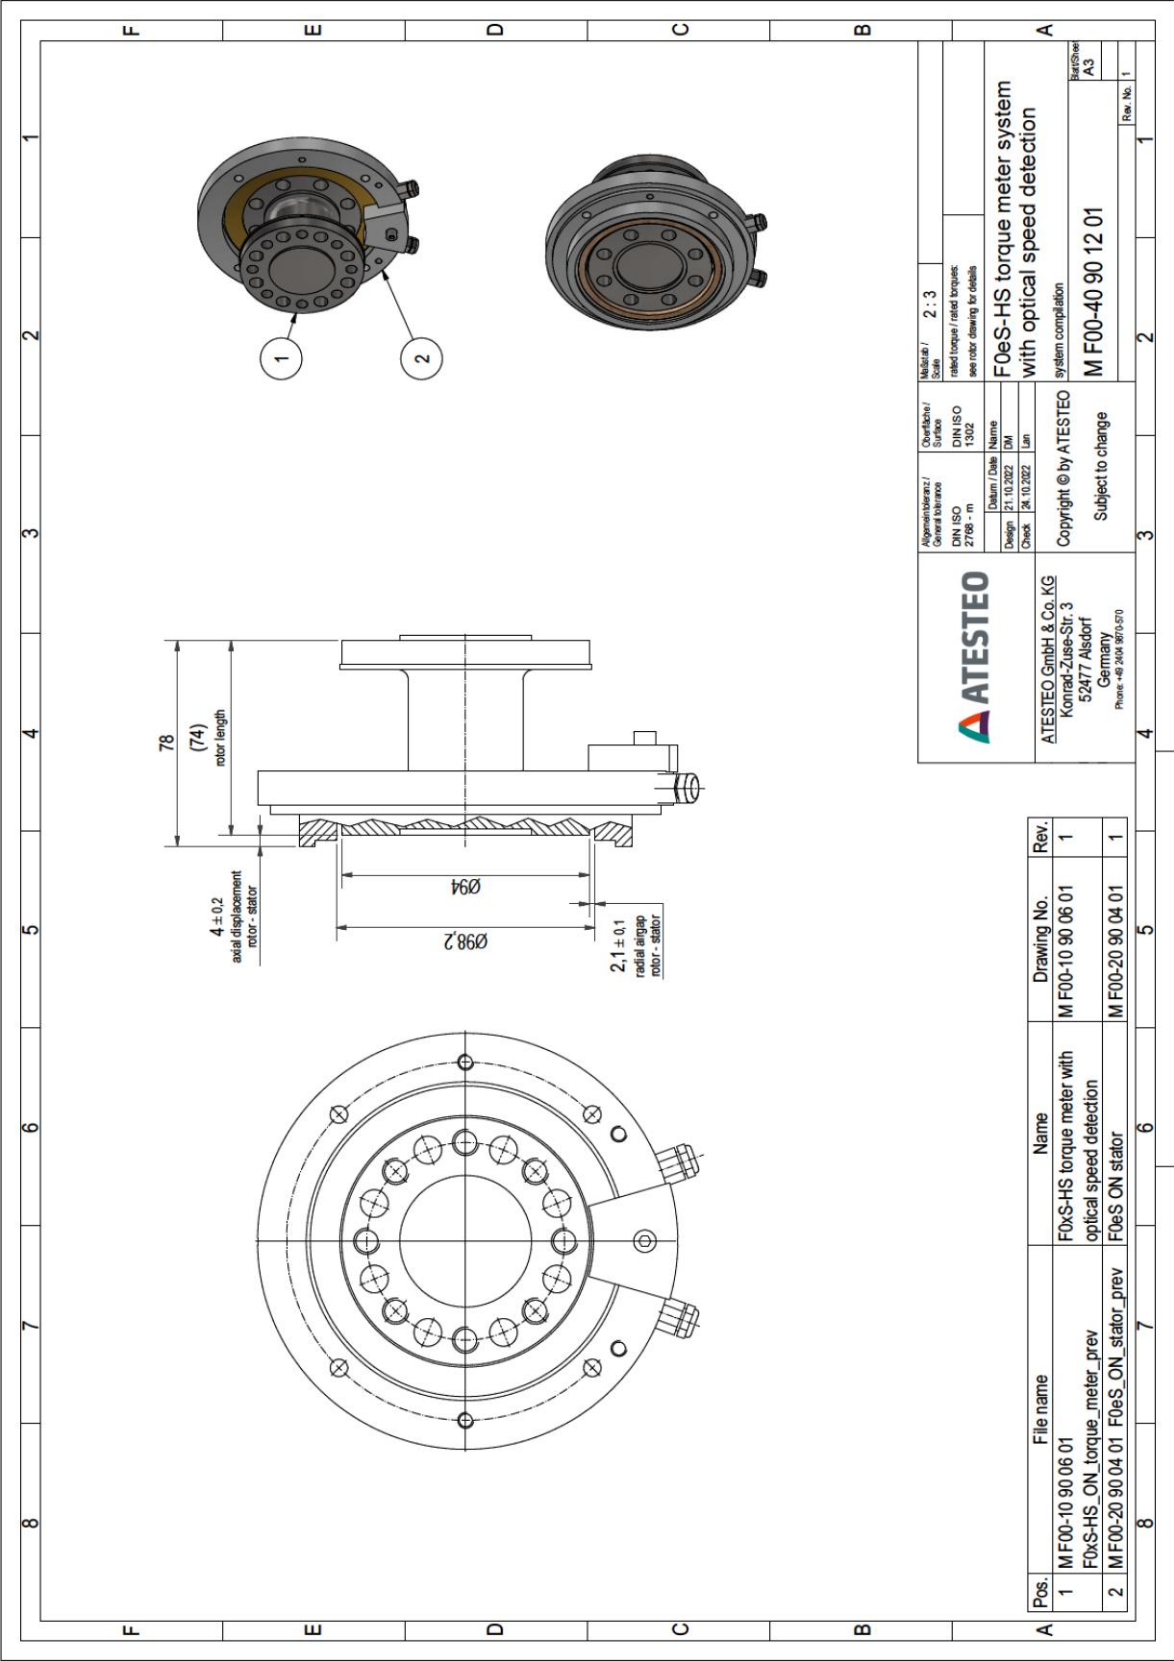



Drawing

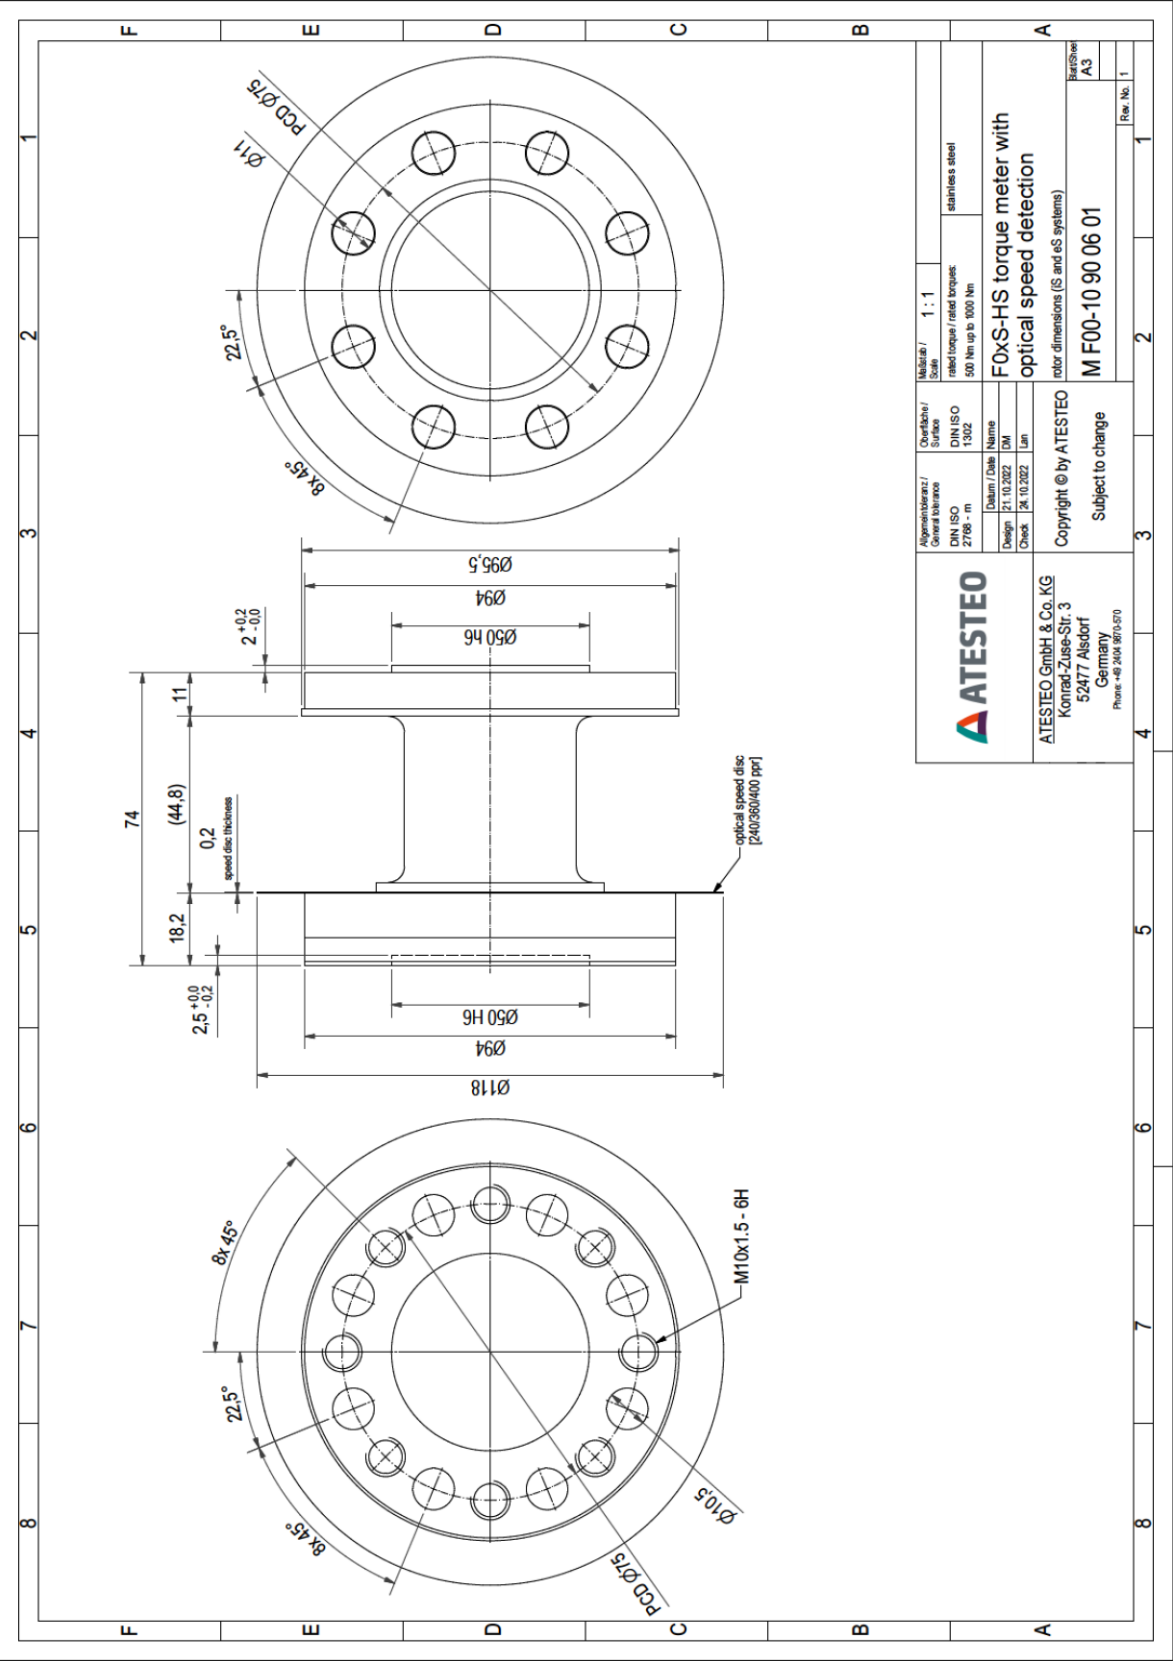



**Technical Drawing of a Motor Stator Assembly**


**Section A-A (Cross-section):**

- Overall width: 158 mm
- Stator core diameter:  $\varnothing 126$  mm
- Pole pitch: 148 mm
- Pole diameter:  $\varnothing 98.2$  mm
- Stator core thickness: 28.5 mm
- Pole thickness: 15.5 mm
- Stator core inner diameter: 12 mm
- Stator core outer diameter: 2 mm
- Stator core inner diameter: 22 mm
- Stator core outer diameter: 38.5 mm

**Top View:**

- Overall diameter:  $\varnothing 136$  mm
- Central bore diameter:  $\varnothing 86$  mm
- PCD (Pitch Circle Diameter):  $\varnothing 136$  mm
- Release threads: M6x1
- Optical speed detection module
- Angle: 40°
- Angle: 4 x 90°

Drawing

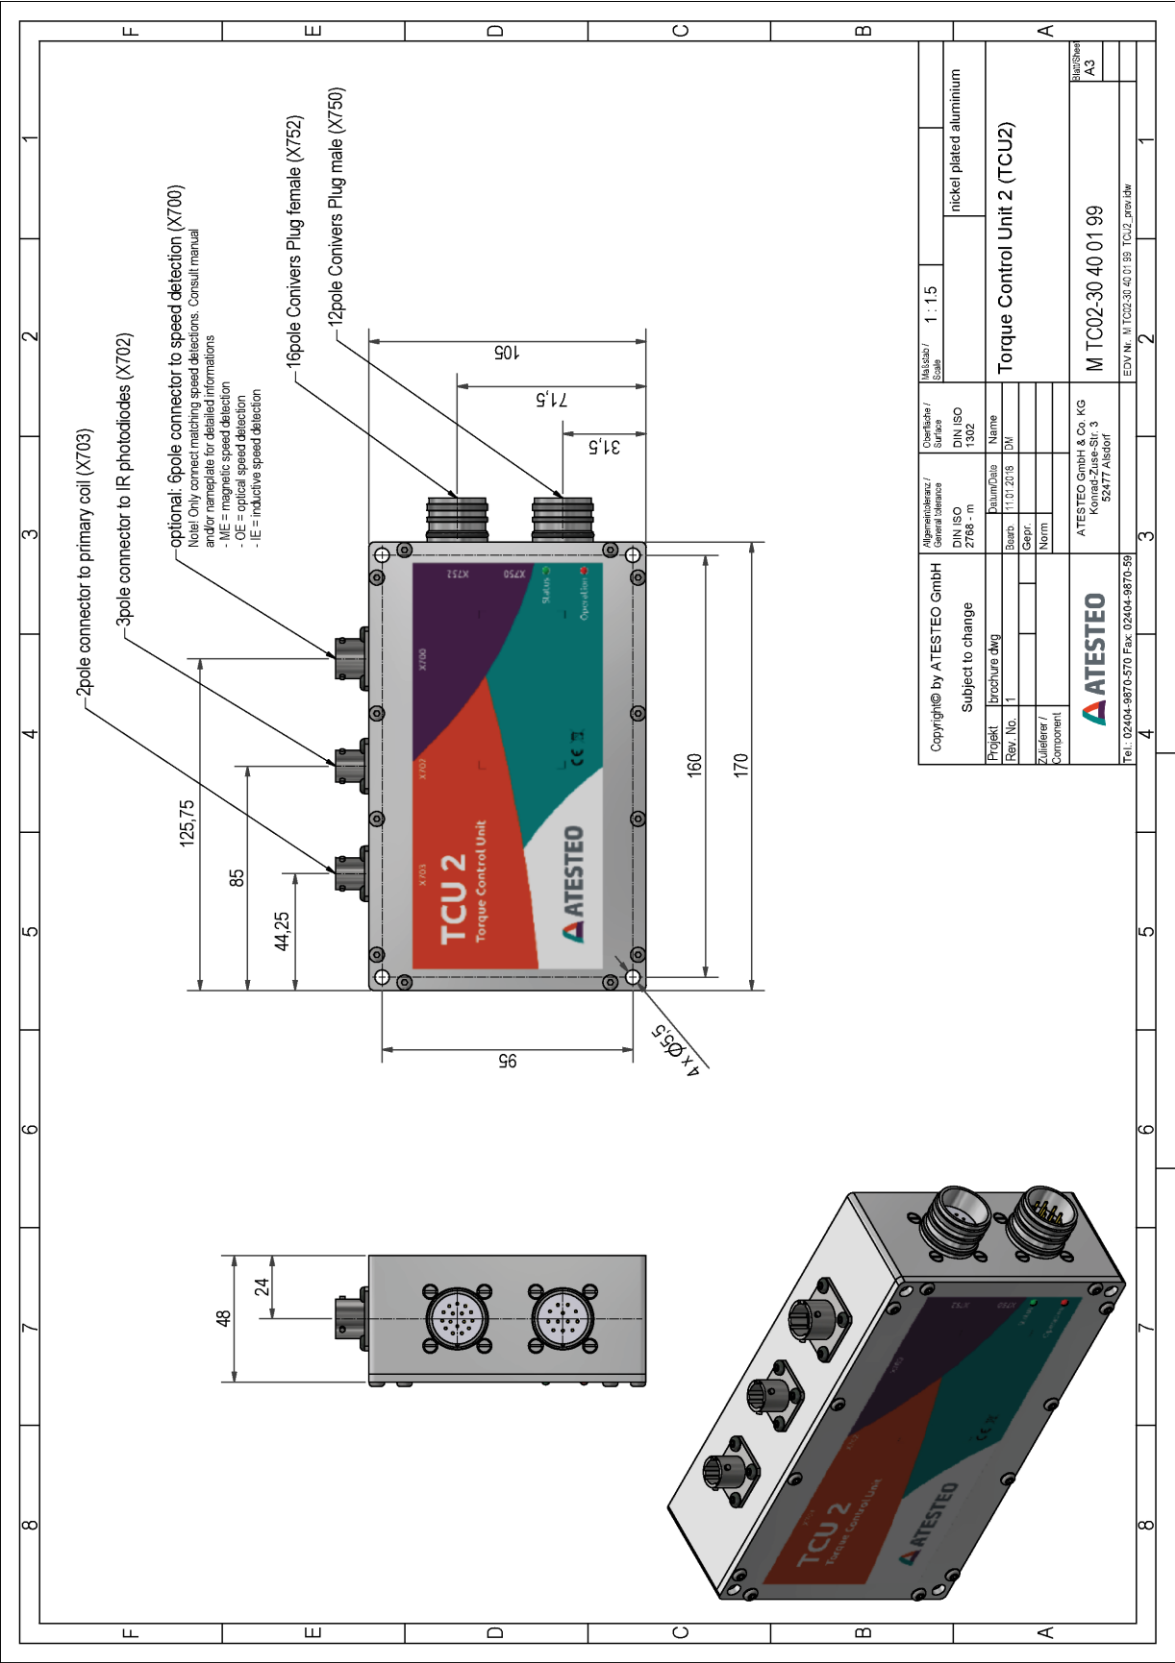

**Would you like to learn more about our products, solutions, and services in the area of measuring systems, vehicle equipment, and actuators? Just call us at +49 (0) 2404 9870 570 or send email to [equipment@atesteo.com](mailto:equipment@atesteo.com). Your personal ATESTEO contact would be pleased to assist you.**



ATESTEO GmbH & Co. KG  
Konrad-Zuse-Straße 3  
52477 Alsdorf  
Germany

|       |  |
|-------|--|
| Phone | +49 (0) 2404 9870 - 0                                  |
| Email | <a href="mailto:info@atesteo.com">info@atesteo.com</a> |

<https://www.atesteo.com/en/>