

- inclinomètre MEMS durci 1 ou 2 axes
- étendues de mesure: ± 5 , ± 10 , ± 15 , ± 30 , ± 60 ou $\pm 90^\circ$ (autres étendues en option)
- Précision : 0.03% de la pleine échelle
- Signal de sortie: 0-5V, 4-20mA, RS-232, RS-485, TTL, CANopen - Protocole série : ASCII ou Modbus
- résolution: 0.0005 à 0.001° selon version
- Boîtier Inox IP68, immergeable jusqu'à 50m.
- Tension d'alimentation : 9-36 VDC
- Température de fonctionnement: -40°C à $+85^\circ\text{C}$
- Limite de choc: 2000g
- Connectique : Connecteur M12 + Câble



Caractéristiques

Les inclinomètres de la série ACA sont conçus pour la mesure de l'inclinaison en environnement sévère, sur un ou deux axes, avec une très grande précision.

- **Haute précision et stabilité thermique :** Équipée d'un convertisseur A/N 24 bits et d'un algorithme de filtrage avancé, la série ACA bénéficie d'une compensation en température assurant une excellente stabilité et répétabilité, même en conditions extrêmes.
- **Nombreuses options de sortie :** Interfaces analogiques et numériques disponibles (RS485, RS232, Modbus, CANopen) pour une intégration simple et une transmission fiable des données.
- **Robustesse et étanchéité :** Conception en acier inoxydable avec excellente résistance à la corrosion. Équipée de joints d'étanchéité, la structure atteint un niveau de protection jusqu'à IP68, permettant une utilisation en environnements sévères, y compris en immersion jusqu'à 50 m.

Applications

- Surveillance de grue
- Engins de construction
- Tunneliers
- Maritime
- Contrôle d'assiette
- Réglage du niveau de machines outils

Spécifications

Version 4-20mA

ACA618T/628T-N	Conditions	Parameters				Unit	
Measure range		± 10	± 30	± 60	± 90	°	
Measure axis		X / XY	X / XY	X / XY	X / XY	axis	
Zero output	0° output	12	12	12	12	mA	
Resolution		0.0007	0.0007	0.0007	0.0007	°	
Measure accuracy	MAXE	Room temp.	0.003	0.01	0.02	0.03	°
	RMSE	Room temp.	0.003	0.003	0.005	0.008	°
Zero Temp. coefficient	$-40 \sim 85^\circ\text{C}$	0.0005	0.0005	0.0005	0.0005	°/°C	
Sensitivity temp-coefficient	$-40 \sim 85^\circ\text{C}$	≤ 50	≤ 50	≤ 50	≤ 50	ppm/°C	
Power on time		0.5	0.5	0.5	0.5	S	
Response frequency		20Hz					
EMC		According to EN61000 and GBT17626					
MTBF		≥ 98000 hours/times					
Insulation Resistance		$\geq 100\text{M}\Omega$					
Shockproof		100g@11ms, 3 axial direction (half sinusoid)					
Anti-vibration		10grms, 10 ~ 1000Hz					
Protection grade		IP68					
Cables		Standard 7 P * 6.8 mm aviation connector, 2m long, wear-resistant, wide temperature, shielded cable, cable weight ≤ 200 G					
Weight		$\leq 260\text{g}$ (without cable)					

Version CanOPEN

ACA2200T CANOPEN	CONDITIONS	PARAMETERS			UNIT
Measuring range		± 05	± 10	± 15	°
Measuring axis		X,Y	X,Y	X,Y	
Resolution		0.0005	0.0005	0.0005	°
Absolute accuracy	@25°C	0.003	0.005	0.006	°
Long term stability		0.002	0.003	0.005	°
Zero Temp. coefficient	$-40 \sim 85^\circ$	± 0.0002	± 0.0002	± 0.0002	°/°C
Sensitivity temp coefficient	$-40 \sim 85^\circ$	≤ 100	≤ 100	≤ 100	ppm/°C
Power on time		0.5	0.5	0.5	S
Response time		0.02	0.02	0.02	S
Output rate		5Hz, 15Hz, 35Hz, 50Hz can be setting			
Interface type		CAN OPEN			
EMC		According to EN61000 and GBT17626			
MTBF		≥ 50000 hours/times			
Insulation Resistance		$\geq 100\text{M}\Omega$			
Shockproof		100g@11ms, Triaxial (half sine wave)			
Anti-vibration		10grms, 10 ~ 1000Hz			
Protection grade		IP68			
Cables		Standard configuration: 2m length, wear-resistant, wide temperature, shielded cable 5P * 5.7mm aviation connector			
Weight		386g(without cable)			

* The parameters table only specify values for $\pm 10^\circ$, $\pm 30^\circ$, $\pm 60^\circ$, $\pm 90^\circ$, Any other range within $\pm 180^\circ$ (single axis), $\pm 90^\circ$ (dual axis) is available as well.

Spécifications

Version RS-232/485

ACA616T&ACA626T	condition	Parameters				Unit
Measuring range		± 10	± 30	± 60	± 90	°
Measuring axis		X/XY	X/XY	X/XY	X/XY	
Resolution		0.001	0.001	0.001	0.001	°
Absolute accuracy	@25°C	0.003	0.01	0.02	0.03	°
Long term stability		0.01	0.02	0.03	0.04	°
Zero temperature coefficient	-40 ~ 85°	± 0.0004	± 0.0004	± 0.0004	± 0.0004	°/°C
Sensitivity temperature coefficient	-40 ~ 85°	≤ 50	≤ 50	≤ 50	≤ 100	ppm/°C
Power on time		0.5	0.5	0.5	0.5	S
Response time		0.02	0.02	0.02	0.02	S
Output rate		5Hz, 15Hz, 35Hz, 50Hz can set				
Output signal response Frequency		RS232/RS485/RS422/TTL/CAN				
Electromagnetic compatibility		According to EN61000 and GBT17626				
MTBF		≥ 50000 hours / times				
Insulation Resistance		≥ 100 Megohm				
Shockproof		100g@11ms, Triaxial (half sine wave)				
Anti-vibration		10grms, 10 ~ 1000Hz				
Protection glass		IP68				
Cables		Standard 2m length, wear-resistant, wide temperature, shielded cable 5P * 5.7mm aviation connector				
Weight		235g(without cable)				

This performance parameter only lists $\pm 10^\circ$, $\pm 30^\circ$, $\pm 60^\circ$, $\pm 90^\circ$ series as a reference, for other measurement ranges, please refer to the nearest neighbor parameter.

Version RS-232/485 haute précision

ACA2400T	CONDITIONS	PARAMETERS			UNIT
Measuring range		± 05	± 10	± 15	°
Measuring axis		X,Y	X,Y	X,Y	
Resolution		0.0005	0.0005	0.0005	°
Absolute accuracy	@25°C	0.003	0.005	0.006	°
Long term stability		0.002	0.003	0.005	°
Zero Temp. coefficient	-40 ~ 85°	± 0.0002	± 0.0002	± 0.0002	°/°C
Sensitivity temp coefficient	-40 ~ 85°	≤ 50	≤ 50	≤ 50	ppm/°C
Power on time		0.5	0.5	0.5	S
Response time		0.005	0.005	0.005	S
Output rate		5Hz, 15Hz, 35Hz, 50Hz can be setting			
Interface type		RS232/RS485/RS422/TTL			
EMC		According to EN61000 and GBT17626			
MTBF		≥ 50000 hours/times			
Insulation Resistance		≥ 100 MQ			
Shockproof		100g@11ms, Triaxial (half sine wave)			
Anti-vibration		10grms, 10 ~ 1000Hz			
Protection grade		IP68			
Cables		Standard configuration: 2m length, wear-resistant, wide temperature, shielded cable 5P * 5.7mm aviation connector			
Weight		386g(without cable)			

* The parameters table only specify values for $\pm 10^\circ$, $\pm 30^\circ$, $\pm 60^\circ$, $\pm 90^\circ$ series as a reference, for other measurement ranges, please refer to the nearest neighbor parameter.



Spécifications électriques

parameter	condition	Min	Standard	Max	Unit
Power supply	Standard	9	12, 24	36	V
	customized		Other voltage		V
	12V		40		mA
	24V		22		mA
Working current		-40		+85	°C
Working temperature		-55		+100	°C

Key words :

- Resolution:** Refers to the sensor in measuring range to detect and identify the smallest changed value.
- Absolute accuracy:** Refers to in the normal temperature circumstances, the sensor absolute linearity, repeatability, hysteresis, zero deviation, and transverse error comprehensive error.
- Long term stability:** Refers to the sensors in normal temperature conditions, the deviation between the maximum and minimum values after a year's long time work.
- Response time:** Refers to the sensor in an angle change, the sensor output value reached the standard time required.


Dimensions

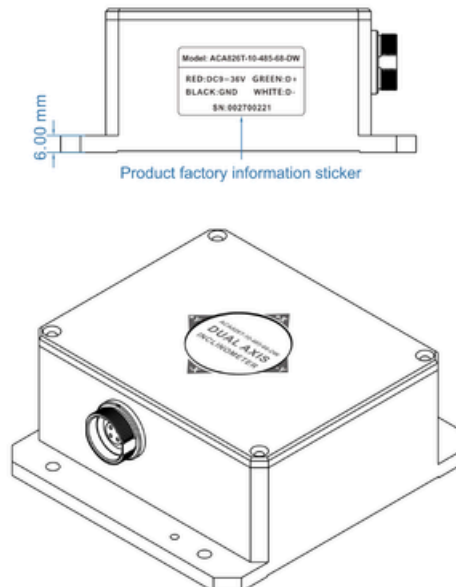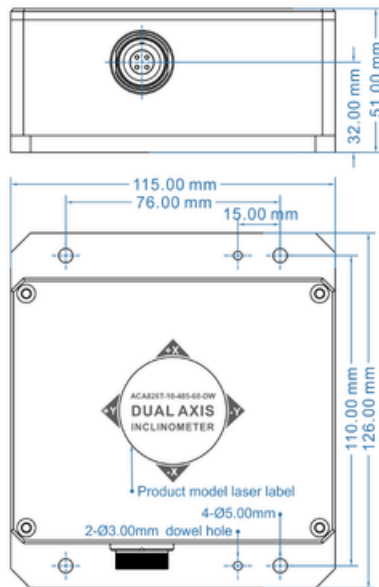

Shell size: L115xW126xH51mm
Installation size: L76xW110H6mm


Configuration, options

Version 4-20 mA

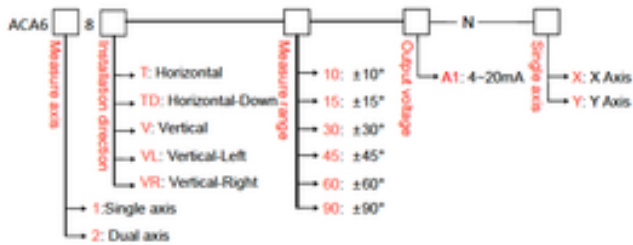

E.g ACA618T-10-A1-N-X: Single axis/Horizontal installation / $\pm 10^\circ$ Measure range/4-20mA output current/X Axis.

Version CAN ou CANopen

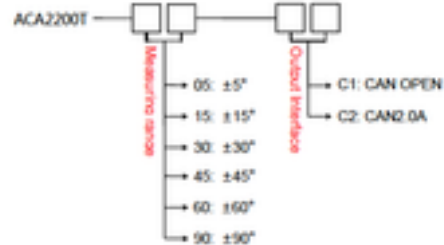


E.g : ACA2200T-05-C1 : $\pm 5^\circ$ Measuring range / CANOPEN interface output.

Version RS-232/485 - standard

Example product code: **ACA 6 2 6 T 02 422 MB-NC**


Model	ACA
Series	6
Number of axes	2 = Dual Axis
Output	6 = Digital
Orientation	T = Horizontal
Range	02, 03, 05, 10, 15, 30 (other ranges by request)
Output	422 = RS422
Protocol	MB = MODBUS protocol
Connector	NC = 5 pin Male M12 connector (Standard)

Version RS-232/485 - haute précision

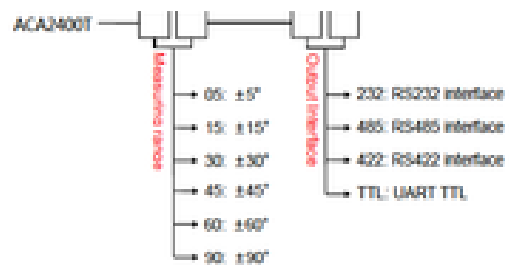


E.g : ACA2000T-05-232 : Dual axis / $\pm 5^\circ$ Measuring range / RS232 interface output.

Dimensions

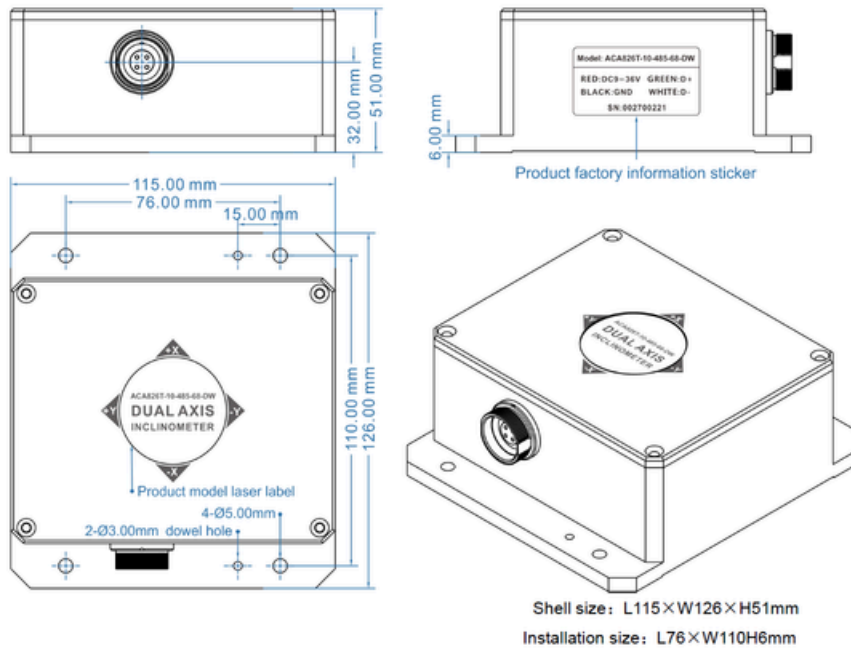


Câblage

Version 4-20 mA

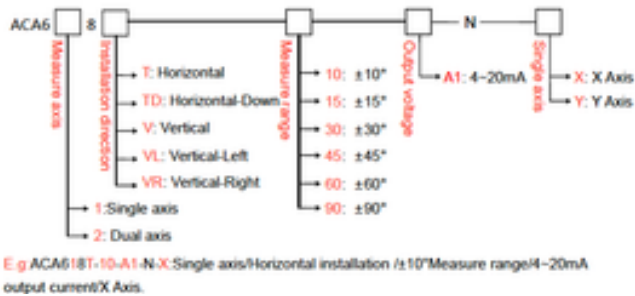

Version CAN ou CANopen

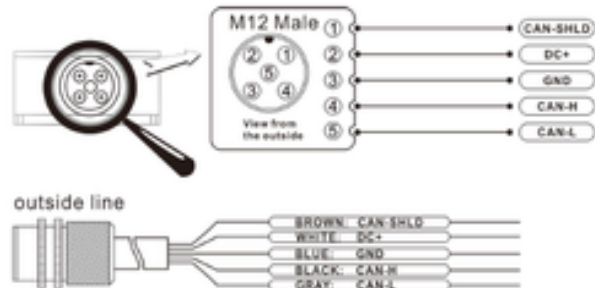

Version RS-232

1 : RS232 cable wire information


Line Color information	BLACK	WHITE	BLUE	BROWN	GRAY
GND	GND	RS232(RXD)	RS232(TXD)	DC9-36V Power supply positive	FACTORY Using





Version RS-485

2 : RS485 cable wire information

Line color information	BLACK	WHITE	BLUE	BROWN	GRAY
GND	GND	RS485(D+)	RS485(D-)	DC9-36V Power supply positive	FACTORY Using only

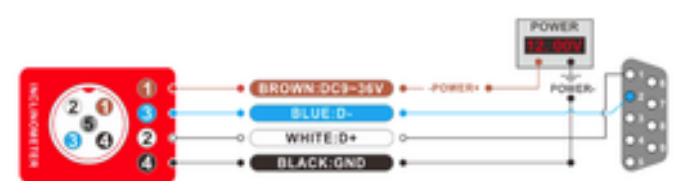


Installation

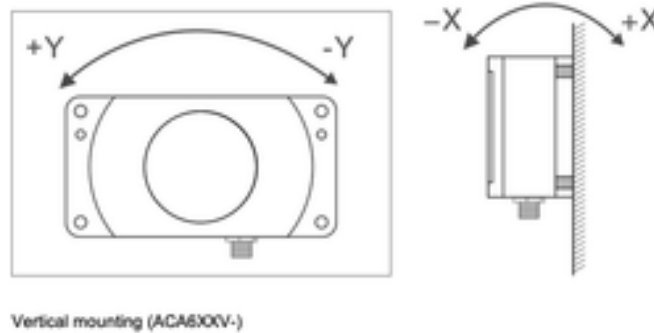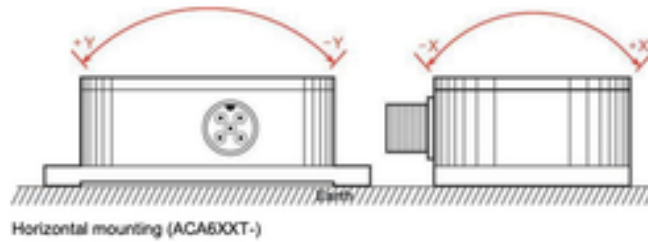


Câblage

Version 4-20 mA

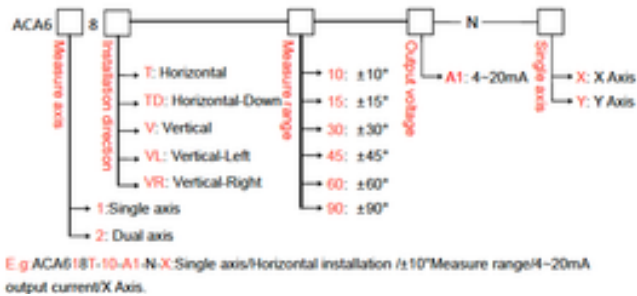


Version CAN ou CANopen

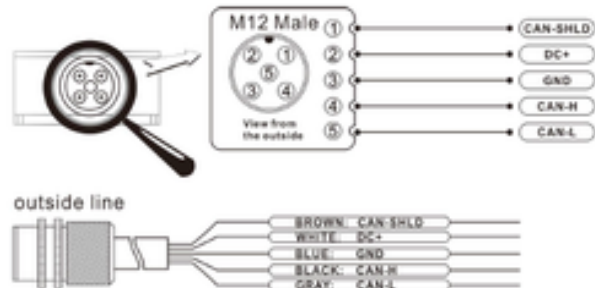

Version RS-232

1 : RS232 cable wire information

Line Color information	BLACK	WHITE	BLUE	BROWN	GRAY
GND	GND	RS232(RXD)	RS232(TXD)	DC9-36V Power supply positive	FACTORY Using

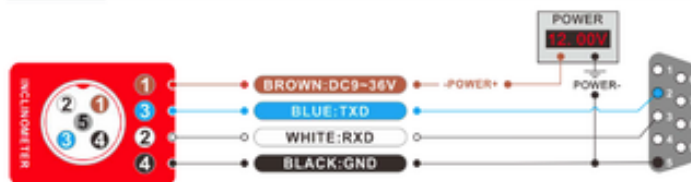

Version RS-485

2 : RS485 cable wire information

Line color information	BLACK	WHITE	BLUE	BROWN	GRAY
GND	GND	RS485(D+)	RS485(D-)	DC9-36V Power supply positive	FACTORY Using only

