# **Split Collar Telemetry & Induction System**

### Model TEL-SC

- Split Collar Hoop has built in telemetry & induction power system
- Hoops can be made to fit shafts with diameters of 0.9" (23mm) and larger
- Digital wireless link provides accurate error free data transmission
- Integrated strain gage or thermocouple drivers
  with differential amplifiers
- · Low profile design
- Single or multiple channels available



### Description

The *Split Collar Telemetry and Induction System* is a reliable, convenient, and accurate way to get signals off of rotating shafts. *TEL-SC* is a non-contact system that allows the users to remove the system without modifying or disassembling larger shaft ends. The *TEL-SC* has all the long term testing advantages of an induction system without having to make a custom induction system for each shaft. The *TEL-SC* can be moved and mounted to different shaft of the same diameter or smaller with the use of bushings.

The *TEL-SC* can be made to fit a wide variety of shafts. It can fit larger diameter drive shaft and small diameter half shafts. It has a slim profile, with a radial thickness as small as 0.475".

The *TEL-SC* can be purchased in conjunction with Michigan Scientific's strain gage and calibration services, or alone to accompany customer installed sensors.

The *TEL-SC* utilizes Michigan Scientific's M-320 Series Digital Telemetry. Split Collar Hoops below 3" in diameter are limited to 3 channels. Larger Split Collar hoops can incorporate up to 12 channels.

8500 Ance Road Charlevoix, MI 49720 Tel: 231-547-5511 Fax: 231-547-7070 4/13/13


http://www.michsci.com Email: mscinfo@michsci.com

SCIENTIFIC corporation

321 East Huron Street Milford, MI 48381 Tel: 248-685-3939 Fax: 248-684-5406

# **Split Collar Telemetry & Induction System**

### **Application Examples**

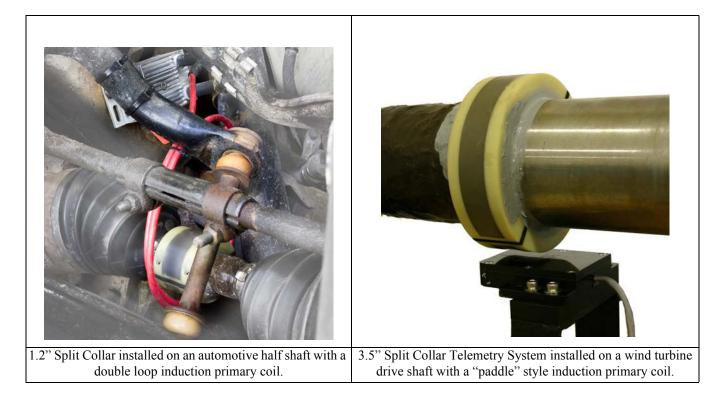

8500 Ance Road Charlevoix, MI 49720 Tel: 231-547-5511 Fax: 231-547-7070 4/13/13

http://www.michsci.com Email: mscinfo@michsci.com

C1



321 East Huron Street Milford, MI 48381 Tel: 248-685-3939 Fax: 248-684-5406