

PΔ Ratiometric Voltage Output



Analog absolute positioning

Utilizing a precision potentiometer, the UniMeasure PA series position transducer provides basic absolute positioning with an analog output. With a steady state input voltage and with the potentiometer connected as a voltage divider, the ratiometric output voltage is directly proportional to wire rope extension. The unit will function with any input voltage up to 25 volts maximum. To obtain best output linearity, the input voltage should be well regulated.




SPECIFICATIONS

| GENERAL | |
|----------------------------------|-----------------------------------|
| Linearity | |
| 2", 3", 4" & 5" Ranges | ±0.25% Full Scale |
| 10", 15", 20" & 25" Ranges | ±0.15% Full Scale |
| All other ranges | ±0.10% Full Scale |
| Repeatability[1] | ±0.015% Full Scale |
| Resolution | Essentially Infinite |
| Construction | Aluminum Cover & Baseplate |
| Sensing Device | Precision Potentiometer |
| Connector | MS3102A-14S-6P |
| Wire Rope | Ø.016 Stainless Steel |
| Wire Rope Tension | See Supplemental Data[2], Table 1 |
| Wire Rope Inbound Acceleration . | See Supplemental Data[2], Table 1 |
| Weight | |
| Up to 50" | 1.0 lb. (0.45 Kg) |
| 60" & 80" | |
| Dimensional Information | See Supplemental Data [2], Fig. 1 |
| Options and Accessories | See Supplemental Data [2] |
| ELECTRICAL | |
| Input Impedance | 1000Ω ±10% |
| Output Impedance | |
| Excitation Voltage | 30 Volts Max. AC or DC |
| Output Voltage Change Over | |
| Full Range of Transducer | 92% to 98% of Excitation Voltage |
| - | - |

ENVIRONMENTAL

| Thermal Coefficient of Sensing Element | ±100 PPM/°C max. |
|--|--------------------------------|
| Operating temperature | 40°C to +95°C |
| Operating humidity | . 95% R.H. max. non-condensing |
| Vibration | . 15 G's 0.1 ms max. |
| Shock | . 50 G's 0.1 ms max. |
| Ingress Protection | . NEMA 1. IP-40 |



& 2

FOOTNOTES TO SPECIFICATIONS

1. Moving to the same position from the same direction.


2. Supplemental Data section locate at end of Standard Series pages.


MODEL NUMBER CONFIGURATION



WIRE ROPE

BASIC CONFIGURATION (FOR ALL RANGES) PA-50-S10-N1S-10C







Stainless Steel


..Ø.016 (0,4 mm) Stainless Steel

.Ø.018 (0,45 mm) Nylon Jacketed



as wire rope is extended)







| | _ | |
|--|---|-----------|
| | | 13 |
| | _ | |

| Ranges 2" to 5" | 5,000,000 full stroke cycles |
|-------------------|------------------------------|
| Ranges 10" to 25" | 500,000 full stroke cycles |
| Ranges 30" to 80" | 250,000 full stroke cycles |


^{*}With 1K ohm potentiometer, wire rope misalignment 2° maximum at full stroke, relatively dust free environment, and with nylon jacketed wire rope

OPTION DESCRIPTIONS


| OPTION | OPTION DESIGNATOR | DESCRIPTION | | | | | | | |
|-----------------------------|----------------------|---|--|--|--|--|--|--|--|
| WIRE ROPE | | Replaces standard stainless steel wire rope with Ø.018 nylon jacketed | | | | | | | |
| Nylon jacketed wire rope | N | wire rope. Increases wire rope life dramatically but may increase non-linearity by as much as $\pm 0.05\%$ of full scale. | | | | | | | |
| WIRE ROPE TENSION | 0 | Reduces the overall tension in the wire rope and increases wire rope | | | | | | | |
| Reduced Wire Rope Tension | 2 | life. Dynamic response of the transducer is reduced due to the reduced inbound acceleration capability. | | | | | | | |
| Increased Wire Rope Tension | 3 | Increases tension in the wire rope which increases the dynamic response of the transducer. On selected units with range of 50" (1250 mm) or less, inbound acceleration capability is 100G's. Wire rope life may be adversely affected by the HG option. | | | | | | | |
| DUST WIPER | D | Lubricated wiper strips dust and debris from wire rope as it retracts into case. Adds 0.36" (9 mm) height to wire rope exit location. | | | | | | | |
| POTENTIOMETER VALUE | | Non-standard potentiometer linearity is as follows: | | | | | | | |
| | | RANGE LINEARITY | | | | | | | |
| Non-standard potentiometer | 2,3,4 | 5" and Below | | | | | | | |
| (applies to PA series only) | | 30" and above ±0.25% of full scale | | | | | | | |
| | | Note: This option is subject to potentiometer availability. | | | | | | | |
| ELECTRICAL OUTPUT POLARITY | R | Output is at a maximum when wire rope is fully retracted. Output decreases | | | | | | | |
| Reversed output | n | as wire rope is extended. Does not apply to velocity or encoder signal. | | | | | | | |
| ELECTRICAL INTERFACE | т | Replaces connector with a terminal strip. | | | | | | | |
| Terminal strip | | | | | | | | | |

10067 - Auxiliary Wire Rope Extension Kit

The auxiliary wire rope extension may be used to facilitate mounting the transducer remotely from the measurement point. The clip on the extension attaches to the eye fitting on the transducer. The eye fitting on the opposite end, which is identical to the fitting on the transducer, mounts to the moving element. The extension kit is also available with the clip end unterminated for situations where it is more convenient to size the wire rope length during installation. Clip and crimp fitting are included with the unterminated version.



10067- - CM- - 0



2 UNTERMINATED CLIP END

Leave Blank..... Completed kit (No designator required)

U........Unterminated Clip End
(clip and crimp sleeve included in kit)

REPLACEMENT WIRE ROPE KITS

The replacement Wire Rope Kit includes a new wire rope with all end terminations, wire rope guide, felt dust wiper where applicable and installation instructions. To order, replace 'xx' in the part number with the applicable measurement range in inches.

- 10107-xx Replacement Wire Rope Kit—Standard Ø.016" Stainless Steel Wire Rope.
- **10108-xx** Replacement Wire Rope Kit—Ø.018" Nylon Jacketed Stainless Steel Wire Rope.
- 10127-xx Replacement Wire Rope Kit—Standard Ø.016" Stainless Steel Wire Rope with Dust Wiper.
- 10128-xx Replacement Wire Rope Kit—Ø.018" Nylon Jacketed Stainless Steel Wire Rope with Dust Wiper.



ADDITIONAL OPTIONS

TABLE 7


| PA, PB, P420 & P510 Series | | | | | | | ı | ERIES | V & VP SERIES | | | | | | |
|----------------------------|------|------|----------------------------------|-----|---------------------------------------|-----------|-----|--------------------------------------|---------------------------------|-----|-----------------|------|---------------------------------|-------|--------------------------------------|
| Range Designatator | Ra | nge | Wire Rope Standard Tension | | Wire Rope Standard Acceleration | d Reduced | | Wire Rope Reduced Acceleration | Wire Rope Reduced Tension | | Reduced Reduced | | Wire Rope Reduced Tension | | Wire Rope Reduced Acceleration |
| | (in) | (mm) | (oz) | (N) | (G's) | (oz) | (N) | (G's) | (oz) | (N) | (G's) | (oz) | (N) | (G's) | |
| 2 | 2 | 50 | 34 | 9.5 | >50 | 16 | 4.4 | 28 | _ | | _ | 16 | 4.4 | 14 | |
| 3 | 3 | 75 | 24 | 6.7 | >50 | 14 | 3.9 | 16 | - | | _ | 14 | 3.9 | 15 | |
| 4 | 4 | 100 | 24 | 6.7 | >50 | 11 | 3.1 | 12 | - | | _ | 11 | 3.1 | 15 | |
| 5 | 5 | 125 | 34 | 9.5 | >50 | 8 | 2.2 | 7 | - | | _ | 8 | 2.2 | 6 | |
| 10 | 10 | 250 | 34 | 9.5 | >50 | 16 | 4.4 | 28 | 16 | 4.4 | 19 | 16 | 4.4 | 14 | |
| 15 | 15 | 390 | 24 | 6.7 | >50 | 14 | 3.9 | 16 | - | | _ | 14 | 3.9 | 15 | |
| 20 | 20 | 500 | 24 | 6.7 | >50 | 11 | 3.1 | 12 | _ | | _ | 11 | 3.1 | 14 | |
| 25 | 25 | 640 | 34 | 9.5 | >50 | 8 | 2.2 | 7 | 8 | 2.2 | 7 | 8 | 2.2 | 6 | |
| 30 | 30 | 750 | 24 | 6.7 | >50 | 14 | 3.9 | 16 | - | | _ | 14 | 3.9 | 15 | |
| 40 | 40 | 1000 | 24 | 6.7 | >50 | 11 | 3.1 | 12 | - | | _ | 11 | 3.1 | 12 | |
| 50 | 50 | 1250 | 34 | 9.5 | >50 | 8 | 2.2 | 7 | 8 | 2.2 | 7 | 8 | 2.2 | 5 | |
| 60 | 60 | 1500 | 24 | 6.7 | 27 | 7 | 1.8 | 2 | 7 | 1.8 | 5 | 7 | 1.8 | 6 | |
| 80 | 80 | 2000 | 19 | 5.3 | 16 | 5 | 1.4 | 2 | 5 | 1.4 | 2 | 5 | 1.4 | 3 | |

DIMENSIONAL INFORMATION

5", 25", 50"

60"

STANDARD SERIES PA, PB, P420, P510, EP & V SERIES

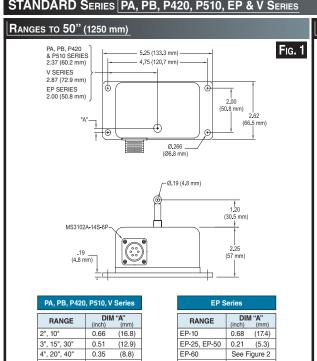

(4.8)

See Figure 2

See Figure 2

EP-80

EPM-250

EPM-1250

See Figure 2

0.68 (17.4)

(5.3)

0.21

