


## MODEL EKL

### TECHNICAL SPECIFICATIONS

### Compact version

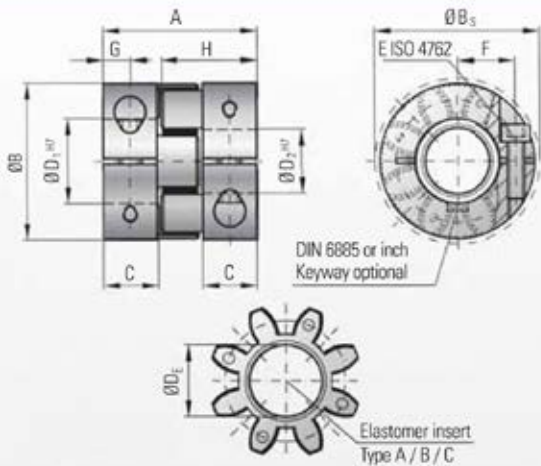

#### Properties:

- short compact design
- easy assembly
- vibration dampening
- electrically insulating
- backlash-free
- press-fit design

#### Material:

Clamping hub: up to series 450 high strength aluminum, from series 800 and up steel  
Elastomer insert: precision molded, wear resistant, and thermally stable polymer

#### Design:

Two coupling hubs are concentrically machined with concave driving jaws

#### \*Speeds:

Over 4.000 rpm a finely balanced version is available

#### Tolerance:

On the hub/shaft connection 0,01 to 0,05 mm

Model EKL	Series																										
	2			5			10			20			60			150			300			450			800		
Type (Elastomer insert)	A	B	C	A	B	C	A	B	C	A	B	C	A	B	C	A	B	C	A	B	C	A	B	C	A	B	C
Rated torque (Nm) $T_{EN}$	2	2.4	0.5	9	12	2	12.5	16	4	17	21	6	60	75	20	160	200	42	325	405	84	530	660	95	950	1100	240
Max. torque** (Nm) $T_{Emax}$	4	4.8	1	18	24	4	25	32	6	34	42	12	120	150	35	320	400	85	650	810	170	1060	1350	190	1900	2150	400
Overall length (mm) A	20			26			32			50			58			62			86			94			123		
Outer diameter (mm) B	16			25			32			42			56			66.5			82			102			136.5		
Outer diameter with screwhead (mm) $B_5$	17			25			32			44.5			57			68			85			105			139		
Mounting length (mm) C	6			8			10.3			17			20			21			31			34			46		
Inner diameter range H7 (mm) $D_{H7}$	3 - 8			4 - 12.7			4 - 16			8 - 25			12 - 32			19 - 36			20 - 45			29 - 60			35 - 80		
Inner diameter max. (elastomer) (mm) $D_1$	6.2			10.2			14.2			19.2			27.2			30.2			38.2			46.2			60.5		
Mounting Screw (ISO 4762/12.9)	M2			M3			M4			M5			M6			M8			M10			M12			M16		
Tightening torque of the mounting screw (Nm) E	0.6			2			4			8			15			35			70			120			290		
Distance between centers (mm) F	5.5			8			10.5			15.5			21			24			29			38			50.5		
Distance (mm) G	3			4			5			8.5			10			11			15			17.5			23		
Hub length (mm) H	12			16.7			20.7			31			36			39			52			57			74		
Moment of inertia ( $10^{-3}$ kgm <sup>2</sup> ) $J_1/J_2$	0.0003			0.001			0.01			0.01			0.06			0.15			0.4			1.3			7.8		
Approx. weight (kg)	0.008			0.02			0.05			0.12			0.3			0.5			0.9			1.5			8.5		
Speed* (rpm)	28.000			22.000			20.000			19.000			14.000			11.500			9.500			8.000			4.000		

1 Nm = 8.85 in lbs

\*\* Maximum transferable torque of the clamping hub depends on the bore diameters (bore/shaft clearance 0.01 mm to 0.05 mm shaft oiled)

Series	Ø 3	Ø 4	Ø 5	Ø 8	Ø 16	Ø 19	Ø 25	Ø 30	Ø 32	Ø 35	Ø 45	Ø 50	Ø 55	Ø 60	Ø 65	Ø 70	Ø 75	Ø 80
2	0.2	0.8	1.5	2.5														
5		1.5	2	8														
10			4	12	32													
20				20	35	45	60											
60					50	80	100	110	120									
150						120	160	180	200	220								
300							200	230	300	350	380	420						
450								420	480	510	600	660	750	850				
800									700	750	800	835	865	900	925	950	1.000	

Higher torque through additional key possible.

#### Ordering example

EKL / 60 / A / 19 / 24 / XX

Model  
Series  
Type Elastomer insert  
Bore Ø D1 H7  
Bore Ø D2 H7  
Non standard e.g. finely balanced

All data is subject to change without notice.