

ELECTRICAL OPTIONS/ SPECIFICATIONS
 OUTPUT SUPPLY (NOM.)
 'A' 0.5 - 4.5V RATIOMETRIC 5V
 'C' 0.5 - 9.5V 24V
 'G' 0.5 - 4.5V 24V
 SUPPLY CURRENT 12mA TYP. 20mA MAX.
 'H' 4 TO 20mA SOURCE† 24V
 † DRIVE 300Ω MAXIMUM TO 0V

CONNECTIONS; CABLE 3-CORE
 +Ve RED
 0V BLACK
 -Ve -
 OUTPUT WHITE
 BODY SCREEN

CABLE; 0.2mm², O/A SCREEN, PUR JACKET. O/D; 3-CORE: Ø4mm,

SUPPLIED WITH 50cm OR REQUIRED LENGTH IN cm. e.g. 'L50'
 CONNECTORS; MAXIMUM CONDUCTOR CROSS SECTION 0.25mm²

SENSOR IS MANUFACTURED TO A SPECIFIC LENGTH AND
 MEASUREMENT RANGE SPECIFIED BY THE CUSTOMER UP TO
 A MAXIMUM MEASUREMENT RANGE OF 600mm.

BODY MATERIAL:- STAINLESS STEEL.


TARGET TUBE OPTIONS:

MATERIAL: OPTION 'R' - STAINLESS STEEL 16 Ø9.45
 OPTION 'S' - ALUMINIUM 6063 Ø3/8" (9.2-9.8mm)

TARGET TUBE FLANGE OPTIONS: SEE DRAWING TG24-11


TARGET TUBE MOUNTING ARRANGEMENTS: SEE DRAWING P100-12

SEALING: IP67 AS STANDARD
 (IP68 VERSION AVAILABLE ON REQUEST)

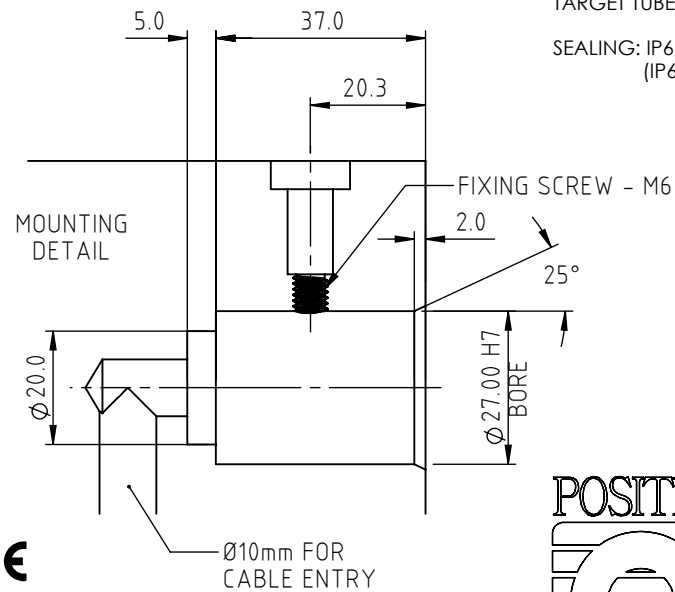

DRAWINGS NOT TO BE CHANGED WITHOUT REFERENCE TO THE CHANGE PROCEDURE.
 CHANGES TO PARTS USED IN INTRINSICALLY SAFE PRODUCT MUST BE APPROVED BY THE AUTHORISED PERSON.
 THIS IS AN UNCONTROLLED PRINT AND WILL NOT BE UPDATED.

REV	CHANGE HISTORY	DR'WN	DATE	CHK'D
A	FIRST RELEASE	ASC	08/09/2020	



APPROVED BY	REV A		X ±0.4 X.X ±0.2 X.XX ±0.1 DIMS mm
DESCRIPTION LIPS P116 INTERNALLY MOUNTED CYLINDER SENSOR			
SCALE A4	3:4	DRAWING NUMBER P116-11	SHEET 1 OF 1