

LOAD CELL CHARACTERISTICS




CAPACITY 5, 10, 25, 50 (lbf)

Interface Inc. claims proprietary rights in the information disclosed herein. This drawing is furnished in confidence on the express understanding that neither it nor any reproduction thereof will be disclosed to others or used for the purpose of manufacture or procurement of the article or part shown hereon without written permission of Interface Inc. The drawing shall remain the property of Interface Inc. and shall be returned upon request by Interface Inc.


82884

REVISIONS


REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	12/12/2019	JAMES R.
B	ADDED 6 IN DIM (CABLE TIE LOCATION)	6/4/2020	RMP
C	FLEXURE HGT .125 +/- .010 WAS .13	9/02/2020	JR

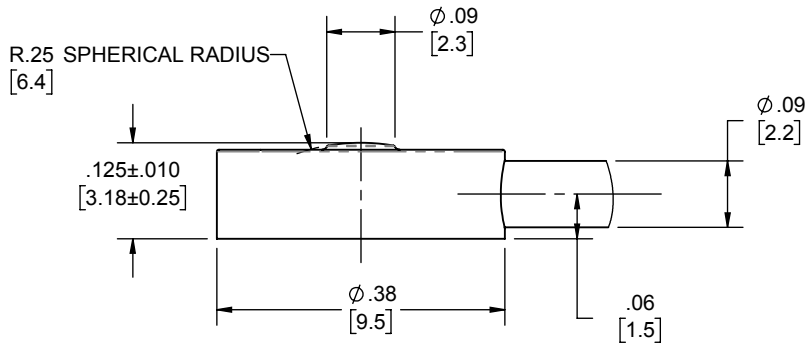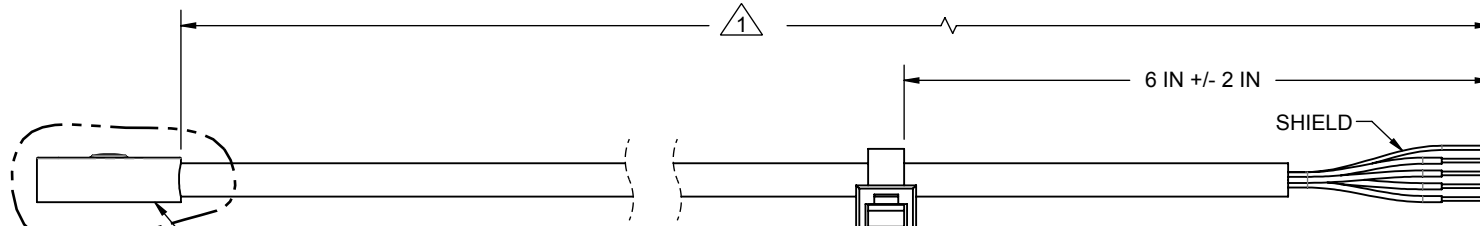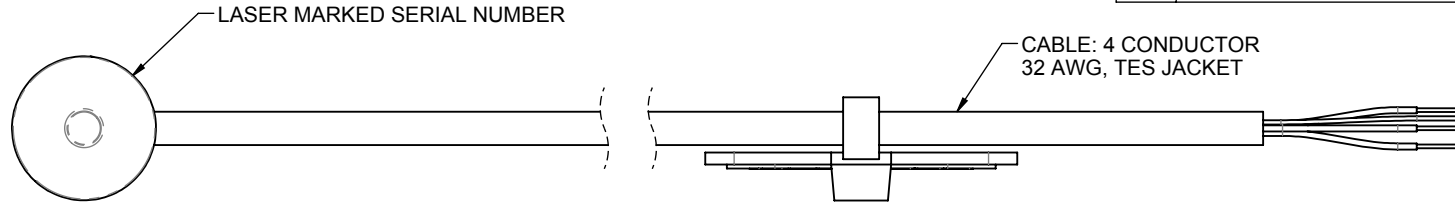

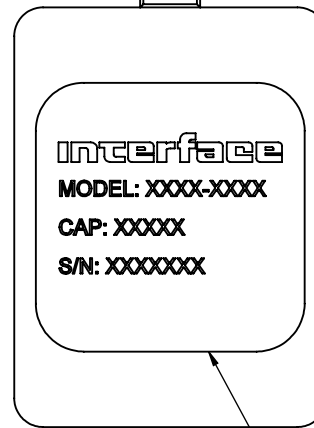

**DETAIL A
SCALE 4 : 1**

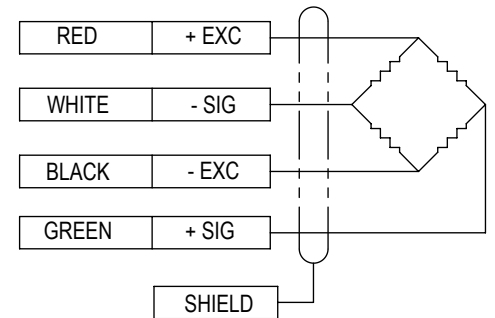


IDENTIFICATION LABEL INCLUDING: MODEL, CAPACITY & SERIAL NUMBER



COMPRESSION UPSCALE

-  FLEXURE MATERIAL: STAINLESS STEEL.
-  STANDARD CABLE LENGTH IS 5 FT [1.5M], NON-STANDARD CABLE LENGTH PER OPTION CODE.

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES [mm]	
TOLERANCES ARE:	
ANGLES	± 0° 30'
.XX	± .01 [0.25]
.XXX	± .005 [0.13]
CREATOR	DATE
DESIGNED: JAMES R.	12/09/19
DETAILED: DAVID C.	12/11/19
WEIGHT: (APPROX) 0.00 (lbs)	

Interface 7418 E. HELM DRIVE
FORCE MEASUREMENT SOLUTIONS, SCOTTSDALE, AZ 85260 USA

TITLE:
**OUTLINE MODEL:
 LBSU -5 THRU -50**

SIZE: A	DWG. NO: 82884	REV: C
SCALE: 2:1	SHEET 1 OF 1	