

FEATURES & BENEFITS

- Proprietary Interface temperature compensated strain gages
- Environmentally sealed
- 0.01% non-repeatability
- 0.0008%/°F temp. effect on output
- Tension and compression
- Compact size

SPECIFICATIONS

CAPACITY	50 - 5K lbf (222 - 22.2K N)	10K lbf (44.5K N)		
ACCURACY – (MAX ERROR)				
Nonlinearity – %FS	±0.03			
Hysteresis – %FS	±0.02	±0.03		
Non-repeatability – %RO	± 0.01			
Creep, in 20 min – %	± 0.025			
TEMPERATURE				
Compensated Range	°F	0 to +150		
	°C	-15 to +65		
Operating Range	°F	-65 to +200		
	°C	-55 to +90		
Effect on Output – % / °F MAX	±0.008			
Effect on Zero – %RO / °F MAX	±0.15			
ELECTRICAL				
Rated Output – mV/V (Nominal)	3.0			
Zero Balance – %RO	±1.0			
Bridge Resistance – Ohm (Nominal)	350			
Excitation Voltage – VDC MAX	15			
Insulation Resistance – Megohm	5000			
MECHANICAL				
Calibration	Compression			
Safe Overload – %CAP	±150			
NATURAL FREQUENCY/DEFLECTION				
lbf	N	Deflection		Nat. Freq. (Hz)
		in	mm	
50	222	0.004	0.1016	2130
100	445	0.004	0.1016	2400
250	1.11K	0.005	0.127	3000
500	2.22K	0.010	0.254	2220
1K	4.45K	0.013	0.3302	1970
2.5K	11.1K	0.025	0.635	1720
5K	22.2K	0.022	0.5588	1400
10K	44.5K	0.026	0.6604	1620
Material	50 - 2.5K lbf	Aluminum		
	222 - 11.1K N			
	5K - 10K lbf	Alloy Steel		
	22.2K - 44.5K N			

STANDARD CONFIGURATION



Model SSB (shown)

OPTIONS


- Standardized output
- Cable length
- Transducer Electronic Data Sheet (TEDS)
- Special temperature range
- Custom calibration
- Add connector to cable

ACCESSORIES

- Instrumentation

CONNECTOR OPTIONS


- 10 ft (3 m) integral cable

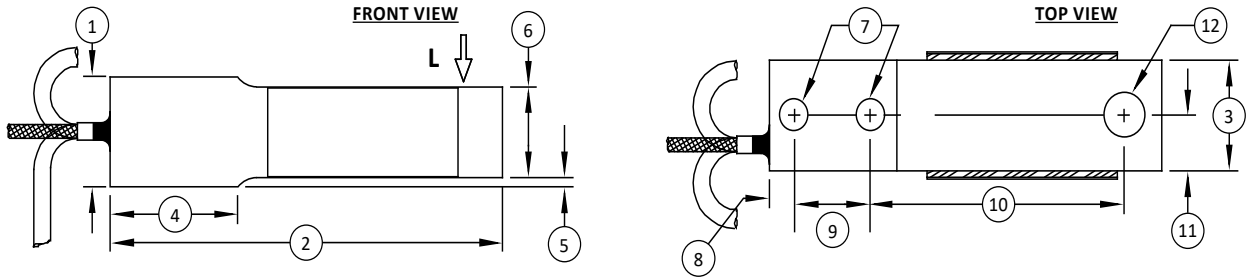

Notes:
* L indicates load direction

DIMENSIONS

See Drawing	CAPACITY									
	U.S. (lbf)	Metric (N)	U.S. (lbf)	Metric (N)	U.S. (lbf)	Metric (N)	U.S. (lbf)	Metric (N)	U.S. (lbf)	Metric (N)
	50	222	100	445	250	1.11K	500	2.22K	1K	4.45K
	in	mm	in	mm	in	mm	in	mm	in	mm
(1)	0.98	24.9	0.98	24.9	0.98	24.9	1.00	25.4	1.50	38.1
(2)	2.38	60.5	2.38	60.5	2.38	60.5	3.88	98.6	5.00	127
(3)	0.50	12.7	0.50	12.7	0.50	12.7	1.00	25.4	1.00	25.4
(4)	0.97	24.6	0.97	24.6	0.97	24.6	1.25	31.8	1.75	44.5
(5)	0.11	2.8	0.15	3.9	0.11	2.8	0.09	2.3	0.10	2.5
(6)	0.82	20.8	0.73	18.4	0.82	20.8	0.82	20.8	1.36	34.5
(7)	∅0.17	∅4.3	∅0.17	∅4.3	∅0.17	∅4.3	∅0.28	∅7.1	∅0.41	∅10.3
(8)	0.25	6.4	0.25	6.4	0.25	6.4	0.25	6.4	0.38	9.7
(9)	0.50	12.7	0.50	12.7	0.50	12.7	0.75	19.1	1.00	25.4
(10)	1.31	33.3	1.31	33.3	1.31	33.3	2.50	63.5	3.25	82.6
(11)	0.25	6.4	0.25	6.4	0.25	6.4	0.50	12.7	0.50	12.7
(12)	∅0.17	∅4.3	∅0.17	∅4.3	∅0.17	∅4.3	∅0.40	∅10.2	∅0.40	∅10.2

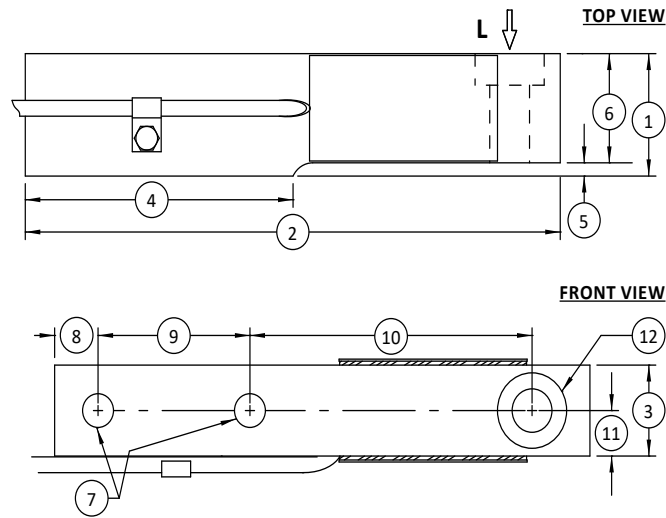

Notes:
* L indicates load direction

DIMENSIONS (CONTINUED)

See Drawing	CAPACITY			
	U.S. (lbf)	Metric (N)	U.S. (lbf)	Metric (N)
	2.5K - 5K	11.1K - 22.2K	10K	44.5K
	in	mm	in	mm
(1)	1.45	36.8	1.94	49.3
(2)	8.00	203.0	9.25	235.0
(3)	1.44	36.6	1.44	36.6
(4)	3.75	95.0	4.63	117.0
(5)	0.10	2.5	0.21	5.3
(6)	1.35	34.3	1.73	44
(7)	Ø0.53	Ø13.0	Ø0.53	Ø13.5
(8)	0.75	19.0	0.75	19.0
(9)	2.50	63.5	2.63	66.8
(10)	3.88	98.6	4.88	124.0
(11)	0.72	18.3	0.72	18.3
(12)	Ø0.69	Ø17.5	Ø0.69	Ø17.5