

NOTES:





1. ALIGNMENT EDGE SHOULD BE NO HIGHER THAN .19 [4.8] TO AVOID INTERFERENCE WITH COVER.

2. PRODUCT AVAILABILITY:


02550364- X X X		RANGE
OUTPUTS 1: SINGLE 2: DUAL 3: 4-20 OUT	OPTIONS 0: STANDARD 1: TEMP SENSOR 2: METRIC MOUNTING 3: METRIC MOUNTING W/ TEMP SENSOR	1: 1°
		2: 3°
		3: 14.5°
		4: 30°
		5: 60°
		6: 90°

3. DATUM - A - AND - B - ARE DEFINED AS REFERENCE SURFACES.

4. DIMENSIONS ARE [mm] INCH

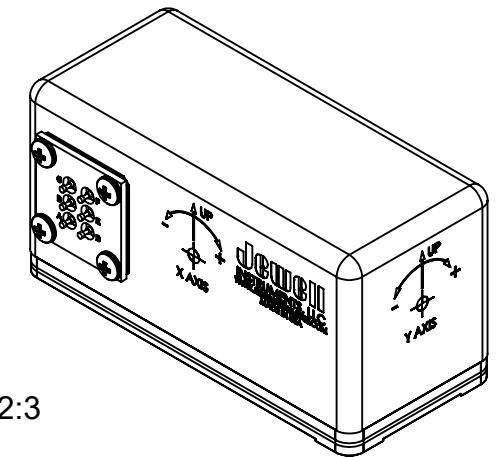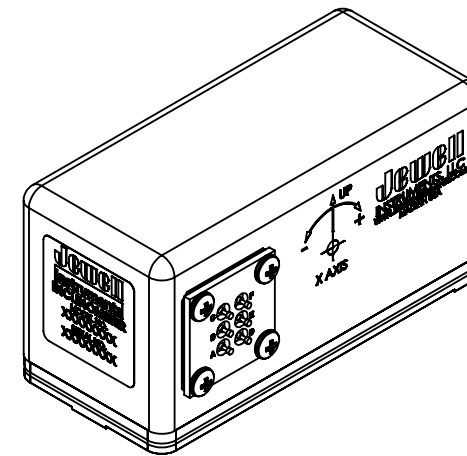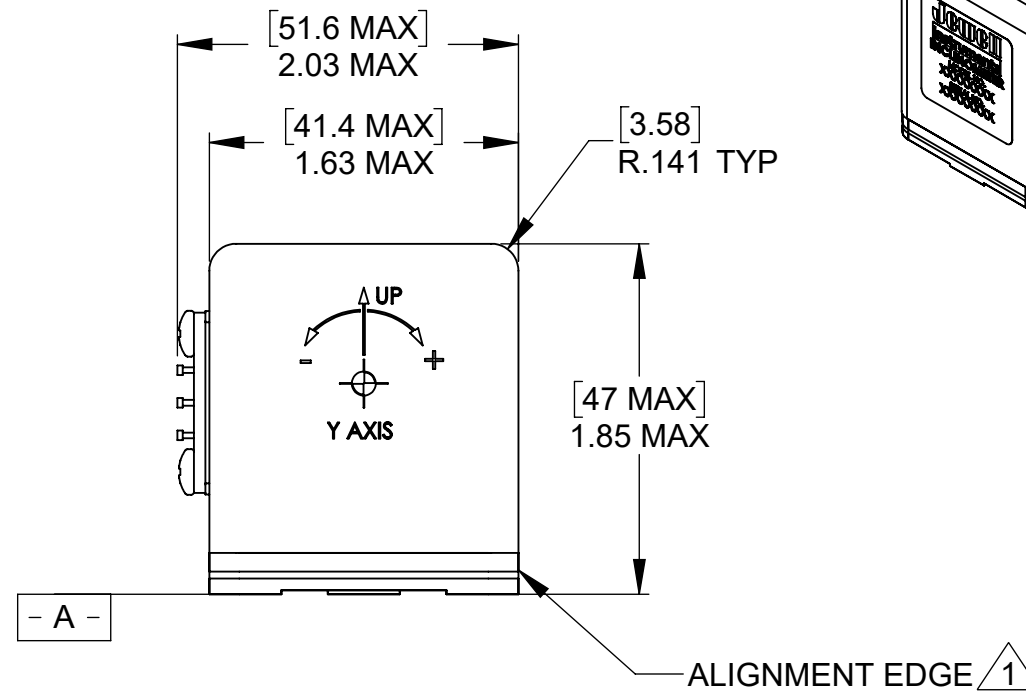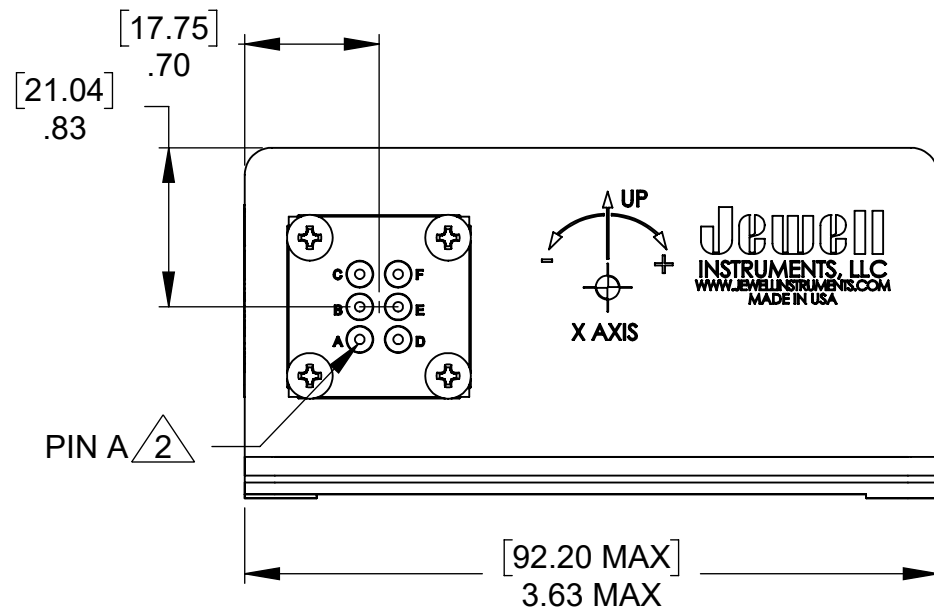

SCALE 2:3

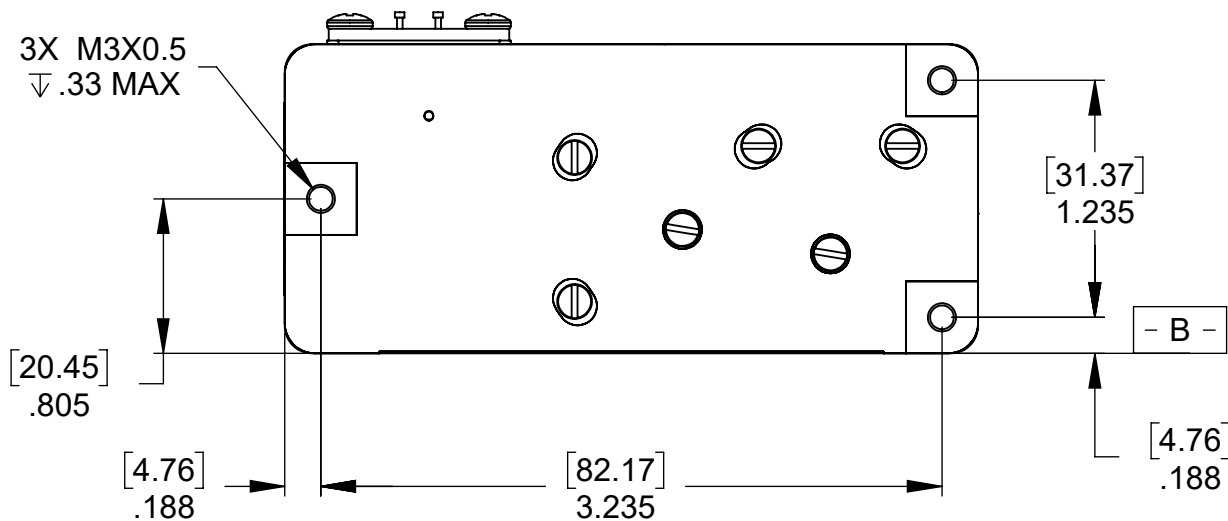

CONNECTOR	
PIN	FUNCTION
DUAL SUPPLY	
A	+12 TO +18 VDC
B	POWER COMMON
C	-12 TO -18 VDC
D	X-AXIS OUTPUT SIGNAL
E	N/C
F	Y-AXIS OUTPUT SIGNAL

APPLICATION		DIMENSIONS ARE IN INCHES AND APPLY TO PART BEFORE FINISHING
USED ON	NEXT ASSY	
		TOLERANCE UNLESS SPECIFIED TWO PLACE DECIMALS (00) ± .01 THREE PLACE DECIMALS (000) ± .005 ANGLES ± 1° RAW MATL - COMMERCIAL STANDARD



MANCHESTER, NH
TRIPLETT MODUTEC A&M EMICO

PROPRIETARY NOTICE
THIS DRAWING IS THE PROPERTY OF JEWELL INSTRUMENTS, LLC. NEITHER THIS DOCUMENT NOR THE DATA CONTAINED HEREIN SHALL BE DISCLOSED, REPRODUCED IN WHOLE OR IN PART WITHOUT THE WRITTEN AUTHORIZATION OF JEWELL INSTRUMENTS, LLC. NO RIGHT IS GRANTED TO DISCLOSE OR SO USE ANY INFORMATION CONTAINED HEREIN. ALL RIGHTS RESERVED.

TITLE		
LCF-2330-P OUTLINE DRAWING		
DRAWING NO.	REV	
OD02550364-000	B	
SCALE	CAGE CODE	SHEET 1 OF 1
1:1	33005	