
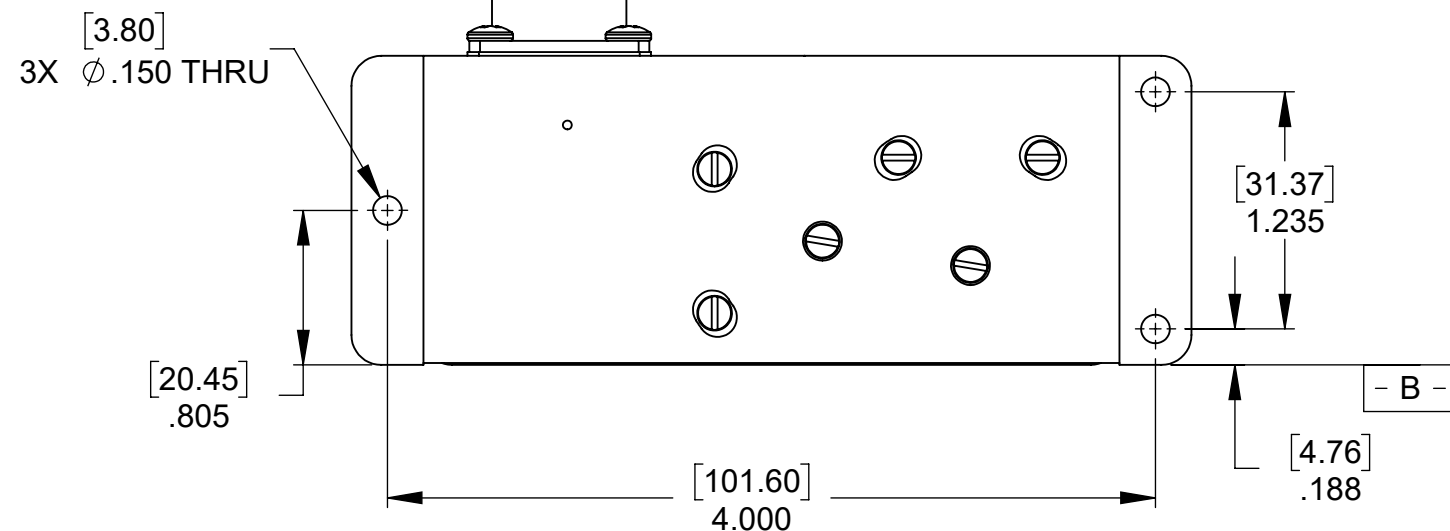
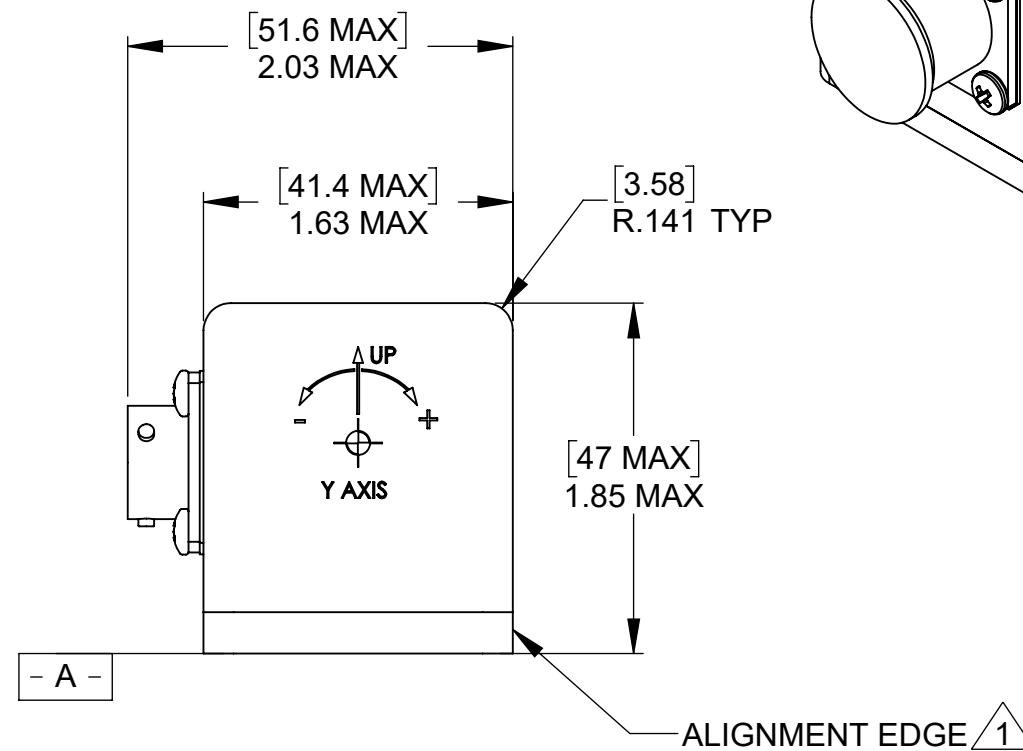
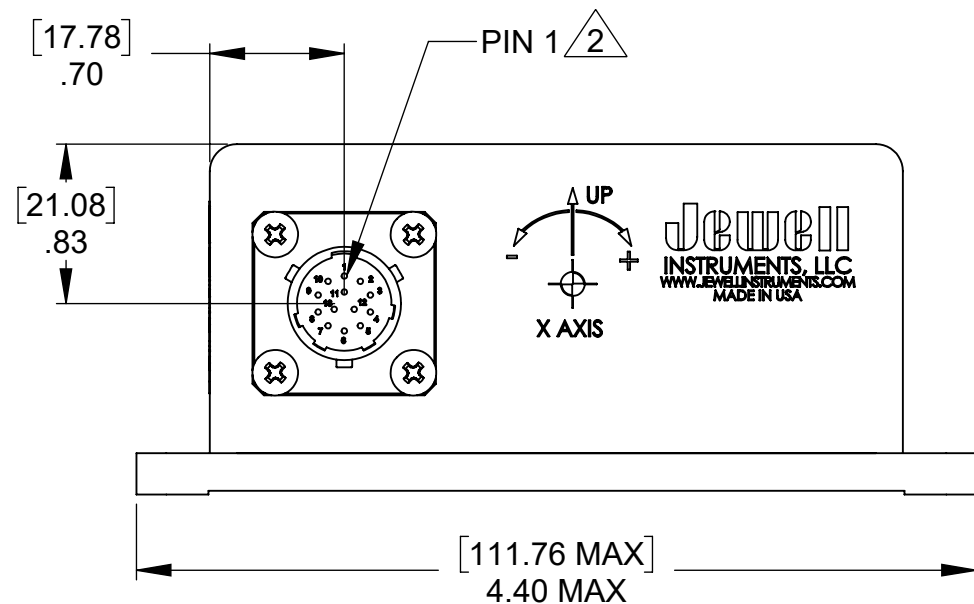


NOTES:

1. ALIGNMENT EDGE SHOULD BE NO HIGHER THAN .19 [4.8] TO AVOID INTERFERENCE WITH COVER.
2. CONNECTOR IS MS27476Y10D35P, MATES WITH MS27473T10B35S.
3. DATUM **- A -** AND **- B -** ARE DEFINED AS REFERENCE SURFACES.
4. DIMENSIONS ARE $\frac{[mm]}{INCH}$

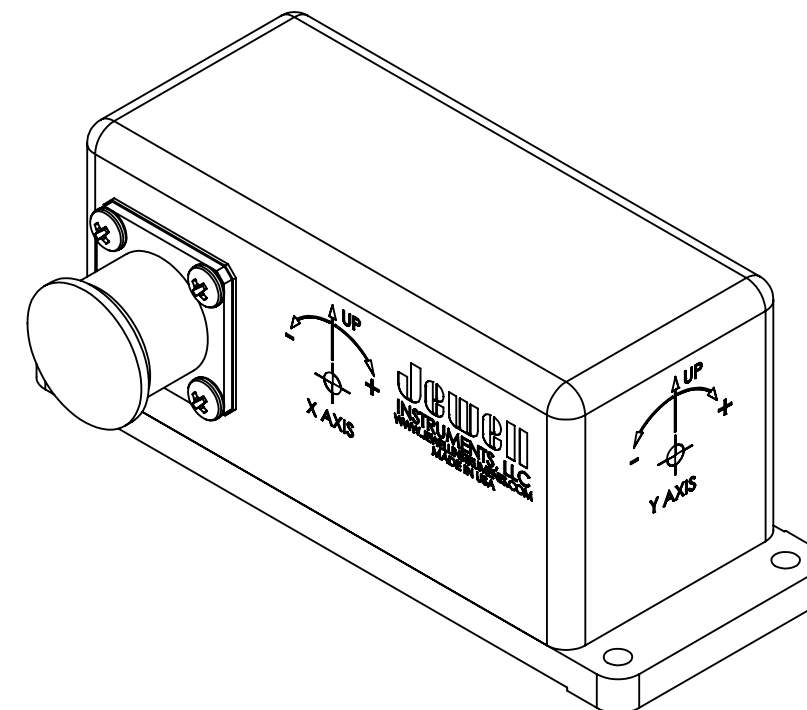

CONNECTOR	
PIN	FUNCTION
1	+12 TO +18 VDC
2	-12 TO -18 VDC
3	POWER COMMON
4	X-AXIS OUTPUT SIGNAL
5	X-AXIS OUTPUT RETURN
6	Y-AXIS OUTPUT SIGNAL
7	Y-AXIS OUTPUT RETURN
8	TEMP OUT (OPTIONAL)
9	N/C
10	N/C
11	N/C
12	N/C
13	N/C

APPLICATION		DIMENSIONS ARE IN INCHES AND APPLY TO PART BEFORE FINISHING
USED ON	NEXT ASSY	TOLERANCE UNLESS SPECIFIED
		TWO PLACE DECIMALS (.00) ± .01
		THREE PLACE DECIMALS (.000) ± .005
		ANGLES ± 1°
		RAW MATL - COMMERCIAL STANDARD

Jewell Instruments
 MANCHESTER, NH
 TRIPLETT MODUTEC A&M EMICO

PROPRIETARY NOTICE
 THIS DRAWING IS THE PROPERTY OF JEWELL INSTRUMENTS, LLC. NEITHER THIS DOCUMENT NOR THE DATA CONTAINED HEREIN SHALL BE DISCLOSED, REPRODUCED IN WHOLE OR IN PART WITHOUT THE WRITTEN AUTHORIZATION OF JEWELL INSTRUMENTS, LLC. NO RIGHT IS GRANTED TO DISCLOSE OR SO USE ANY INFORMATION CONTAINED HEREIN. ALL RIGHTS RESERVED.

TITLE	
LCF-2330 W/FLANGED BASE	
DRAWING NO.	REV
OD02550402	A
SCALE	CAGE CODE
1:1	33005
SHEET 1 OF 1	