
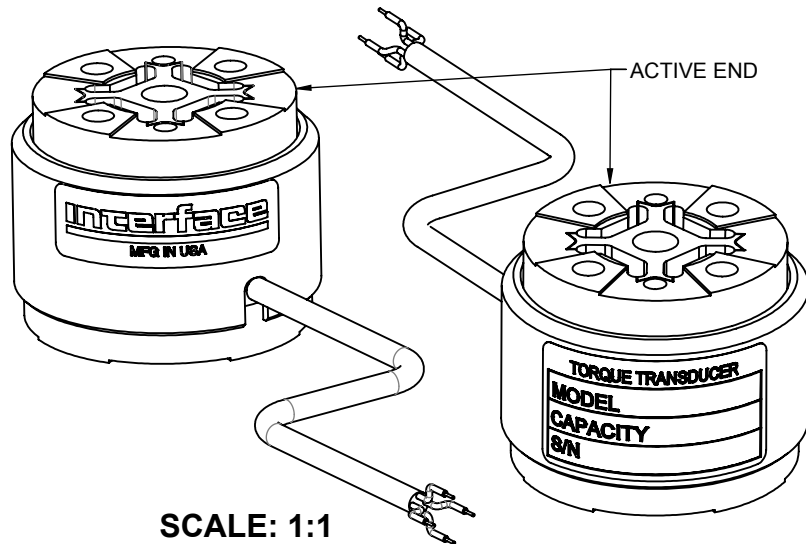
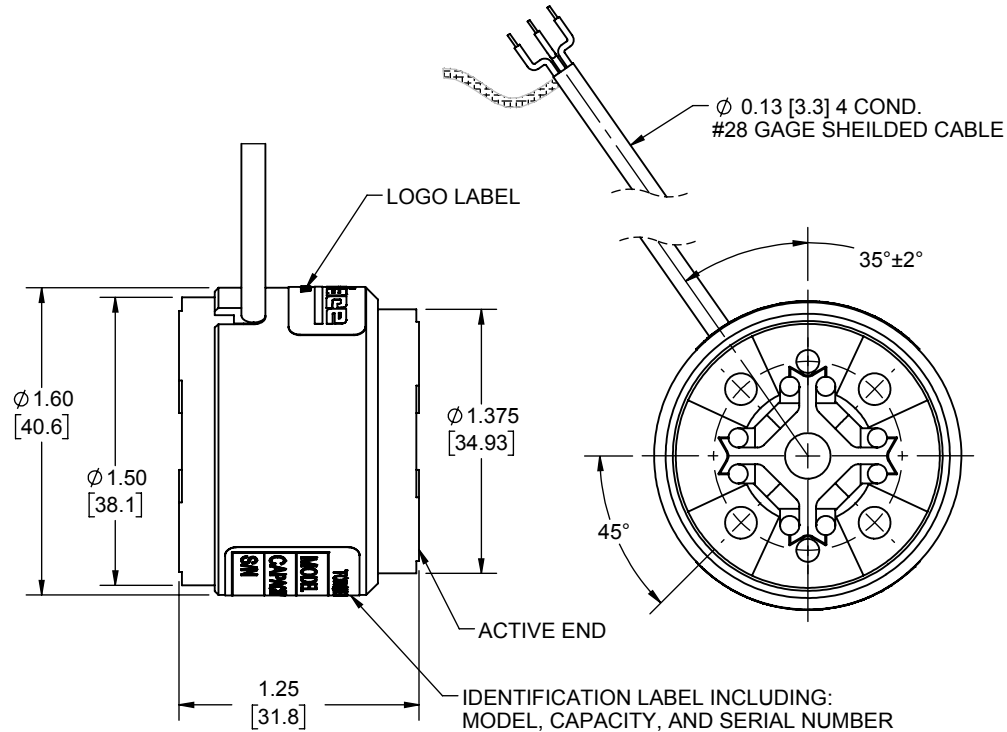



Interface Inc. claims proprietary rights in the information disclosed herein. This drawing is furnished in confidence on the express understanding that neither it nor any reproduction thereof will be disclosed to others or used for the purpose of manufacture or procurement of the article or part shown herein without written permission of Interface Inc. The drawing shall remain the property of Interface Inc. and shall be returned upon request by Interface Inc.

82554

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	10/25/2018	JR
B	ADDED MISSING ϕ .237 DIMENSION	11/8/2019	RMP

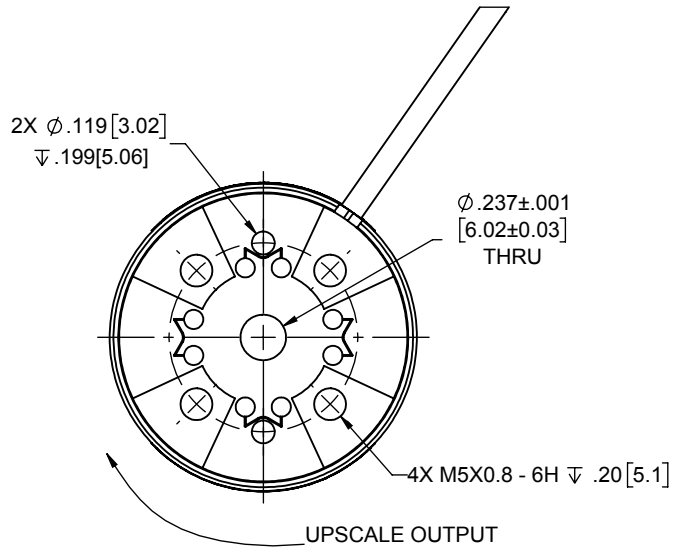

SCALE: 1:1

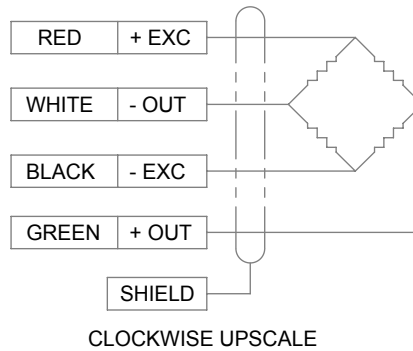

2. STANDARD CABLE LENGTH IS 5FT (1.5M). OTHER LENGTH PER OPTION CODE.

1. ORIENTATION: TRANSDUCER MAY BE USED IN ANY ROTATIONAL ORIENTATION. SIDE LOAD FORCES AND OVERHANG MOMENTS ARE BEST REJECTED WHEN IN THE VERTICAL AXIS AS SHOWN (IN LINE WITH 0.119 ALIGNMENT HOLES).

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES [mm]
TOLERANCES ARE:
ANGLES $\pm 0^\circ 30'$
.XX $\pm .01$ [0.25]
.XXX $\pm .005$ [0.13]

CREATOR	DATE
DESIGNED: JAMES R.	10/22/2018
DETAILED: BRET B.	10/24/2018
WEIGHT: (APPROX) 0.26 (lbs)	

Interface 7418 E. HELM DRIVE
FORCE MEASUREMENT SOLUTIONS, SCOTTSDALE, AZ 85260 USA

TITLE:
**OUTLINE MODEL: MRTP
TORQUE TRANSDUCER**

SIZE: A	DWG. NO: 82554	REV: B
SCALE: 1:2	SHEET 1 OF 1	