
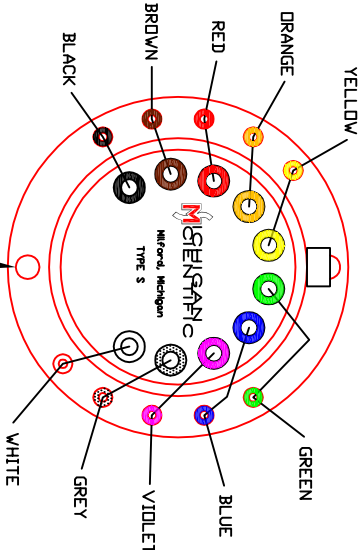


V8019222

4-40 X 3/16 SCREW. REMOVE AFTER EACH 20 MILLION REVOLUTIONS TO ADD A FEW DROPS OF TYPE F ATF.

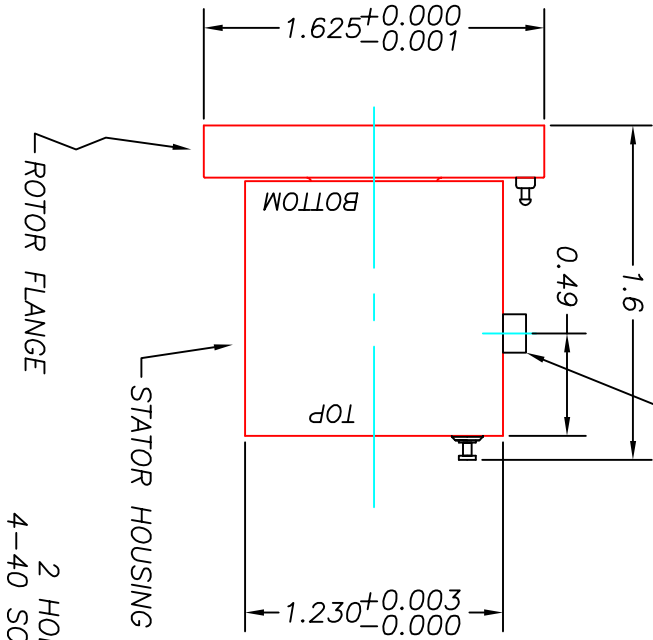

RING POSITION	COLOR
TOP	BLACK
10	WHITE
9	GREY
8	VIOLET
7	BLUE
6	GREEN
5	YELLOW
4	ORANGE
3	RED
2	BROWN
1	

THIS SAME HOUSING IS USED FOR UNITS WITH 4, 6, 8 OR 10 SLIP RINGS. THE DIMENSIONS STAY THE SAME, ONLY THE NUMBER OF SOLDER TERMINALS CHANGES.

DATE	BY	REVISION	LDC.

**MICHIGAN**  
CORPORATION  
08500 ANCE ROAD  
CHARLEVOIX, MI 49720  
PHONE: (231)547-5511 FAX: (231)547-7070

TOLERANCES	DESIGNED BY:	DATE:	SCALE:
.xxxx ±----	KDL	6-25-12	1:1
.xxx ±---	DRAWN BY:	TITLE:	
.xx ±--	KDL	S10-15K09-LHV	
ANGLES ±--'	CHECKED BY:	SHT OF SHTS:	SIZE
SURFACE FINISH ---RMS			AH
DRAWING NO.: C226108A	MATERIAL:	CORROSION RESISTANT	