
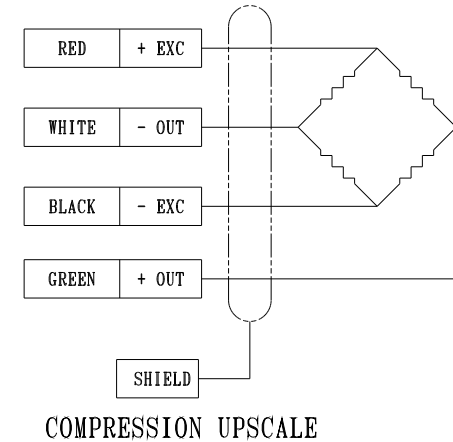
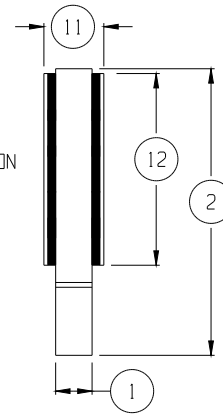


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	ADDED OVERLOAD PROTECTION	03-12-03	

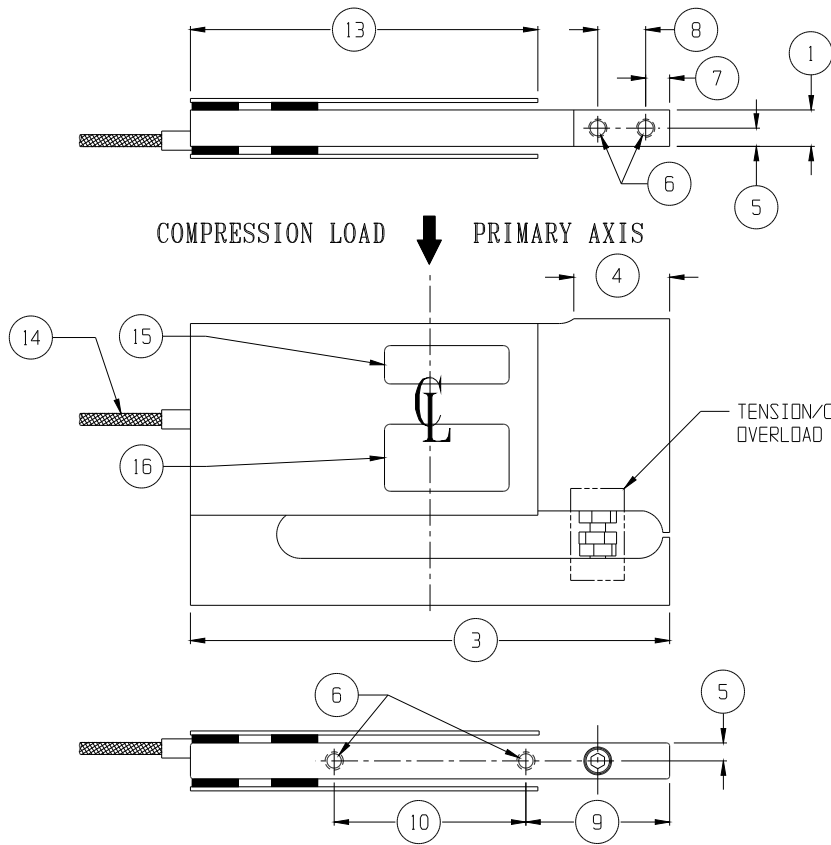

LOAD CELL CHARACTERISTICS		U.S. CAPACITIES	
CAPACITY		3 (1bf)	
1	FLEXURE WIDTH	0.38 (9.6)	
2	FLEXURE HEIGHT	2.99 (75.9)	
3	FLEXURE LENGTH	5.00 (127.0)	
4	LOAD MOUNTING SURFACE LENGTH	1.00 (25.4)	
5	MOUNTING HOLE OFFSET FROM EDGE	0.25 (6.4)	
6	MOUNTING THREADS TYPICAL	#10-32 UNF-2B X .50 DEEP	
7	MOUNTING HOLES TO FLEXURE EDGE	0.19 (4.8)	
8	MOUNTING HOLE SPACING	0.50 (12.7)	
9	MOUNTING HOLE OFFSET FROM EDGE	1.50 (38.1)	
10	MOUNTING HOLE SPACING	2.00 (50.8)	
11	COVER WIDTH	0.62 (15.7)	
12	COVER HEIGHT	2.00 (50.8)	
13	COVER LENGTH	3.63 (92.1)	
14	CABLE TYPE [3]	.13 (3.3) O.D. 4 CONDUCTOR 28 GAGE SHIELDED CABLE	
15	LABEL	LOGO	
16	IDENTIFICATION LABEL INCLUDING: MODEL, CAPACITY & SERIAL NUMBER		

[3] STANDARD CABLE LENGTH IS 5 ft (1.5 M)
NON-STANDARD CABLE LENGTH PER OPTION CODE

2. DIMENSIONAL TOLERANCE: ± 0.01 (± 0.3)

1. DIMENSIONS IN INCHES & (MM)

Interface, Inc. 7401 E. BUTHERUS DR. SCOTTSDALE, ARIZONA 85260			
TITLE:		DWG NO.:	
OUTLINE MODEL: SPI-3		80034	
SIZE: C	DRAWN BY: PER	DATE: 12-28-95	REV: A
SCALE: 1:1		APPROVED BY:	SHEET 1 OF 1
Interface Inc. claims propriety rights in the information disclosed herein. This drawing is furnished in confidence on the express understanding that neither it nor any reproduction thereof will be disclosed to others or used for the purpose of manufacture or procurement of the article or part shown herein without written permission of Interface Inc. The drawing shall remain Interface's property and shall be returned on Interface's request.			