



80026

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

Submit FM Approvals
Revision Report

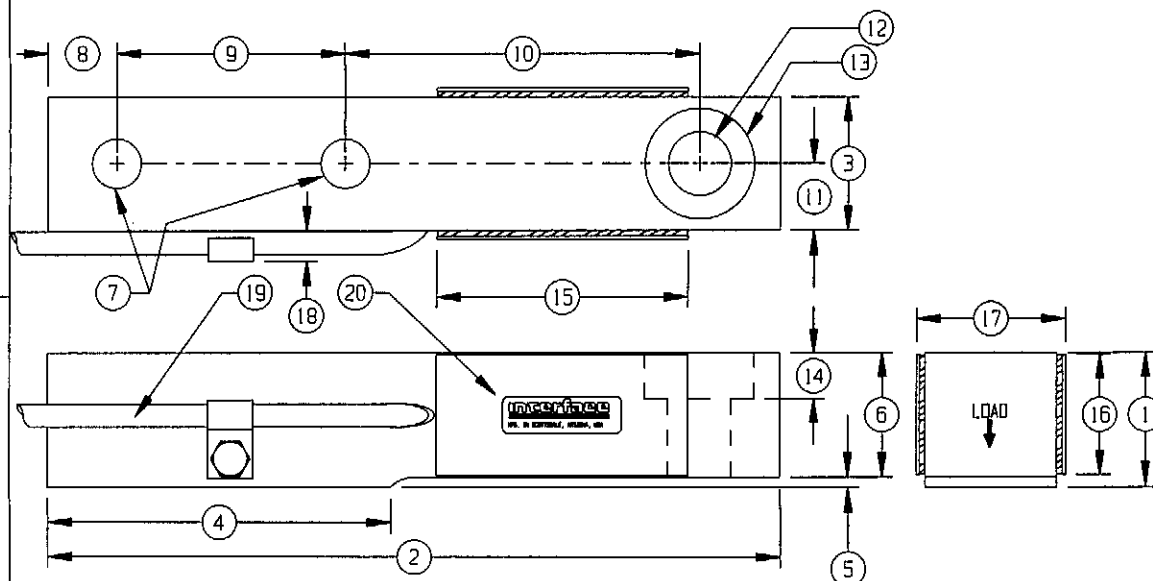

LOAD CELL CHARACTERISTICS		U.S. CAPACITIES	
#	CAPACITY (lbf)	2500	5000
1	FLEXURE HEIGHT	1.45 (36.8)	
2	FLEXURE LENGTH	8.00 (203)	
3	FLEXURE WIDTH	1.44 (36.6)	
4	FLEXURE MOUNTING SURFACE LENGTH	3.75 (95)	
5	MOUNT SURFACE TO FLEXURE BOTTOM	0.10 (2.5)	
6	FLEXURE END HEIGHT	1.35 (34.3)	
7	MOUNT HOLE DIAMETER	0.53 (13)	
8	MOUNTING HOLE OFFSET FROM EDGE	0.75 (19)	
9	MOUNTING HOLE SPACING	2.50 (63.5)	
10	MOUNT HOLE TO CLEARANCE HOLE	3.88 (98.6)	
11	CLEARANCE HOLE TO FLEXURE EDGE	0.72 (18.3)	
12	CLEARANCE HOLE DIAMETER	0.69 (17.5)	
13	COUNTERBORE DIAMETER	1.20 (30.5)	
14	COUNTERBORE DEPTH	0.50 (13)	
15	COVER LENGTH	2.75 (70)	
16	COVER HEIGHT	1.31 (33.3)	
17	OVERALL WIDTH	1.64 (41.7)	
18	CABLE CLAMP HEIGHT	0.30 (7.6)	
19	CABLE TYPE [3]	0.25 (6.35) O.D. 7 CONDUCTOR 22 GAGE SHIELDED CABLE	
20	IDENTIFICATION LABEL INCLUDING: MODEL, CAPACITY & SERIAL NUMBER		

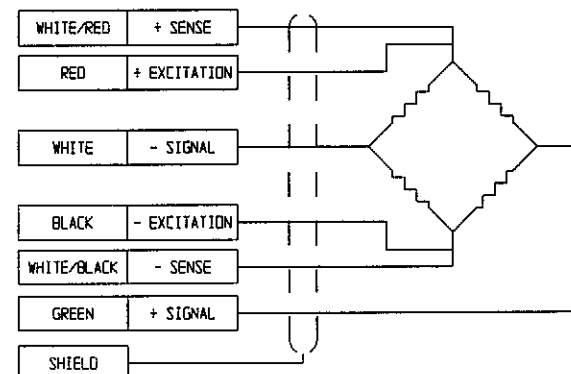

[3] STANDARD CABLE LENGTH IS 10 FT (3M)
NON-STANDARD CABLE LENGTH PER OPTION CODE

2. DIMENSIONAL TOLERANCE: ± 0.01 (mm ± 0.3)

1. DIMENSIONS IN INCHES & (MM)

Interface, Inc.

7401 E. BUTLER DR. SCOTTSDALE, ARIZONA 85260

TITLE: OUTLINE
MODELS: SSB-2500 TO 5000

DWG NO.: 80026

SIZE: A DRAWN BY: PER DATE: 12-26-95 REV: --

SCALE: .5:1 APPROVED BY: SHEET 1 OF 1

Interface Inc. claims proprietary rights in the information disclosed herein. This drawing is furnished in confidence on the express understanding that neither it nor any reproduction thereof will be disclosed to others or used for the purpose of manufacture or procurement of the article or part shown herein without written permission of Interface Inc. The drawing shall remain Interface's property and shall be returned on Interface's request.