
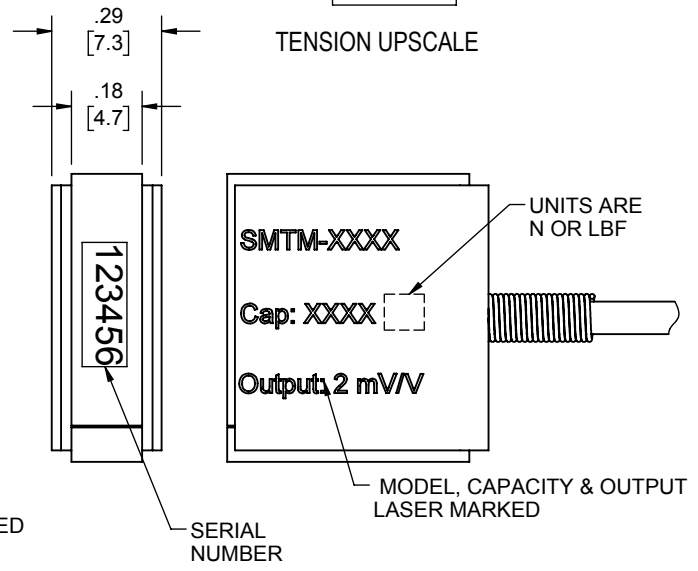
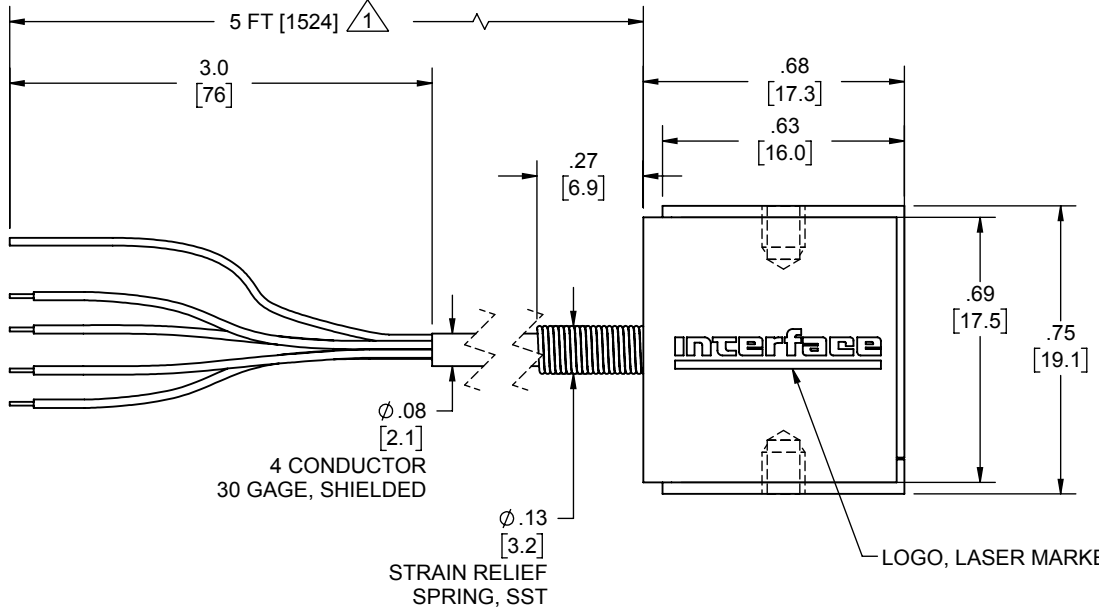
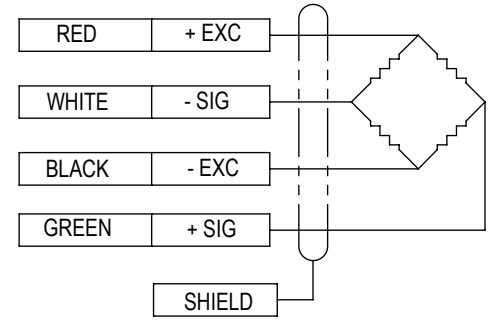


LOAD CELL CHARACTERISTICS


#	CAPACITY	US CAPACITIES (lbf)		SI CAPACITIES (N)	
		5, 10	25, 50	20, 50	100, 200
1	FLEXURE MATERIAL	ALUMINUM	STAINLESS STEEL	ALUMINUM	STAINLESS STEEL
2	THREAD (BOTH ENDS)	#4-40 UNC-2B ▽.11[2.8]		M3 X 0.5-6H ▽.11[2.8]	

Interface Inc. claims proprietary rights in the information disclosed herein. This drawing is furnished in confidence on the express understanding that neither it nor any reproduction thereof will be disclosed to others or used for the purpose of manufacture or procurement of the article or part shown hereon without written permission of Interface Inc. The drawing shall remain the property of Interface Inc. and shall be returned upon request by Interface Inc.

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
C	REPLACED LOGO & ID LABELS WITH LASER MARKING; UPDATED TO CURRENT STDS.	05/18/2017	RMP
D	ADDED NOTE "UNITS ARE N OR LBF"	10/18/2017	RMP
E	ADDED "5 FT" DIM; REMOVED 19.0 DIM; ADDED MATERIAL TO TABLE	03/08/2019	RMP
F	ADDED NOTE 1	7/15/2019	RMP

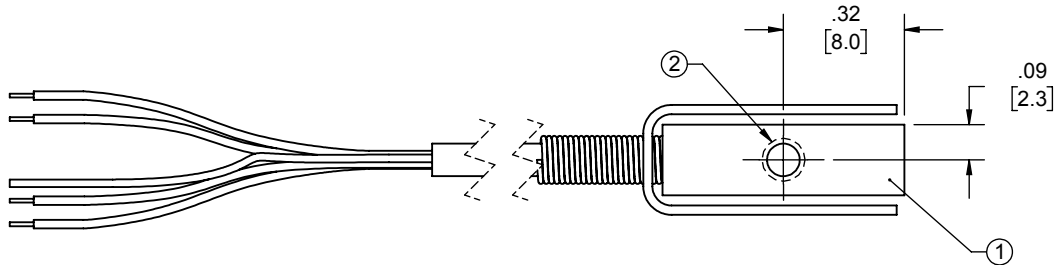

△ STANDARD CABLE LENGTH IS 5 FT [1.5 M]. NON-STANDARD CABLE LENGTH PER OPTION CODE.

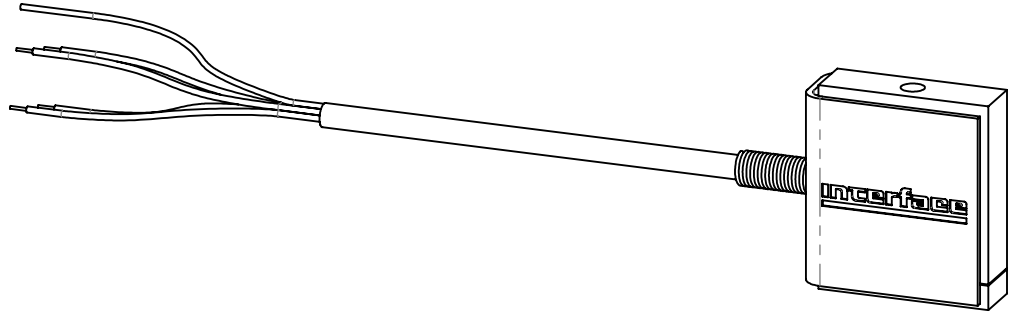

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES [mm]
 TOLERANCES ARE:
 ANGLES ± 0° 30'
 .XX ± .01 [0.25]
 .XXX ± .005 [0.13]

CREATOR	DATE
DESIGNED: JOE G.	12/06/11
DETAILED: RLP	12/06/11
WEIGHT: (APPROX) .02 (lbs)	

Interface
 FORCE MEASUREMENT SOLUTIONS
 7418 E. HELM DRIVE
 SCOTTSDALE, AZ 85260 USA

TITLE:
**OUTLINE MODEL:
 SMTM**

SIZE: A	DWG. NO: 81134	REV: F
SCALE: 2:1	SHEET 1 OF 1	