


THREAD ADAPTORS (U.S. & METRIC)

FEATURES & BENEFITS

- Adapts male to female
- Common Interface thread sizes
- Adapts one thread size to another

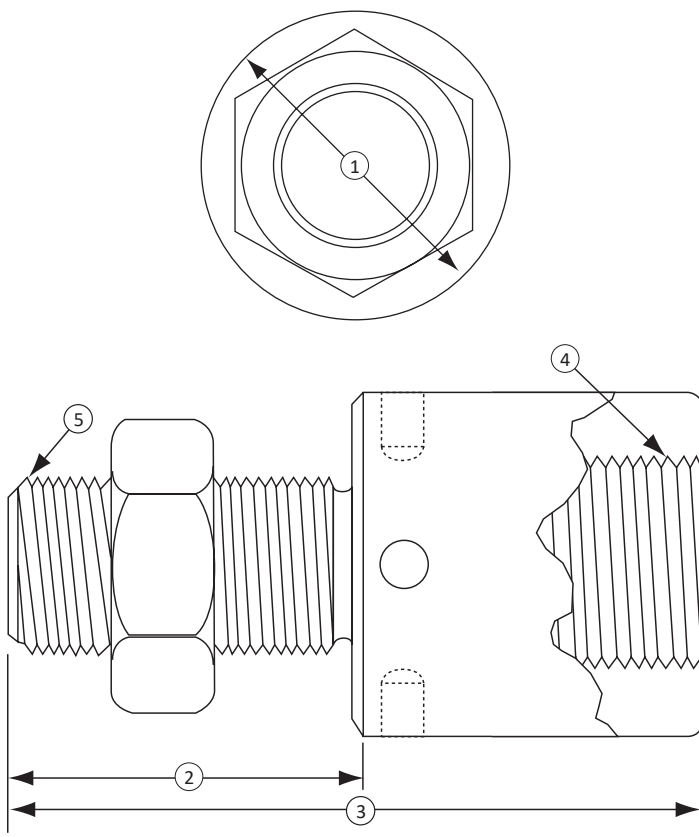

STANDARD CONFIGURATION



Model TA-102 & THD-105 w/JN-107 (Shown)

SPECIFICATIONS

MECHANICAL	
Material	Heat Treated Steel

DIMENSIONS

Model	Jam Nut Included	Application	1		2		3		4	5
			in	mm	in	mm	in	mm	Thread	Male to Female
TA-102	N/A	SM & SSM TO 250	0.75	19.1	0.38	9.7	1.50	38.1	1/2-20x0.63	1/4-28 to 1/2-20
TA-103	N/A	SM & SSM TO 250	0.75	19.1	0.38	9.7	1.50	38.1	3/8-24x0.50	1/4-28 to 3/8-24
TA-106	N/A	SM & SSM TO 250	1.19	30.2	0.44	11.2	1.56	39.6	5/8-18x0.63	1/4-28 to 5/8-18
THD-101	JN-103	LOW PROFILES TO 10K	1.25	31.8	1.75	44.5	3.19	81.0	1/2-20x0.50	5/8-18 to 1/2-20
THD-112	JN-103	LOW PROFILES TO 10K	1.62	41.1	1.75	44.5	4.56	115.8	1-14x1.25	5/8-18 to 1-14
THD-153	JN-105	LOW PROFILES 25K TO 50K	2.00	50.8	2.50	63.5	4.50	114.3	1-14x1.0	1 1/4-12 to 1-14
THD-103	JN-105	LOW PROFILES 25K TO 50K	2.50	63.5	2.34	59.4	4.42	112.3	1 1/2-12x1.40	1 1/4-12 to 1 1/2-12
THD-163	N/A	LOW PROFILES 25K TO 50K	2.50	63.5	1.50	38.1	3.58	90.9	1 1/2-12x1.40	1 1/4-12 to 1 1/2-12
THD-143	JN-105	LOW PROFILES 25K TO 50K	3.38	85.9	2.34	59.4	5.89	149.6	2-12x2.62	1 1/4-12 to 2-12
THD-144	N/A	LOW PROFILES 25K TO 50K	3.38	85.9	1.50	38.1	5.05	128.3	2-12x2.62	1 1/4-12 to 2-12
THD-114	JN-106	LOW PROFILES TO 100K	4.00	101.6	3.75	95.3	9.62	244.3	3-8x4.50	1 3/4-12 to 3-8
THD-115	N/A	LOW PROFILES TO 100K	4.00	101.6	1.75	44.5	7.62	193.5	3-8x4.50	1 3/4-12 to 3-8
THD-105	JN-107	LOW PROFILES TO 200K	5.50	139.7	5.25	133.4	13.0	330	4-8x6.00	2 3/4-8 to 4-8
THD-106	N/A	LOW PROFILES TO 200K	5.50	139.7	2.75	69.9	10.5	267	4-8x6.00	2 3/4-8 to 4-8

International System of Units (SI) dimensions and capacities are provided for conversion only. Standard products have U.S. capacities and dimensions. SI capacities available upon special request and at an additional cost.