



Properties

- Small dimensions
- Excellent phase response
- High resolution
- Low temperature coefficient
- Includes electronic data sheet (TEDS; IEEE 1451.4; Template 25 w. DS2431)
- Well suited for modal and structural analysis
- Two sensitivity versions (10 and 100 mV/g)

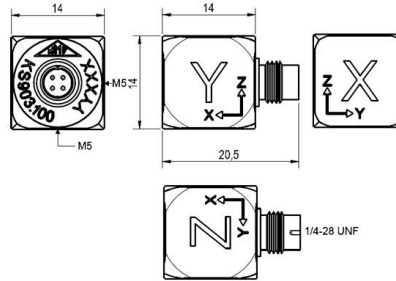


Piezo design	Shear design	
Output	IEPE	
Voltage sensitivity	10	mV/g
Sensitivity tolerance	10	%
Measurement range, pos./neg.	600	g
Destruction limit	7000	g
Transverse sensitivity	<5	%
Lower frequency limit (3 dB)	0,15	Hz
Upper frequency limit (3 dB)	11000 (X); 22000 (Y/Z)	Hz
Lower frequency limit (10 %)	0,25	Hz
Upper frequency limit (10 %)	7000 (X); 14000 (Y/Z)	Hz
Resonant frequency	>30 (X); >50 (Y/Z)	kHz
Resonance amplitude	25	dB
Constant current supply	2 - 20	mA
Bias voltage at 4 mA	12 - 14,5	V
Output impedance	<100	Ω
Residual noise; wide band; RMS	<3000 (0,5 - 20000 Hz)	μg
Noise density 1 Hz	400	μg/√Hz
Noise density 10 Hz	150	μg/√Hz
Noise density 100 Hz	40	μg/√Hz
Noise density 1000 Hz	15	μg/√Hz
Operating temperature range	-30 - 100	°C
Temperature coefficient of voltage sensitivity	±0,01 (<0 °C)	%/K
	-0,01 (0 - 40 °C)	%/K
	-0,03 (40 - 80 °C)	%/K
	-0,04 (>80 °C)	%/K
Temperature transient sensitivity	2	m/s ² /K
Magnetic field sensitivity	15	m/s ² /T
Weight without cable	6.2	g
Case material	Aluminum; hard coated	
Connector direction	axial/radial	
Connector	1/4-28 UNF male	
Mounting	M5 (Y/Z); adhesive	


Typical Frequency Response

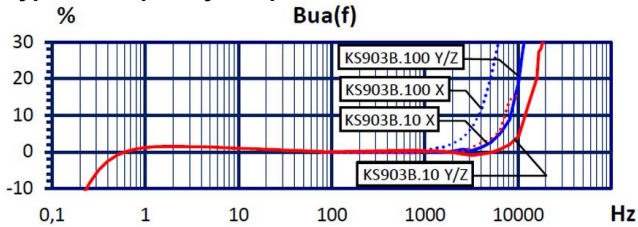


Contact Arrangement



Temperature Coefficient



Noise Characteristics



Connection Accessories

- 091-CMR-B711-3: Cable for IEPE sensors; 3 m; 1/4"-28; 4 pins to Binder 711; male; 80 °C; D5
- 034-B711f-BNC: Adapter Binder 711; 0,5 m; 4 pin; female. to 3 x BNC; male; 80 °C

Mounting Accessories

- 002: Bees wax for temporary sensor attachment
- 003: Mounting stud; M5 x 8
- 045: Thread adapter; M5 x 4 male to UNF 10-32 x 4 male
- 046: Thread adapter; M5 x 4 male to 1/4-28 x 4 male
- 708: Rare earth magnetic base; M5; SW15; 120 °C
- 029: Adhesive insulating flange; M5; D15; >250 °C

Delivery version with accessories kit KS903B10/01

- 091-CMR-B711-3: Cable for IEPE sensors; 3 m; 1/4"-28; 4 pins to Binder 711; male; 80 °C; D5
- 708: Rare earth magnetic base; M5; SW15; 120 °C
- 029: Adhesive insulating flange; M5; D15; >250 °C
- 003: Mounting stud; M5 x 8
- 034-B711f-BNC: Adapter Binder 711; 0,5 m; 4 pin; female. to 3 x BNC; male; 80 °C

Notice: The standard delivery includes an individual data sheet.
Upon request, we also offer DAKKS-accredited calibration.

