# QFA-150-30G-LC Series, Low Input Current Quartz Flexure Accelerometer



Making Sense out of Motion...

The Jewell Instruments
QFA-150-30G-LC Series Accelerometers
are state of the art quartz
flexure technology that provides
high accuracy, repeatability
and stability even in the
harshest of environments.






## **Square Flange - Outline Drawing**

# Features & Benefits


- Mid Range Temperature
- · Excellent Repeatability
- High Accuracy
- Environmentally Rugged
- High Stability
- Square or Round Mounting Flanges
- Small Compact Design
- Built-in Self Test System

# **Applications**

- · Rail Maintenance Track Geometry
- Wind Tunnel Testing
- 3D Modeling Equipment for Large Scale Geometries
- Survey Applications
- Marine Instrumentation
- Borehole Mapping

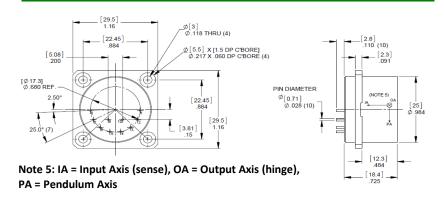

## **Circle Flange - Outline Drawing**

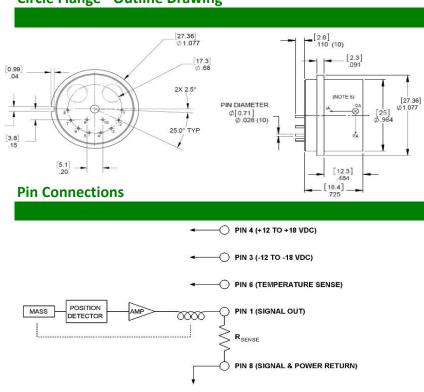

# QFA-150-30G-LC Series, Low Input Current **Quartz Flexure Accelerometer**



# Making Sense out of Motion...

# **Performance Specifications**

### **Performance**

Acceleration Range, g Max. (Note 1)	±30	
Scale Factor, mA/g (Note 2)	1.1 to 1.4	
Bias, milli-g, Max. (@ 25° C)	20	
Axis Alignment, mRad, Max. (@ 25° C)	±1.5	
Threshold and Resolution, µg, Max.	10	
Bandwidth, Hz, Min.	300	
Scale Factor Temp. Sens, PPM/°C, Max.:		
+25°C to +125°C	±150	
+125°C to +150°C	±200	
Bias Temp. Sens. ug/°C. Max.	+100	

Bias Temp. Sens, μg/°C, Max.	±100
Scale Factor Stability (1 year composite)	less than 250 ppm
Bias Stability (1 year composite)	less than 250 ug
Noise, mgrms, Max. (0Hz to 10kHz) (Max.)	3
Weight (grams)	55

#### **Electrical**

Input Voltage, Vdc	±12 to ±18
Input Current, mA	+/-13mA max @ +/-18Vdc input
	+/- 10mA nominal @ +/-15Vdc input
	+/- 8mA nominal @ +/-12Vdc input
Output Impedance, ohms	External Load Resistor Dependent

#### **Environmental**

Operational Temp Range, °C	-55°C to +150°C
Vibration, (Sine)	25 Hz to 500 Hz, 25g
Vibration, (Random) Rectification, ug/g²rms	50 Hz to 500 Hz, 100 ug/g <sup>2</sup> rms
Shock, g (0.5 msec, 1/2 sine)	1000

<sup>\*</sup>Specifications subject to change without notice on account of continued product development

#### **How to Order**

Accelerometers exported from the United States must be done in accordance with the Export Administration Model# Part # Regulations (EAR) and/or the International Traffic in Arms QFA-150-30G-SQ-LC 848786-002 Regulations (ITAR) as applicable. QFA-150-30G-RD-LC 848787-002

Note 1: Specifications apply and are characterized up to ±1g range. The accelerometer is capable of supplying acceleration information up to ±30g but at reduced accuracy.

Note 2: Scale factor shown in mA/g as a standard. If you require scale factor in volts/g, please specify voltage range when ordering Note 3: Voltage output via customer supplied load resistor.